

**RUBBER AIR BRAKE HOSE**



50 Ft. Dispenser Carton



Rubber air brake hose is for use in truck and trailer air brake systems. It is certified to meet S.A.E. J1402 and D.O.T. F.M.V.S.S. 106 requirements. This air brake hose features a synthetic rubber oil-resistant tube and cover which is reinforced with synthetic cord for high performance strength.

**S.A.E. J1402**

**MEETS – D.O.T. F.M.V.S.S. 106**

PART No.	Actual I.D. (IN.)	Hose O.D. (IN.)	Working Pressure (P.S.I.)	Length (FT.)
HAB-6-REEL	3/8	.750	225	250
HAB-6-50P	3/8	.750	225	50
HAB-6RED-REEL	3/8	.750	225	250
HAB-6BLU-REEL	3/8	.750	225	250
HAB-8-REEL	1/2	.875	225	250
HAB-8-50P	1/2	.875	225	50

**HAB-6: MEETS TABLE AI AND TABLE AII**

**HAB-8: MEETS TABLE A**

- **TEMPERATURE:** -40°F to +200°F, -40°C to +93°C
- **PACKAGING:** Reels, 50 Ft. Dispenser Carton (-50P)
- **COLOR:** Standard HAB color is Black, Red and Blue available  
**Note:** Red and Blue hose is only available in -6
- **FITTINGS:** 1490 Series Page 42
- **FACTORY ASSEMBLIES:** Page 103 - 107

**ARCTIC AIR BRAKE HOSE**



Rubber air brake hose is for use in truck and trailer air brake systems. It is certified to meet S.A.E. J1402 and D.O.T. F.M.V.S.S. 106 requirements. This air brake hose features a synthetic rubber tube and cover designed for low temperatures. It is oil-resistant and reinforced with spiral polyester cord for high performance strength.

**S.A.E. J1402**

**MEETS – D.O.T. F.M.V.S.S. 106**

PART No.	Actual I.D. (IN.)	Hose O.D. (IN.)	Working Pressure (P.S.I.)	Reel Length (FT.)
HABA-6-REEL	3/8	.750	200	250
HABA-8-REEL	1/2	.875	200	250

**HABA-6: MEETS TABLE AI AND TABLE AII**

**HABA-8: MEETS TABLE A**

- **TEMPERATURE:** -65°F to +200°F, -54°C to +93°C
- **PACKAGING:** Reels
- **FITTINGS:** 1490 Series Page 42
- **FACTORY ASSEMBLIES:** Page 103 - 107

**AIR BRAKE HOSE ASSEMBLY KITS**



Not exactly as shown.

Ideal for start-up, each Fairview air brake hose assembly kit contains three of each of our most popular assemblies (45 hoses total)



**HAR-15 (Rack Only)**

**PART No. HAB-6-KIT 3/8" I.D. Hose Assemblies**

3/8 Swivel X 3/8 Rigid Male Pipe (For Swivel b/e use suffix -SW)

PART No.	Length (IN.)	PART No.	Length (IN.)
HAB-6-18C	18	HAB-6-36C-SW	36
HAB-6-20C	20	HAB-6-40C	40
HAB-6-24C	24	HAB-6-42C	42
HAB-6-26C	26	HAB-6-48C	48
HAB-6-28C	28	HAB-6-60C	60
HAB-6-30C	30	HAB-6-72C	72
HAB-6-32C	32	HAB-6-108C	108
HAB-6-36C	36	HAR-15 (Rack)	

**PART No. HAB-8-KIT 1/2" I.D. Hose Assemblies**


3/8 Swivel X 3/8 Rigid Male Pipe (For Swivel b/e use suffix -SW)

PART No.	Length (IN.)	PART No.	Length (IN.)
HAB-8-20C	20	HAB-8-36C-SW	36
HAB-8-24C	24	HAB-8-42C	42
HAB-8-26C	26	HAB-8-48C	48
HAB-8-28C	28	HAB-8-54C	54
HAB-8-30C	30	HAB-8-60C	60
HAB-8-32C	32	HAB-8-72C	72
HAB-8-34C	32	HAB-8-96C	96
HAB-8-36C	36	HAR-15 (Rack)	

## CRIMPED RUBBER AIR BRAKE HOSE ASSEMBLIES D.O.T. -40°F to +200°F, -40°C to +93°C TEMPERATURE RANGE

- D.O.T. Listed • 225 P.S.I. Working Pressure • -40°F to +200°F, -40°C to +93°C
- Many Other Common Lengths Available From Stock. Custom Lengths On Request.
- For Assemblies Requiring -65°F, -54°C Cold Weather Arctic Hose Simply Replace "HAB" Prefix With "HABA" (HABA-6-24B) • Bulk Hose Page 102 • Display Rack Page 278

Length Up to 36"	Tolerance ±1/4"
Above 36"	±1% of length

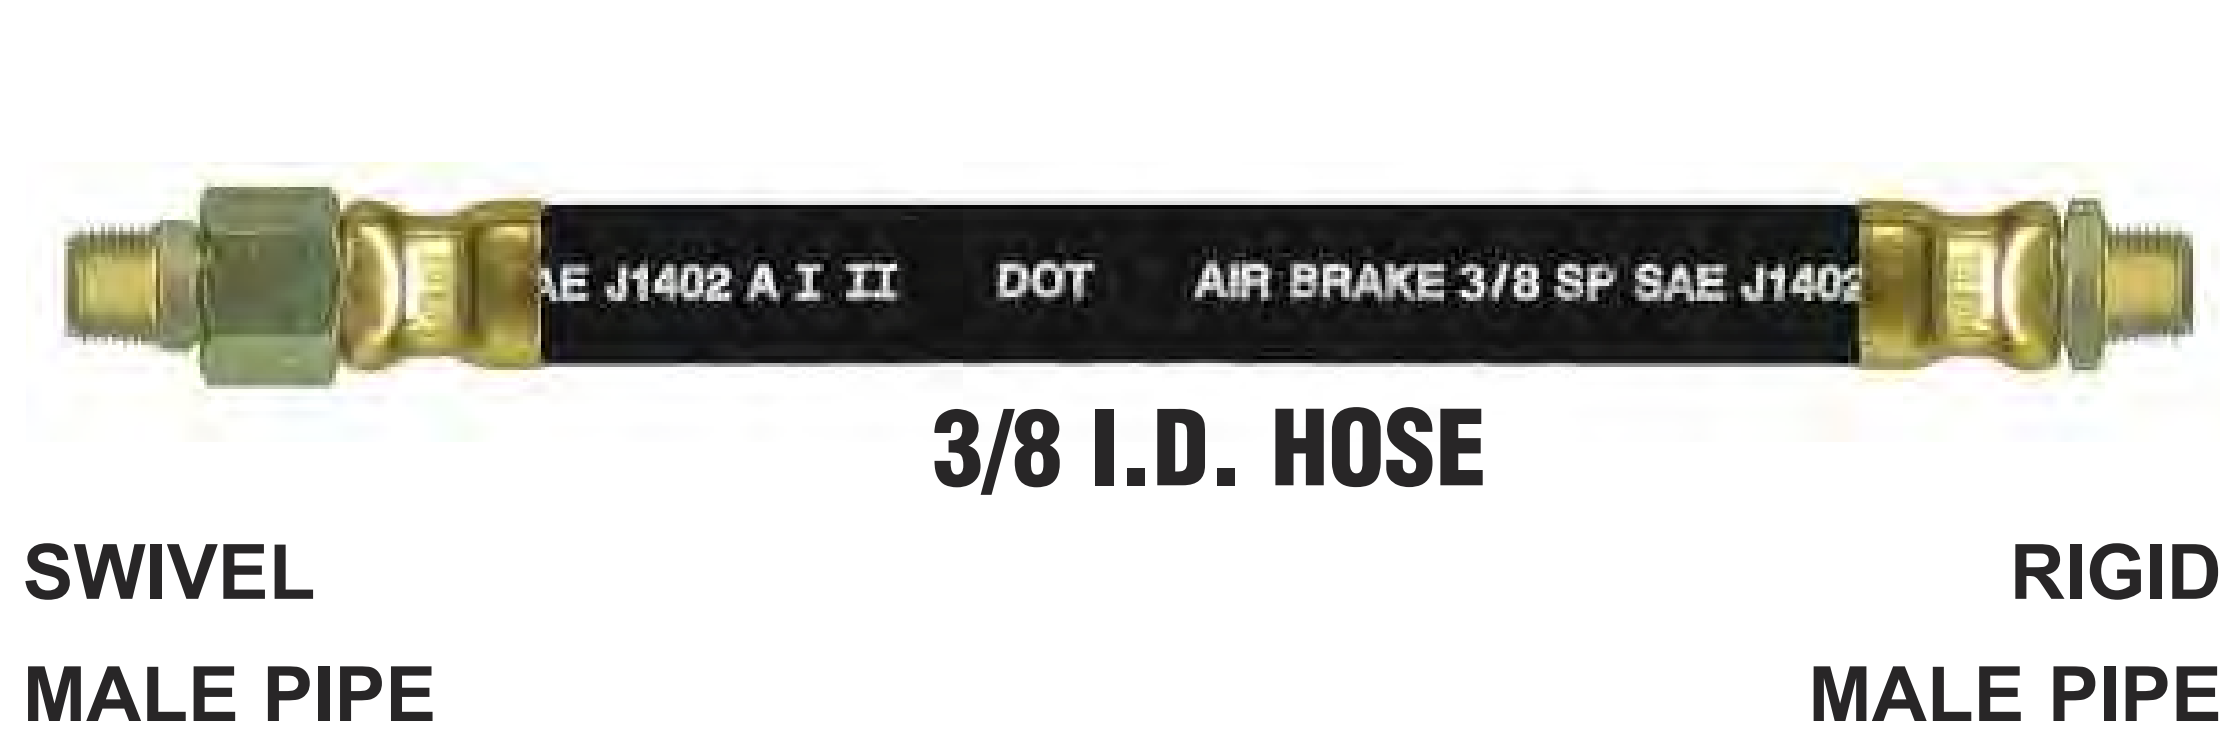

PART No.	Pipe Size	Hose I.D. (IN.)	Hose
HAB-6-__B	1/4	3/8	Rubber
HAB-6-__C	3/8	3/8	Rubber
HABA-6-__B	1/4	3/8	Arctic Hose
HABA-6-__C	3/8	3/8	Arctic Hose

• NOTE: \_\_ ENTER OVERALL LENGTH IN INCHES WHERE APPLICABLE.




PART No.	Pipe Size	Hose I.D. (IN.)	Hose
HAB-8-__C	3/8	1/2	Rubber
HAB-8-__CD	1/2 TO 3/8	1/2	Rubber
HABA-8-__C	3/8	1/2	Arctic Hose
HABA-8-__CD	1/2 TO 3/8	1/2	Arctic Hose

• NOTE: \_\_ ENTER OVERALL LENGTH IN INCHES WHERE APPLICABLE.




PART No.	Pipe Size	Hose I.D. (IN.)	Hose
HAB-6-__BLSB	1/4	3/8	Rubber
HAB-6-__CLSC	3/8	3/8	Rubber
HABA-6-__BLSB	1/4	3/8	Arctic Hose
HABA-6-__CLSC	3/8	3/8	Arctic Hose

• NOTE: \_\_ ENTER OVERALL LENGTH IN INCHES WHERE APPLICABLE.

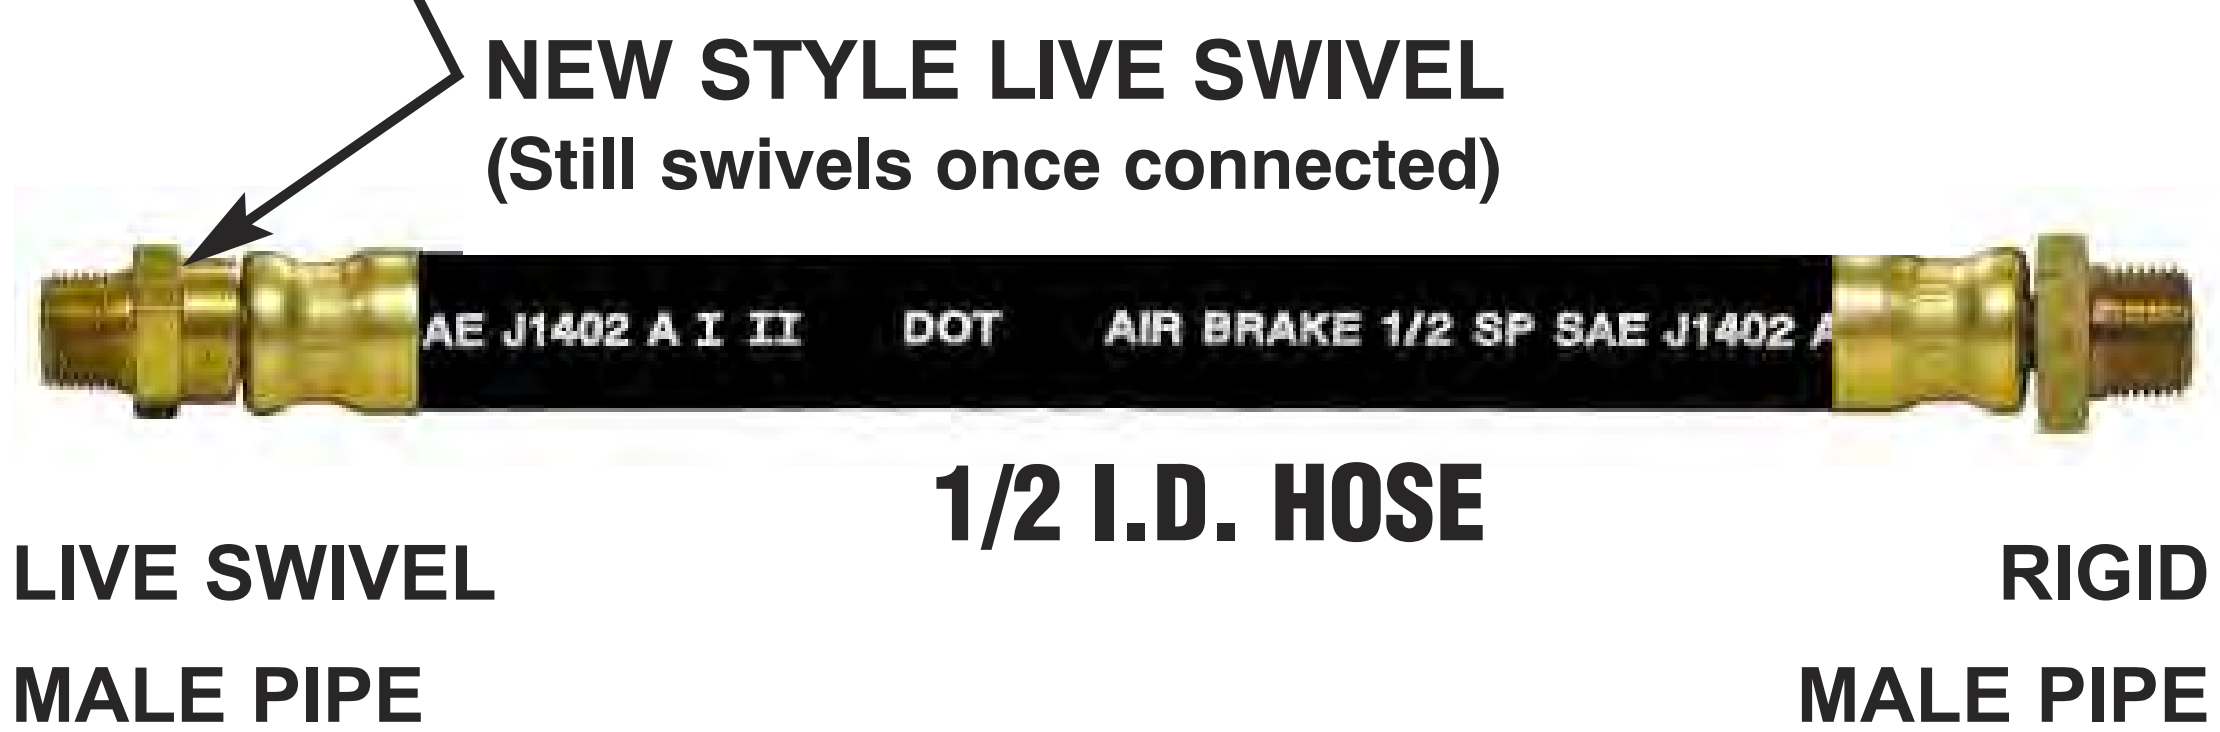


PART No.	Pipe Size	Hose I.D. (IN.)	Hose
HAB-8-__CLSC	3/8	1/2	Rubber
HAB-8-__DLSC	1/2 TO 3/8	1/2	Rubber
HABA-8-__CLSC	3/8	1/2	Arctic Hose
HABA-8-__DLSC	1/2 TO 3/8	1/2	Arctic Hose

• NOTE: \_\_ ENTER OVERALL LENGTH IN INCHES WHERE APPLICABLE.

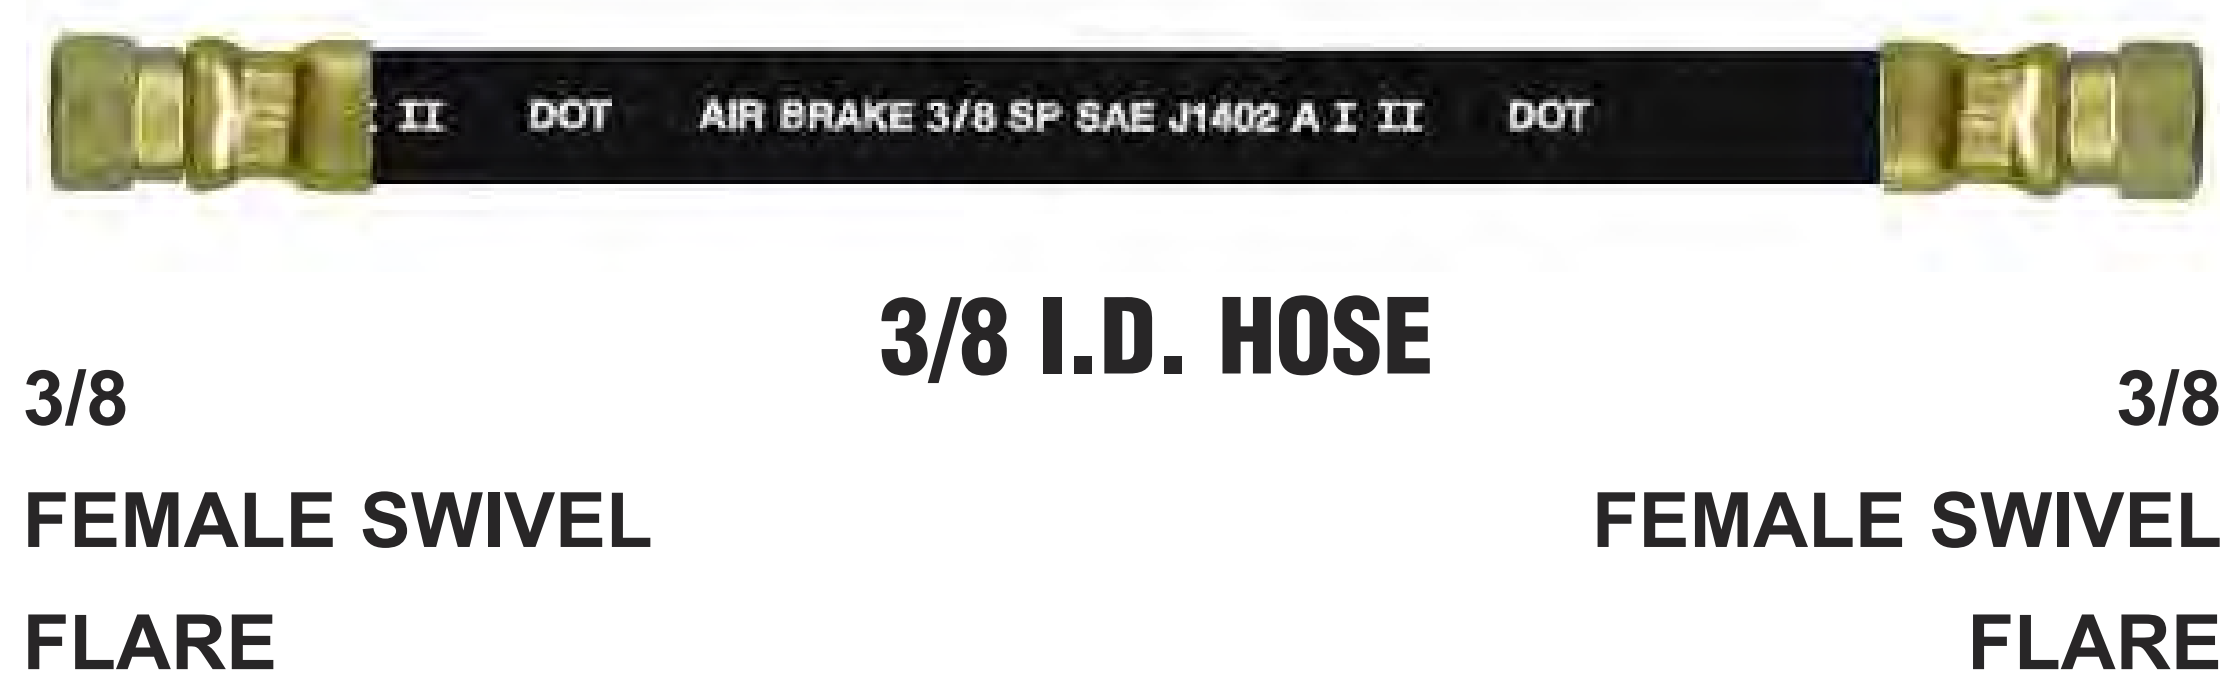

PART No.	Flare Size	Hose I.D. (IN.)	Hose
HAB-6-__FS	3/8	3/8	Rubber
HABA-6-__FS	3/8	3/8	Arctic Hose

• NOTE: \_\_ ENTER OVERALL LENGTH IN INCHES WHERE APPLICABLE.

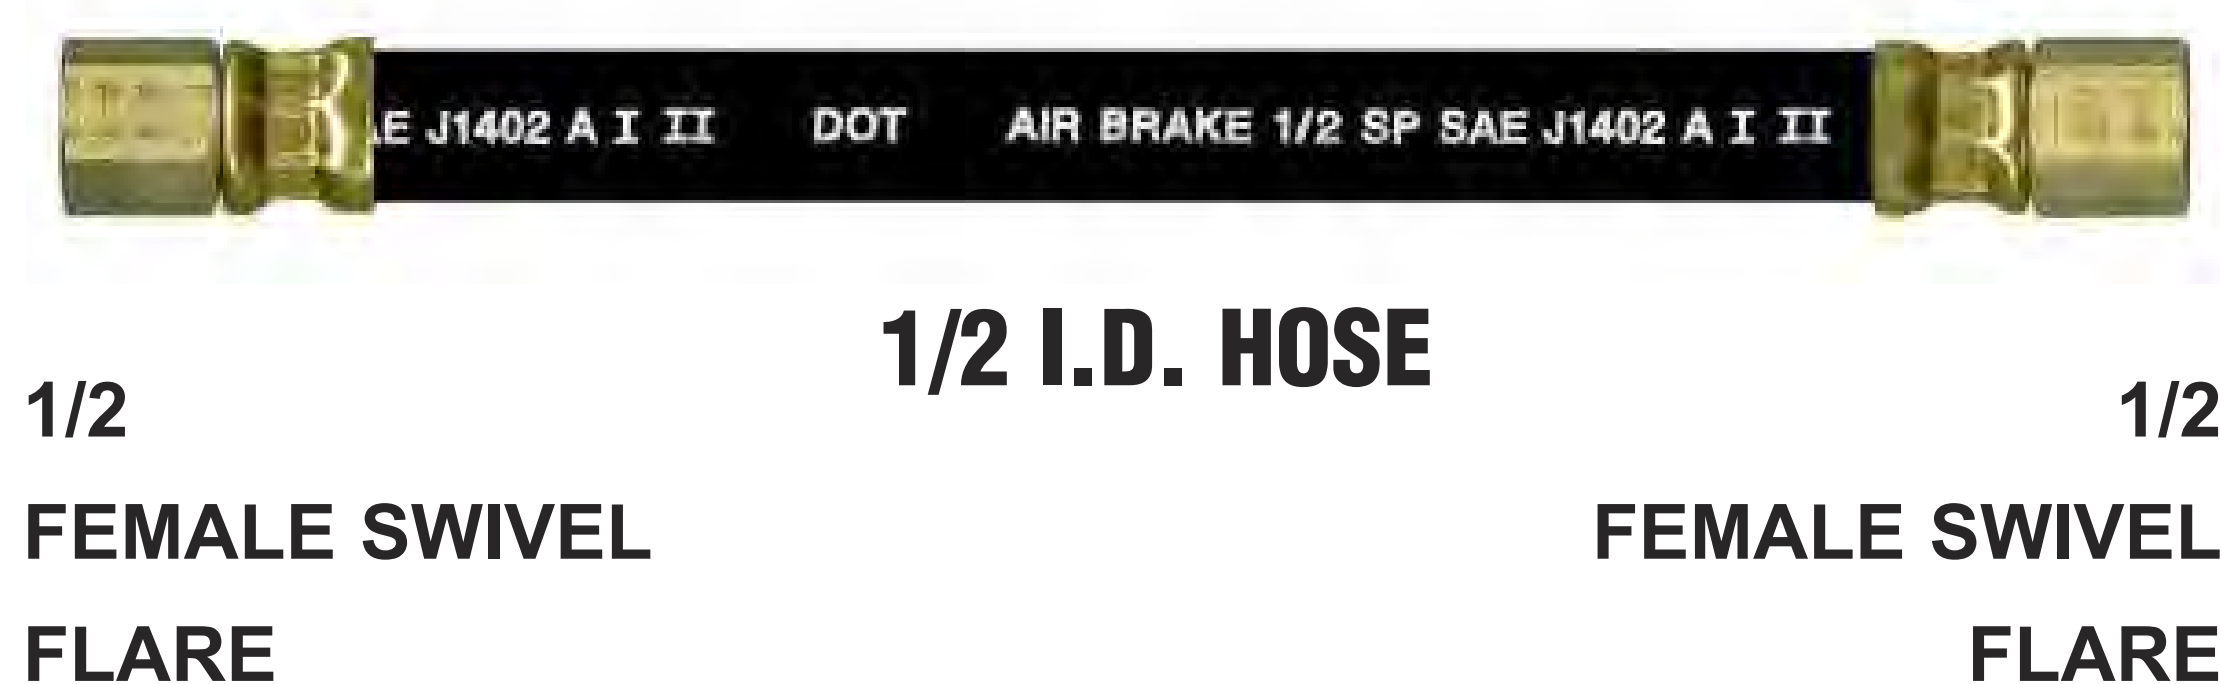

PART No.	Flare Size	Hose I.D. (IN.)	Hose
HAB-8-__FS	1/2	1/2	Rubber
HABA-8-__FS	1/2	1/2	Arctic Hose

• NOTE: \_\_ ENTER OVERALL LENGTH IN INCHES WHERE APPLICABLE.

- STANDARD ASSEMBLIES RANGE IN LENGTH FROM 16 TO 96 INCHES X 2 INCH INCREMENTS
- ALSO AVAILABLE WITH SPRING GUARD SUFFIX WITH -SG

**CAUTION: Some agents used in the curing of rubber hose may leach out over time. Trace amounts may be enough to cause problems for sensitive hands. Gloves should be worn and care taken in handling of rubber hose products.**

## CRIMPED RUBBER AIR BRAKE HOSE ASSEMBLIES D.O.T. -40°F to +200°F, -40°C to +93°C TEMPERATURE RANGE

• D.O.T. Listed • 225 P.S.I. Working Pressure • -40°F to +200°F, -40°C to +93°C  
 • Many Other Common Lengths Available From Stock. Custom Lengths On Request.  
 • For Assemblies Requiring -65°F, -54°C Cold Weather Arctic Hose Simply Replace "HAB" Prefix With "HABA" (HABA-6-24B) • Bulk Hose Page 102 • Display Rack Page 278

Length Up to 36"	Tolerance ±1/4"
Above 36"	±1% of length



**3/8 I.D. HOSE**  
 3/8 SWIVEL MALE PIPE      3/8 SWIVEL MALE PIPE

PART No.	SW Pipe Size	Hose I.D. (IN.)	Hose
HAB-6-__C-SW	3/8	3/8	Rubber
HABA-6-__C-SW	3/8	3/8	Arctic Hose

• NOTE: \_\_ ENTER OVERALL LENGTH IN INCHES WHERE APPLICABLE.



**1/2 I.D. HOSE**  
 SWIVEL MALE PIPE      SWIVEL MALE PIPE

PART No.	SW Pipe Size	Hose I.D. (IN.)	Hose
HAB-8-__C-SW	3/8	1/2	Rubber
HAB-8-__D-SW	1/2	1/2	Rubber
HABA-8-__C-SW	3/8	1/2	Arctic Hose
HABA-8-__D-SW	1/2	1/2	Arctic Hose

• NOTE: \_\_ ENTER OVERALL LENGTH IN INCHES WHERE APPLICABLE.



**3/8 I.D. HOSE**  
 3/8 LIVE SWIVEL MALE PIPE      3/8 LIVE SWIVEL MALE PIPE

PART No.	LSW Pipe Size	Hose I.D. (IN.)	Hose
HAB-6-__C-LSW	3/8	3/8	Rubber
HABA-6-__C-LSW	3/8	3/8	Arctic Hose

• NOTE: \_\_ ENTER OVERALL LENGTH IN INCHES WHERE APPLICABLE.



**1/2 I.D. HOSE**  
 LIVE SWIVEL MALE PIPE      LIVE SWIVEL MALE PIPE  
 NEW STYLE LIVE SWIVEL (Still swivels once connected)

PART No.	LSW Pipe Size	Hose I.D. (IN.)	Hose
HAB-8-__C-LSW	3/8	1/2	Rubber
HAB-8-__D-LSW	1/2	1/2	Rubber
HABA-8-__C-LSW	3/8	1/2	Arctic Hose
HABA-8-__D-LSW	1/2	1/2	Arctic Hose

• NOTE: \_\_ ENTER OVERALL LENGTH IN INCHES WHERE APPLICABLE.

### AIR BRAKE ASSEMBLIES D.O.T. (WITH SPRING GUARD)




**3/8" SWIVEL MALE PIPE**      **1/2" RIGID MALE PIPE**

PART No.	Length (IN.)	Hose I.D. (IN.)
HAB-6-13.62CD-SG	13.62	3/8
HAB-8-13.62CD-SG	13.62	1/2

NOTE: ADDITIONAL LENGTHS AVAILABLE ON REQUEST. ENDS ARE COMPLETE WITH THREAD SEALANT.

### AIR BRAKE ASSEMBLIES D.O.T. (GLADHAND ADAPTER)

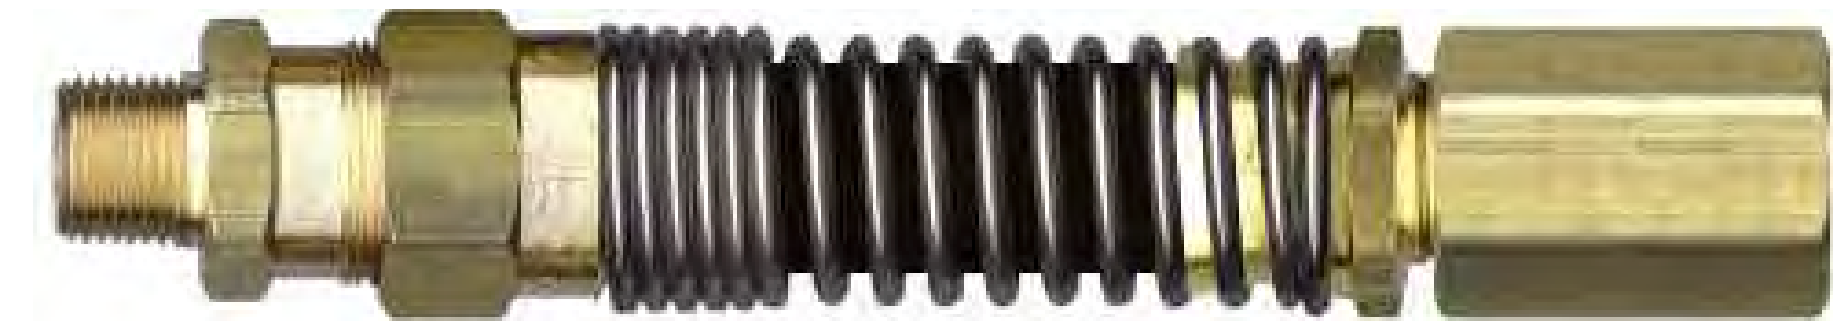

- Greater Flexibility • Easy Attachment of Gladhand
- Cost Effective Alternative to the Swing Away Gladhand

PART No.	Description:	PART No.	Description:
HAB-NOSE BOX-1	• 3/8" I.D. Hose • 1/2" NPT Reusable End • 1/2" NPT Crimp End • 6" Overall Length	HAB-NOSE BOX-2	• 3/8" I.D. Hose • 1/2" NPT Reusable End • 1/2" FPT Crimp End • 6" Overall Length

ALTERNATIVE TO A SOLID SWIVEL GLADHAND. GLADHAND SOLD SEPARATELY PAGE 182

**CAUTION: Some agents used in the curing of rubber hose may leach out over time. Trace amounts may be enough to cause problems for sensitive hands. Gloves should be worn and care taken in handling of rubber hose products.**

## BULKHEAD AND SLIDER HOSE ASSEMBLIES -40°F to +200°F, -40°C to +93°C TEMPERATURE RANGE

- D.O.T. Listed • 225 P.S.I. Working Pressure • -40°F to +200°F, -40°C to +93°C
- Many Other Common Lengths Available From Stock. Custom Lengths On Request.
- For Assemblies Requiring -65°F, -54°C Cold Weather Arctic Hose Simply Replace "HAB" Prefix With "HABA" (HABA-6-24B) • Bulk Hose Page 102 • Display Rack Page 278

Length	Tolerance
Up to 36"	±1/4"
Above 36"	±1% of length

### BULKHEAD HOSE ASSEMBLY



**3/8 I.D. HOSE**

1/2 MALE BULKHEAD X 1/4 FEMALE PIPE WITH SPRING GUARDS (-SG) NEW STYLE LIVE SWIVEL (Still swivels once connected) 3/8 LIVE SWIVEL MALE PIPE

PART No.	F Pipe Size	SW Pipe Size	Hose I.D. (IN.)	Hose
HAB-6-__BHBLSC-SG	1/4	3/8	3/8	Rubber
HABA-6-__BHBLSC-SG	1/4	3/8	3/8	Arctic Hose

• NOTE: \_\_ ENTER OVERALL LENGTH IN INCHES WHERE APPLICABLE.

### SERVICEABLE SLIDER HOSE ASSEMBLY



7/8-20 MOUNTING THREAD

**3/8 I.D. HOSE**

D.O.T. AIR BRAKE TUBE WITH SPRING GUARDS (-SG) NEW STYLE LIVE SWIVEL (Still swivels once connected) 3/8 LIVE SWIVEL MALE PIPE

PART No.	LSW Pipe Size	Tube Size	Hose I.D. (IN.)	Hose
HAB-6-__SABH6-SG	3/8	3/8	3/8	Rubber
HAB-6-__SABH8-SG	3/8	1/2	3/8	Rubber
HABA-6-__SABH6-SG	3/8	3/8	3/8	Arctic Hose
HABA-6-__SABH8-SG	3/8	1/2	3/8	Arctic Hose

• NOTE: \_\_ ENTER OVERALL LENGTH IN INCHES WHERE APPLICABLE.

### CONTROL LINE SLIDER HOSE ASSEMBLY



7/8-20 MOUNTING THREAD

**1/4 I.D. HOSE**

D.O.T. AIR BRAKE TUBE WITH SPRING GUARDS ADD (-SG) D.O.T. AIR BRAKE TUBE

PART No.	AB Tube Size	Hose I.D. (IN.)	Hose
HAB-4-__ABH6	3/8	1/4	Rubber
HABA-4-__ABH6	3/8	1/4	Arctic Hose

• NOTE: \_\_ ENTER OVERALL LENGTH IN INCHES WHERE APPLICABLE.

• SEE PAGE 114 FOR AIR SHIFT TRANSMISSION ASSEMBLIES.

### SLIDER AXLE HOSE ASSEMBLY



7/8-20 MOUNTING THREAD

**WITH SPRING GUARDS (-SG)**

D.O.T. AIR BRAKE TUBE WITH SPRING GUARDS (-SG) D.O.T. AIR BRAKE TUBE

PART No.	AB Tube Size	Hose I.D. (IN.)	Hose
HAB-6-__ABH6-SG	3/8	3/8	Rubber
HAB-6-__ABH8-SG	1/2	3/8	Rubber
HAB-8-__ABH8-SG	1/2	1/2	Rubber
HABA-6-__ABH6-SG	3/8	3/8	Arctic Hose
HABA-6-__ABH8-SG	1/2	3/8	Arctic Hose
HABA-8-__ABH8-SG	1/2	1/2	Arctic Hose

• NOTE: \_\_ ENTER OVERALL LENGTH IN INCHES WHERE APPLICABLE.

**CAUTION:** Some agents used in the curing of rubber hose may leach out over time. Trace amounts may be enough to cause problems for sensitive hands. Gloves should be worn and care taken in handling of rubber hose products.