



POWERATED™

GREEN TEXTILE WRAPPED V-BELT WITH ARAMID CORD

Designed as an alternative to conventional light-duty belts, with high-performance construction to deliver more horsepower, less stretch, and provide longer service life.

CONSTRUCTION + SPECIFICATIONS

- **Bareback construction** for smooth clutching on shock loaded, backside-idler driven equipment.
- **Aramid tensile cords** combine limited stretch with extraordinary strength and durability.

FEATURES + BENEFITS


- Suitable for outdoor power equipment, appliances, and industrial applications where Fractional Horsepower (FHP) belts are typically used.
- Low cord positioning in thin profile gives extreme flexibility.
- Meets ARPM/RMA IP-3-2 oil and heat resistant standards.
- REACH and RoHS 2 compliant.
- Operating temperature range: -30°C/-22°F to +60°C/140°F.

BELT IDENTIFICATION

Singles: **6726 / 3L260K**
67 / 3L - Cross Section
26 / 260 - Outside Circumference (in) / Outside Circumference (in), plus added zero to designate part number
K - Aramid Designation

Available Stock Sizes
67/3L 16-74 (in)
68/4L 17-117 (in)
69/5L 23-100 (in)

Belt Identification Chart

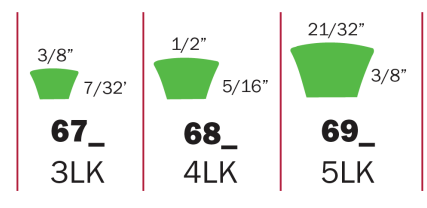




PowerRated® V-Belts

Product No. Series 8423 (continued)

2 or 4L Section (continued)

Part No.	Industry No.	Product No.	O.C. (in)	Weight (Lbs.)	Customer Pack	Part No.	Industry No.	Product No.	O.C. (in)	Weight (Lbs.)	Customer Pack
6863	4L630K	8423-6863	63.00	.380	1	6884	4L840K	8423-6884	84.00	.510	1
6864	4L640K	8423-6864	64.00	.390	1	6885	4L850K	8423-6885	85.00	.510	1
6865	4L650K	8423-6865	65.00	.390	1	6886	4L860K	8423-6886	86.00	.520	1
6866	4L660K	8423-6866	66.00	.400	1	6887	4L870K	8423-6887	87.00	.530	1
6867	4L670K	8423-6867	67.00	.400	1	6888	4L880K	8423-6888	88.00	.530	1
6868	4L680K	8423-6868	68.00	.410	1	6889	4L890K	8423-6889	89.00	.540	1
6869	4L690K	8423-6869	69.00	.420	1	6890	4L900K	8423-6890	90.00	.550	1
6870	4L700K	8423-6870	70.00	.430	1	6891	4L910K	8423-6891	91.00	.550	1
6871	4L710K	8423-6871	71.00	.430	1	6892	4L920K	8423-6892	92.00	.560	1
6872	4L720K	8423-6872	72.00	.440	1	6893	4L930K	8423-6893	93.00	.560	1
6873	4L730K	8423-6873	73.00	.450	1	6894	4L940K	8423-6894	94.00	.570	1
6874	4L740K	8423-6874	74.00	.450	1	6895	4L950K	8423-6895	95.00	.580	1
6875	4L750K	8423-6875	75.00	.460	1	6896	4L960K	8423-6896	96.00	.580	1
6876	4L760K	8423-6876	76.00	.450	1	6897	4L970K	8423-6897	97.00	.590	1
6877	4L770K	8423-6877	77.00	.470	1	6898	4L980K	8423-6898	98.00	.590	1
6878	4L780K	8423-6878	78.00	.470	1	6899	4L990K	8423-6899	99.00	.600	1
6879	4L790K	8423-6879	79.00	.480	1	68100	4L1000K	8423-8100	100.00	.650	1
6880	4L800K	8423-6880	80.00	.480	1	68105	4L1050K	8423-8105	105.00	.700	1
6881	4L810K	8423-6881	81.00	.490	1	68107	4L1070K	8423-8107	107.00	.700	1
6882	4L820K	8423-6882	82.00	.500	1	68117	4L1170K	8423-8117	117.00	.750	1
6883	4L830K	8423-6883	83.00	.500	1						



3 or 5L Section

Part No.	Industry No.	Product No.	O.C. (in)	Weight (Lbs.)	Customer Pack	Part No.	Industry No.	Product No.	O.C. (in)	Weight (Lbs.)	Customer Pack
6923	5L230K	8423-6923	23.00	.200	1	6956	5L560K	8423-6956	56.00	.540	1
6924	5L240K	8423-6924	24.00	.230	1	6957	5L570K	8423-6957	57.00	.550	1
6925	5L250K	8423-6925	25.00	.240	1	6958	5L580K	8423-6958	58.00	.550	1
6926	5L260K	8423-6926	26.00	.250	1	6959	5L590K	8423-6959	59.00	.560	1
6927	5L270K	8423-6927	27.00	.260	1	6960	5L600K	8423-6960	60.00	.570	1
6928	5L280K	8423-6928	28.00	.270	1	6961	5L610K	8423-6961	61.00	.580	1
6929	5L290K	8423-6929	29.00	.280	1	6962	5L620K	8423-6962	62.00	.590	1
6930	5L300K	8423-6930	30.00	.290	1	6963	5L630K	8423-6963	63.00	.600	1
6931	5L310K	8423-6931	31.00	.300	1	6964	5L640K	8423-6964	64.00	.610	1
6932	5L320K	8423-6932	32.00	.310	1	6965	5L650K	8423-6965	65.00	.620	1
6933	5L330K	8423-6933	33.00	.320	1	6966	5L660K	8423-6966	66.00	.620	1
6934	5L340K	8423-6934	34.00	.330	1	6967	5L670K	8423-6967	67.00	.630	1
6935	5L350K	8423-6935	35.00	.340	1	6968	5L680K	8423-6968	68.00	.650	1
6936	5L360K	8423-6936	36.00	.350	1	6969	5L690K	8423-6969	69.00	.660	1
6937	5L370K	8423-6937	37.00	.360	1	6970	5L700K	8423-6970	70.00	.670	1
6938	5L380K	8423-6938	38.00	.360	1	6971	5L710K	8423-6971	71.00	.680	1
6939	5L390K	8423-6939	39.00	.370	1	6972	5L720K	8423-6972	72.00	.680	1
6940	5L400K	8423-6940	40.00	.380	1	6973	5L730K	8423-6973	73.00	.700	1
6941	5L410K	8423-6941	41.00	.390	1	6974	5L740K	8423-6974	74.00	.750	1
6942	5L420K	8423-6942	42.00	.400	1	6975	5L750K	8423-6975	75.00	.710	1
6943	5L430K	8423-6943	43.00	.410	1	6976	5L760K	8423-6976	76.00	.720	1
6944	5L440K	8423-6944	44.00	.420	1	6977	5L770K	8423-6977	77.00	.730	1
6945	5L450K	8423-6945	45.00	.430	1	6978	5L780K	8423-6978	78.00	.740	1
6946	5L460K	8423-6946	46.00	.440	1	6979	5L790K	8423-6979	79.00	.750	1
6947	5L470K	8423-6947	47.00	.450	1	6980	5L800K	8423-6980	80.00	.760	1
6948	5L480K	8423-6948	48.00	.460	1	6981	5L810K	8423-6981	81.00	.770	1
6949	5L490K	8423-6949	49.00	.470	1	6982	5L820K	8423-6982	82.00	.780	1
6950	5L500K	8423-6950	50.00	.480	1	6983	5L830K	8423-6983	83.00	.790	1
6951	5L510K	8423-6951	51.00	.490	1	6984	5L840K	8423-6984	84.00	.800	1
6952	5L520K	8423-6952	52.00	.500	1	6985	5L850K	8423-6985	85.00	.810	1
6953	5L530K	8423-6953	53.00	.510	1	6986	5L860K	8423-6986	86.00	.820	1
6954	5L540K	8423-6954	54.00	.510	1	6987	5L870K	8423-6987	87.00	.830	1
6955	5L550K	8423-6955	55.00	.520	1	6988	5L880K	8423-6988	88.00	.840	1

**PowerRated® V-Belts****Product No. Series 8423 (continued)****3 or 5L Section (continued)**

Part No.	Industry No.	Product No.	O.C. (in)	Weight (Lbs.)	Customer Pack	Part No.	Industry No.	Product No.	O.C. (in)	Weight (Lbs.)	Customer Pack
6989	5L890K	8423-6989	89.00	.850	1	6995	5L950K	8423-6995	95.00	.900	1
6990	5L900K	8423-6990	90.00	.850	1	6996	5L960K	8423-6996	96.00	.910	1
6991	5L910K	8423-6991	91.00	.860	1	6997	5L970K	8423-6997	97.00	.920	1
6992	5L920K	8423-6992	92.00	.870	1	6998	5L980K	8423-6998	98.00	.930	1
6993	5L930K	8423-6993	93.00	.880	1	6999	5L990K	8423-6999	99.00	.940	1
6994	5L940K	8423-6994	94.00	.890	1	69100	5L1000K	8423-9100	100.00	.900	1