

KINEDYNE® LIFTING SLINGS

TYPE 4 - TWISTED EYE-TO-EYE SLINGS



ENGINEERED TO BE TOUGH,
FLEXIBLE, SECURE AND
LIGHTWEIGHT.




Meets or exceeds:
OSHA, ASME B30.9 and WSTDA
Standards and Regulations

KEY FEATURES:

- ☛ Eye turned/twisted 90 degrees for smoother Choker hitch and better basket hitch fit
- ☛ Flexible and Lightweight
- ☛ 2-Ply polyester for reduced stretch, increased Strength and moisture and abrasion resistant
- ☛ Available in 1" and 2"

RATED FOR:

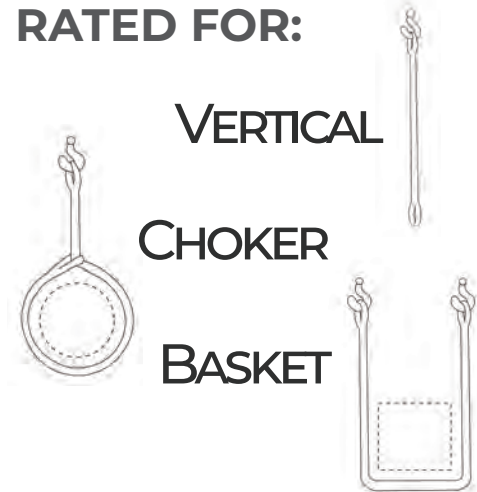

Customer Service - United States

Phone: (800) 848-6057
E-mail: customerservice@kinedyne.com

3040 US Highway 22 West Suite 150
Branchburg, NJ 08876

Customer Service - Canada

Phone: (800) 268-3530
E-mail: orderdesk@kinedyne.com

10 Maybrook Drive
Toronto, Ontario M1V 4B6



TYPE 4 - TWISTED EYE-TO-EYE SLINGS

COMPLETE LINE OF KINEDYNE LIFTING SLINGS

	Working Load Limit Vertical (lbs)	Working Load Limit Vertical (kgs)	Working Load Limit Choker (lbs)	Working Load Limit Choker (kgs)	Working Load Limit Vertical Basket (lbs)	Working Load Limit Vertical Basket (kgs)
EE2-9801X4-KIN	3100	1400	2450	1125	6200	2800
EE2-9801X8-KIN	3100	1400	2450	1125	6200	2800
EE2-9802X10-KIN	6200	2800	4950	2250	12400	5600
EE2-9802X12-KIN	6200	2800	4950	2250	12400	5600
EE2-9802X16-KIN	6200	2800	4950	2250	12400	5600
EE2-9802X20-KIN	6200	2800	4950	2250	12400	5600
EE2-9802X30-KIN	6200	2800	4950	2250	12400	5600
EE2-9802X3-KIN	6200	2800	4950	2250	12400	5600
EE2-9802X4-KIN	6200	2800	4950	2250	12400	5600
EE2-9802X6-KIN	6200	2800	4950	2250	12400	5600
EE2-9802X8-KIN	6200	2800	4950	2250	12400	5600