

MICROFLEX®


▲ SUPRENO® SE

BLUE
NITRILE
NON-STERILE
AMBIDEXTROUS
TEXTURED FINGERS
BEADED CUFF
FOR SINGLE USE ONLY
NON-LATEX

POWDER-FREE EXTENDED CUFF EXAMINATION GLOVES

Supreno® SE gloves provide the durability needed for demanding applications. Offering all the benefits of a nitrile glove, Supreno® SE meets your requirement of strength and comfort.

- Lowest pinhole rates (AQL 0.65) sets a new standard for protection
- Provides durable, heavy-duty coverage
- Non-stick properties resist tape and adhesives

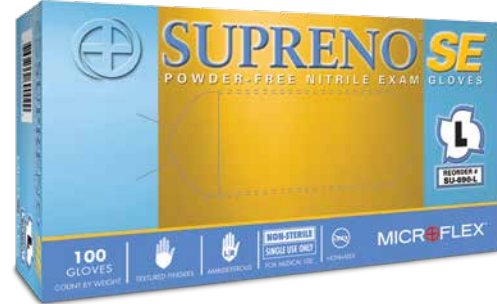

PRODUCT CODE		PACKAGING	
XS	SU-690-XS	100	Gloves/Box
S	SU-690-S	10	Boxes/Case
M	SU-690-M		
L	SU-690-L		
XL	SU-690-XL		

GLOVE PROFILE		ASTM D 6319	SUPRENO® SE
Length	mm (inches)	min. 220 (8.7)	245 (9.6)
Cuff Thickness	mm (mils)	n/a	0.09 (3.5)
Palm Thickness	mm (mils)	min. 0.05 (2.0)	0.11 (4.3)
Finger Thickness	mm (mils)	min. 0.05 (2.0)	0.18 (7.1)
Tensile Strength	Before Aging	min. 14	30
	After Aging	min. 14	30
Elasticity/Elongation	Before Aging	min. 500	500
	After Aging	min. 400	400
Pinhole Defect Rate*	(AQL)	max. 2.5	0.65

* Pinhole Defect Rate is FDA minimum requirement.



RECOMMENDED
INDUSTRIES