

JOYSTICK HANDLES

GENERAL SPECIFICATIONS

- POSSIBLE INSERTION OF PUSH BUTTONS: 1, 2, 4, 6.
- PVC CABLES WITH DIAMETER FROM 0.5 MM^2 AND 256 WIRES FOR CABLE, STANDARD WIRE LENGHT 350 MM FROM THE HANDLE'S BASE.
- CABLES TERMINAL SUPPLIED WITHOUT LEAD-IN WIRE.
- MAX CURRENT ON CONTACTS : 3 AMPERE.
- SAFETY PUSH BUTTON ON REQUEST.
- ELECTRICAL LIFE : 10^6 CYCLES (1 CYCLE = 2 SEC. "ON" / 2 SEC. OFF WITH CURRENT = 3A VOLTAGE = 12VDC AND WITH ARC SUPPRESSOR DIODE) 10^5 CYCLES IF USED WITH CURRENT = 3A VOLTAGE = 12VDC AND WITH DIRECT CONNECTION.
- MECHANICAL LIFE : 10^6 CYCLES.

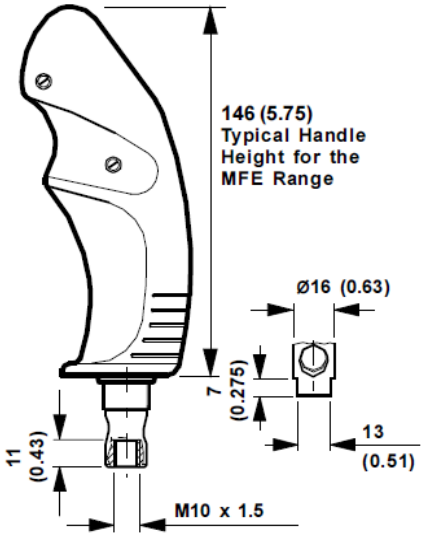

NUMBER OF PUSH BUTTON			
E9634006903	E9634006803	E9634006923	E9634006913
			

ECONOMIC HANDLES
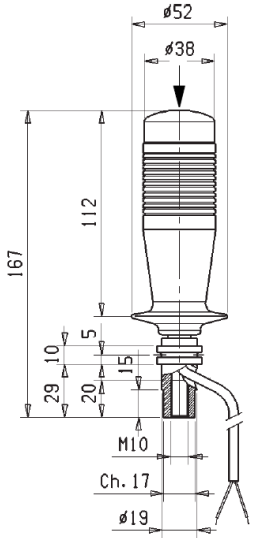
PART NUMBER	DESCRIPTION
G9466012331	1 CONTACT
G9466012351	2 CONTACTS
E9634005553	2 DETENTS