

HIGH PRESSURE SPRAY GUNS

P11 - Spray Gun

Part No.	Inlet
P11	3/8" BSP-F

- 3000 psi Rated Pressure
- 10.5 gpm Max Flow
- 284°F Max Temperature
- 1/4" BSP-F Outlet
- Replacement Gun for Formula100 & Turbo21



P6R - Consumer Gun

Part No.
P6R

- 1500 psi Rated Pressure
- 1.8 gpm Max Flow
- Black Abrasion Resistant Cover
- For Use with Cold Water
- Replacement Gun for KODIAK4000R



RL16 - Spray Gun

Part No.	Inlet
RL16	3/8" NPT-F

- 2300 psi Rated Pressure
- 8.0 gpm Max Flow
- 210°F Max Temperature
- 1/4" NPT-F Outlet



RL26 - Weep Gun

Part No.	Inlet
RL26	3/8" NPT-F
RL26W	3/8" NPT-F Weep

- 4050 psi Rated Pressure
- 8.0 gpm Max Flow
- 210°F Max Temperature
- 1/4" NPT-F Outlet



RL37 - Spray Gun

Part No.	Inlet
RL37	3/8" NPT-F

- 4500 psi Rated Pressure
- 10.5 gpm Max Flow
- 320°F Max Temperature
- 1/4" NPT-F Outlet



G250VA - Spray Gun

Part No.	Inlet
G250VA	3/8" NPT-F
G250VW	3/8" NPT-F Weep
G250VASW	3/8" NPT-F sw

- 4500 psi Rated Pressure
- 10.5 gpm Max Flow
- 320°F Max Temperature



G250VS - SS Spray Gun

Part No.	Inlet
G250VS	3/8" NPT-F

- 3650 psi Rated Pressure
- 10.5 gpm Max Flow
- 320°F Max Temperature
- 1/4" NPT-F Outlet

Stainless Steel



RL51 - Compensating Gun

Part No.	Inlet
RL51	3/8" NPT-F
RL51ARS23	3/8" NPT-F - w/Coupler & SW

- 3650 psi Rated Pressure
- 13.2 gpm Max Flow
- 320°F Max Temperature
- 1/4" NPT-F Outlet



RL56 - Compensating Gun

Part No.	Inlet
RL56	3/8" NPT-F

- 5100 psi Rated Pressure
- 8.0 gpm Max Flow
- 320°F Max Temperature
- 1/4" NPT-F Outlet



RL57 - Spray Gun

Part No.	Inlet
RL57	3/8" NPT-F

- 7250 psi Rated Pressure
- 7.5 gpm Max Flow
- 320°F Max Temperature
- 1/4" NPT-F Outlet



RL34/RL82 - Foam Gun

Part No.	Inlet
RL34	1/2" BSP-F sw
RL82	1/2" BSP-F sw SS

- 1850 psi Rated Pressure
- 21 gpm Max Flow
- 320°F Max Temperature
- 1/2" BSP-F Outlet



RL60 - SS Spray Gun

Part No.	Inlet
RL60	1/2" BSP-F sw

- 870 psi Rated Pressure
- 16 gpm Max Flow
- 210°F Max Temperature
- 1/2" BSP-F Outlet

Stainless Steel



HIGH PRESSURE SPRAY GUNS

RL84 - Spray Gun

Part No.	Inlet
RL84	1/2" BSP-F

- 7250 psi Rated Pressure
- 21.0 gpm Max Flow
- 210°F Max Temperature
- 1/2" BSP-F Outlet
- Shoulder Rest 30506000P



RL124 - Spray Gun

Part No.	Inlet/Outlet
RL124	1/2" BSP-F

- 1750 psi Rated Pressure
- 32.0 gpm Max Flow
- 210°F Max Temperature
- Shoulder Rest 30506000P
- Extension Lance RB350E/OV- (Page 9)



RL204 - Spray Gun

Part No.	Inlet
RL204	3/4" BSP-F

- 2900 psi Rated Pressure
- 53.0 gpm Max Flow
- 210°F Max Temperature
- 1/2" BSP-F Outlet
- Shoulder Rest 30506000P
- Extension Lance RB350E/OV- (Page 9)



RL600 - SS Spray Gun

Part No.	Inlet
RL600	3/8" BSP-F
RL600E	3/8" BSP-F w/reed switch

- 8700 psi Rated Pressure
- 15.8 gpm Max Flow
- 210°F Max Temperature
- 3/8" BSP-F Outlet
- Shoulder Rest 30506000P



Stainless Steel

G85LN - Linear Gun

Part No.	Inlet
G85LN	3/8" NPT-F
G85LNSW	3/8" NPT-F sw

- 4500 psi Rated Pressure
- 10.5 gpm Max Flow
- 320°F Max Temperature
- 1/4" NPT-F Outlet



G170L - High Volume Linear Gun

Part No.	Inlet
G170L	1/2" NPT-F

- 2500 psi Rated Pressure
- 27 gpm Max Flow
- 195°F Max Temperature
- 1/2" NPT-F Outlet



G280L - High Volume Linear Gun

Part No.	Inlet
G280L	1/2" NPT-F

- 4050 psi Rated Pressure
- 32.0 gpm Max Flow
- 320°F Max Temperature
- 1/2" NPT-F Outlet



Foot Pedal

Part No.	Flow/Pressure
FP3000	8 gpm/3000 psi
FP5000	12 gpm/5000 psi

- 300°F Max Temperature
- 3/8" NPT-F Inlet
- 1/4" NPT-F Outlet
- Protective Coating



Variopress Pressure Variator

Part No.	Inlet
VARIOPRESS	1/4" BSP-F

- 3000 psi Rated Pressure
- 5.5 gpm Max Flow
- 176°F Max Temperature
- 1/4" BSP-F Outlet



Flow Regulator

Part No.	Inlet
FRI	1/4" BSP-M

- 3650 psi Rated Pressure
- 8.0 gpm Max Flow
- 320°F Max Temperature
- 1/4" BSP-F Outlet



WASHDOWN SPRAY GUNS

RB65 - Washdown Gun

Part No.	Inlet
RB65	1/2" BSP-F
RB65SW	1/2" BSP-F sw
RB65HF	1/2" BSP-F

- 350 psi Rated Pressure
- 16.0 gpm Max Flow - RB65/RB65SW
- 26.5 gpm Max Flow - RB65HF
- Adjustable Spray Pattern
- Brass



RB65SS - Washdown Gun

Part No.	Inlet
RB65SS	1/2" BSP-F

- 350 psi Rated Pressure
- 16.0 gpm Max Flow
- Adjustable Spray Pattern
- Stainless Steel



Stainless Steel

RB65EXTBL

Part No.	Inlet
RB65EXTBL	1/2" BSP-F

- 350 psi Rated Pressure
- 16.0 gpm Max Flow
- Includes 13.8" Extension



SW65 - Brass Swivel

Part No.	Inlet
SW65	1/2" BSP-M sw

- 350 psi Rated Pressure
- Up to 26.5 gpm Max Flow
- Swivel Option for RB65



RB35 - Washdown Gun

Part No.	Inlet
RB35	1/2" BSP-F sw

- 175 psi Rated Pressure
- 13.2 gpm Max Flow
- 120°F Max Temperature
Viton Seals - RB35-50
- 176°F Max Temperature
EPDM Seals - RB35-80
- Adjustable Spray Pattern



RB35OE/OV - On/Off Washdown Guns

Part No.	Inlet/Outlet
RB35OE/OV	1/2" BSP-F sw

- 175 psi Rated Pressure
- 13.2 gpm Max Flow
- 175°F Max Temperature
EPDM Seals - RB35OE
- 120°F Max Temperature
Viton Seals - RB35OV
- Extension Lance Available - See Below



RB35OE/OV - Extension Lances

Part No.	Length
99030001P	11.81"
99030002P	23.62"
99030003P	29.52"
99030004P	35.43"

- 175 psi Rated Pressure
- 13.2 gpm Max Flow
- 176°F Max Temperature
- Stainless Steel



GUN & LANCE ASSEMBLIES

Consumer Gun, Lance, Hose Assembly - Electric Use

Part No.	Hose Inlet/Outlet
GLHPKE	M22-F x M22-M

- 1900 psi Rated Pressure Spray Gun
- Chemical Bottle
- 20' High Pressure Hose
- 2 Lances - Vario and Roto



Consumer Gun, Lance, Hose Assembly - Gas Use

Part No.	Hose Inlet/Outlet
GLHPKG	M22-F x M22-M

- 2700 psi Rated Pressure Spray Gun
- 25' Hose
- Lance Length: 16"
- High-Low 3.5 Nozzle
- For Consumer Gas Pressure Washers



TURBOGUN Gun, Lance Assembly

Part No.	Inlet	Outlet
TURBOGUN	3/8" BSPF	1/4" BSPF
P11 - Gun Only	3/8" BSPF	1/4" BSPF

- 3000 psi Rated Pressure
- 10.5 gpm Max Flow
- 284°F Max Temperature
- Lance Length: 36"
- Gun Assembly for Turb021 & Formula100



RL300* Foaming Gun

Part No.	Inlet	Nozzle Size
RL3001.8	3/8" BSPF SW	1.8-2.6 gpm
RL3002.1	3/8" BSPF SW	2.1-6.5 gpm

*Soap Injector Not Included

- 2900 psi Rated Pressure
- 6.5 gpm Max Flow
- 100°F Max Temperature
- Dual Lance with LS12 Foamer Nozzle Protector



PA Gun, Lance, QC Assembly

Part No.	Inlet	Outlet
GLQC4000PKG	3/8" NPT-F	QC

- 4000 psi Rated Pressure
- 10.5 gpm Max Flow
- 320°F Max Temperature
- Lance Length: 36" with QC



Economical Gun, Lance, QC Assembly

Part No.	Inlet	Outlet
GLQC5000	3/8" NPT-F	QC

- 5000 psi Rated Pressure
- 10 gpm Max Flow
- 320°F Max Temperature
- Lance Length: 39" with QC



Compensating Gun, Lance Assembly

Part No.	Inlet	Outlet
RL56S31200	3/8" NPT-F	1/4" NPT-F

- 5100 psi Rated Pressure
- 8 gpm Max Flow
- 320°F Max Temperature
- Lance Length: 47"



Weep Gun Assembly

Part No.	Inlet	Outlet
30076700P	3/8" BSP-F SW	1/4" NPT-F
30076806P	3/8" BSP-F SW	1/4" NPT-F

- 3650 psi Rated Pressure
- 8 gpm Max Flow
- 320°F Max Temperature
- Lance Length:
27.5" - 30076700P
35.4" - 30076806P



GUN & LANCE ASSEMBLIES

PA Industrial Gun, Lance, Nozzle Assembly

Part No.	Inlet	Nozzle Size
30018015P	3/8" BSP-F	1.5 mm

- 2600 psi Rated Pressure
- 8 gpm Max Flow
- 140°F Max Temperature
- Total Length: 30.22"



PA Industrial Gun, Lance, Nozzle Assembly - with Swivel

Part No.	Inlet	Nozzle Size
30158015P	3/8" BSP-F SW	1.5 mm

- 2600 psi Rated Pressure
- 8 gpm Max Flow
- 140°F Max Temperature
- Total Length: 31.55"



PA High Volume Industrial Gun, Lance, Nozzle Assembly

Part No.	Inlet	Nozzle Size
30538045P	1/2" BSP-F	4.5 mm

- 1750 psi Rated Pressure
- 32 gpm Max Flow
- 140°F Max Temperature
- Total Length: 28"



Hypro High Volume Gun, Lance, Nozzle Assembly

Part No.	Inlet	Nozzle Size
AG33810010	1/2" NPT-M	3 mm-25 gpm
AG33810011	1/2" NPT-M	4 mm-30 gpm

- 1200 psi Rated Pressure
- 30 gpm Max Flow
- Lance Length:
17" - AG33810010
21" - AG33810011



Hypro Low Pressure-High Volume Gun, Lance, Nozzle Assembly

Part No.	Inlet	Nozzle Size
AG33810013	1/2" NPT-M	3 mm

- 700 psi Rated Pressure
- 19 gpm Max Flow
- Lance Length: 7"



Hypro Low Pressure Gun, Lance, Nozzle Assembly

Part No.	Inlet	Nozzle Size
AG33810043	3/8" & 1/2" HB	2.3 mm
AG33810043L	3/8" & 1/2" HB	2.3 mm

- 600 psi Rated Pressure
- 4.5 gpm Max Flow
- Lance Length:
7.25" - AG33810043
18" - AG33810043L



Water Broom

Part No.	Inlet	Outlet
WB12	1/4" NPT-F	1/4" NPT-F
WB16	1/4" NPT-F	1/4" NPT-F
GP2100306	1/4" NPT-F	1/4" NPT-F

- 3000 psi Rated Pressure
- Delux 4500 psi - GP21003016
- Length:
12" - WB12
16" - WB16
14" Adjustable - GP2100306



SINGLE LANCES

Economical Lances

Part No.	Length	Grip
L18ICP	18"	Round
L24ICP	24"	Round
L1	36"	Round
L2	48"	Round



- 4000 psi Rated Pressure
- Round Molded Grip
- 1/4" NPT-M Inlet/Outlet
- Zinc-Plated

Economical Two Section Lances

Part No.	Length	Grip
L7	36"	Round
L11	48"	Round



- 4000 psi Rated Pressure
- Round Molded Grip
- 1/4" NPT-M Inlet/Outlet
- Zinc-Plated

Economical Stainless Steel Lances

Part No.	Length	Grip
L5	24"	Round
L6	48"	Rectangular
L12	48"	Round-2 Sections



Stainless Steel

- 4000 psi Rated Pressure
- Stainless Steel Lances
- 1/4" NPT-M Inlet/Outlet

PA Insulated Lances

Part No.	Length	Grip
L50	19.7"	Round
L70	27.5"	Round
L90	35.4"	Round
L120	42.7"	Round



- 3650 psi Rated Pressure
- 10.5 gpm Max Flow
- 320°F Max Temperature
- 1/4" NPT-M Inlet
- 1/4" NPT-F Outlet
- Zinc-Plated

PA Stainless Steel Lances

Part No.	Length	Grip
L50S*	17.7"	Vented
L800SS	31"	Vented
L1050SS	41"	Vented
L1200SS	47"	Vented



Stainless Steel

- 5100 psi Rated Pressure
- 8.0 gpm Max Flow
- 320°F Max Temperature
- 1/4" NPT-M Inlet
- 1/4" NPT-F Outlet
- Stainless Steel Lances

* L50S is rated 10.5 gpm Flow @ 3650 psi Pressure

Interpump Vented Lances

Part No.	Length	Grip
Z7	27"	Rectangular
Z9	35"	Rectangular
Z12	47"	Rectangular
Z15	59"	Rectangular
Z17	67"	Rectangular
Z20	79"	Rectangular



- 3000 psi Rated Pressure
- 10.56 gpm Max Flow
- 284°F Max Temperature
- 1/4" BSP-M Inlet
- 1/4" BSP-F Outlet
- Zinc-Plated

PA Vented Grip Lances

Part No.	Length	Grip
40053500P	500 mm	Vented
40075500P	700 mm	Vented
40095500P	900 mm	Vented
40125500P	1200 mm	Vented
40155500P	1500 mm	Vented
40205500P	1700 mm	Vented
40175500P	2000 mm	Vented



- 3650 psi Rated Pressure
- 10.5 gpm Max Flow
- 320°F Max Temperature
- 1/4" NPT-M Inlet
- 1/4" NPT-F Outlet
- Zinc-Plated

Single Lance Universal Side Handle

Part No.	Description
SH	Fits All 1/4" Single Lance Tubes



SINGLE & TELESCOPIC LANCES

PA Stainless Steel Lance Tubes

Part No.	Length	Grip
40901456P	15.7"	None
40801256P	31.4"	None
40002456P	40"	None
40002356P	72"	None




Stainless Steel

- 3650 psi Rated Pressure
- 4050 psi Permissible Pressure
- 10.5 USgpm Rated Flow
- 1/4" NPT-M Inlet
- Stainless Steel

Extension Lance for RL124

Part No.	Length	Grip
30400040P	16"	Side Handle
30400080P	32"	Side Handle

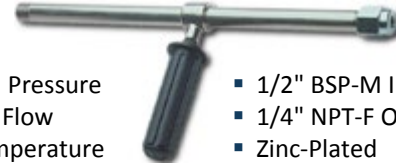

- 1750 psi Rated Pressure
- 26.5 gpm Max Flow
- 230°F Max Temperature
- 1/2" BSP-M Inlet
- 1/4" NPT-F Outlet
- Zinc-Plated

Extension Lance for RL84 & RL204

Part No.	Length	Grip
30500040P	16"	Side Handle
30500080P	32"	Side Handle
30500092P	50"	Side Handle



Stainless Steel

- 7250 psi Rated Pressure
- 53 gpm Max Flow
- 230°F Max Temperature
- 1/2" BSP-M Inlet
- 1/4" NPT-F Outlet
- Stainless Steel

Flexible Wands

Part No.	Inlet/Outlet	Colour
DL18FWBK	1/4" NPT-M/1/8" NPT-F	Black
DL18FWBKM	1/4" NPT-M/1/4" NPT-F	Black
DL18FWBLM	1/4" NPT-M/1/4" NPT-F	Blue
DL18FWRDM	1/4" NPT-M/1/4" NPT-F	Red



- 2250 psi Rated Pressure
- 200°F Max Temperature
- Galvanized Pipe, Molded Grip
- 18" Long
- 180° Flexing Action

Pistol Grip & Extension

Part No.	Length	Inlet/Outlet
357R03F02F	Pistol Grip	3/8" NPT-F/1/4" NPT-F
35118R03F02M	18"	3/8" NPT-F/1/4" NPT-M



- 2000 psi Rated Pressure
- Includes 18" Extension
- 3/8" NPT-F Inlet
- 1/4" NPT-M Outlet

Adjustable Angle Lance

Part No.	Length	Grip
ST85	33"	Vented



- 3500 psi Rated Pressure
- 8.0 gpm Max Flow
- 300°F Max Temperature
- 1/4" QC outlet
- Push/Pull Action up to 90° Angle

Telescopic Wand

Part No.	Length	Part No.	Description
DLTG12	6 - 12'	D20015	Wand Belt
DLTG18	6 - 18'	D20011	Gutter Cleaner
DLTG24	6 - 24'		



- 3500 psi Rated Pressure
- 10.5 gpm Max Flow
- 195°F Max Temperature
- 1/4" QC outlet
- Gun Included

Heavy Duty Telescopic Wand with Wand Belt

Part No.	Length	Grip
DLTG24A	6 - 24'	N/A



- 4000 psi Rated Pressure
- 10.5 gpm Max Flow
- 230°F Max Temperature
- 1/4" QC Outlet
- Aluminum 3 Section Pole
- 3/8" Double Braid Hose

DUAL LANCES

PA Dual Lance

Part No.	Length	Grips
LL1090	43"	Vented

- 3650 psi Rated Pressure
- 10.5 gpm Max Flow
- 320°F Max Temperature
- 1/4" NPT-M Inlet
- 1/4" NPT-F Outlet
- Zinc Plated, Insulated Molded Grip



PA Stainless Steel Dual Lance

Part No.	Length	Grips
LL1090SS	43"	Vented

- 3650 psi Rated Pressure
- 10.5 gpm Max Flow
- 320°F Max Temperature
- 1/4" NPT-M Inlet
- 1/4" NPT-F Outlet
- Insulated Molded Grip



Stainless Steel

PA Dual Lance with Vertical Knob

Part No.	Length	Grips
LL890	35"	Vented
LL1090V	43"	Vented

- 3650 psi Rated Pressure
- 10.5 gpm Max Flow
- 320°F Max Temperature
- 1/4" NPT-M Inlet
- 1/4" NPT-F Outlet
- Zinc Plated



PA Stainless Steel Dual Lance with Vertical Knob

Part No.	Length	Grips
LL890SS	35"	Vented
LL1090VSS	43"	Vented

- 3650 psi Rated Pressure
- 10.5 gpm Max Flow
- 320°F Max Temperature
- 1/4" NPT-M Inlet
- 1/4" NPT-F Outlet



Stainless Steel

Interpump Dual Lance

Part No.	Length	Grips
ZZ10	35"	Insulated
ZZ18	74"	Insulated

- 3000 psi Rated Pressure
- 10.56 gpm Max Flow
- 284°F Max Temperature
- 1/4" BSP-M Inlet
- 1/4" BSP-F Outlet
- Zinc Plated, Insulated Molded Grip

