

**CHANNEL LOCK**

CHANNEL LOCK  
420 MADE IN U.S.A.

**TONGUE  
AND GROOVE**

# TONGUE AND GROOVE

CHANNELLOCK® uses high carbon C1080 steel for superior performance on the job, and an ultimate rust preventative coating.

PermaLock® fastener eliminates nut and bolt failure.



Right angle, laser heat-treated teeth grip better and last longer.



Patented reinforcing edge minimizes stress breakage.

Undercut tongue and groove won't slip.


CHANNELLOCK BLUE® comfort grips

## STRAIGHT JAW


**BigAzz**

**Features**

- Big as the job. Big as you need.




PLIER	A OVERALL LENGTH		B JAW LENGTH		C JOINT THICKNESS		H HANDLE SPAN		WEIGHT		NUMBER OF ADJUSTMENTS	JAW CAPACITY	
	in	mm	in	mm	in	mm	in	mm	pounds	grams		in	mm
480	20.25	514.35	3.00	76.20	0.59	14.99	3.31	84.07	3.81	1728.19	12	5.50	139.70




PLIER	A OVERALL LENGTH		B JAW LENGTH		C JOINT THICKNESS		H HANDLE SPAN		WEIGHT		NUMBER OF ADJUSTMENTS	JAW CAPACITY	
	in	mm	in	mm	in	mm	in	mm	pounds	grams		in	mm
460	16.50	419.10	2.56	65.02	0.59	14.99	1.93	49.02	3.14	1424.28	8	4.25	107.95
440®	12.00	304.80	1.50	38.10	0.50	12.70	1.81	45.97	1.64	743.89	7	2.25	57.15
430®	10.00	254.00	1.38	35.05	0.44	11.18	2.13	54.10	1.18	535.24	7	2.00	50.80
420®	9.50	241.30	1.12	28.45	0.47	11.94	1.57	39.88	0.87	394.63	5	1.50	38.10
426	6.50	165.10	0.81	20.57	0.47	11.94	1.69	42.93	0.37	167.83	5	0.87	22.10

**Features**

- Patented SAFE-T-STOP™ feature prevents finger pinch.
- Lower jaw combines with expanded reinforcing rib to prevent handles from contacting each other.



PLIER	A OVERALL LENGTH		B JAW LENGTH		C JOINT THICKNESS		H HANDLE SPAN		WEIGHT		NUMBER OF ADJUSTMENTS	JAW CAPACITY	
	in	mm	in	mm	in	mm	in	mm	pounds	grams		in	mm
421	9.50	241.30	1.12	28.45	0.47	11.94	1.57	39.88	0.82	371.95	5	1.50	38.10
428	8.00	203.20	1.12	28.45	0.40	10.16	1.57	39.88	0.79	358.34	4	1.50	38.10




PLIER	A OVERALL LENGTH		B JAW LENGTH		C JOINT THICKNESS		H HANDLE SPAN		WEIGHT		NUMBER OF ADJUSTMENTS	JAW CAPACITY	
	in	mm	in	mm	in	mm	in	mm	pounds	grams		in	mm
424	4.50	114.30	0.33	8.38	0.13	3.30	1.26	32.00	0.12	54.43	3	0.50	12.70

# TONGUE AND GROOVE

## SMOOTH JAW


### Features

- Smooth jaws for non-marring surfaces (PVC pipe, chromes, etc.)

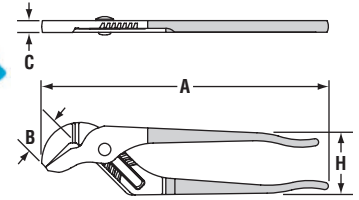


PLIER	A OVERALL LENGTH		B JAW LENGTH		C JOINT THICKNESS		H HANDLE SPAN		WEIGHT		NUMBER OF ADJUSTMENTS	JAW CAPACITY	
	in	mm	in	mm	in	mm	in	mm	pounds	grams		in	mm
415	10.00	254.00	1.38	35.05	0.44	11.18	2.13	54.10	0.98	444.52	7	2.00	50.80

## V-JAW





### Features

- V-Jaws give you more points of contact on round stock and tubing.

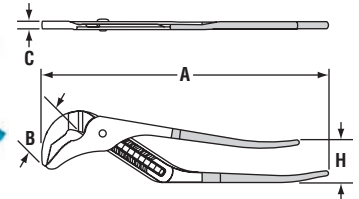

PLIER	A OVERALL LENGTH		B JAW LENGTH		C JOINT THICKNESS		H HANDLE SPAN		WEIGHT		NUMBER OF ADJUSTMENTS	JAW CAPACITY	
	in	mm	in	mm	in	mm	in	mm	pounds	grams		in	mm
483	20.25	514.35	3.19	81.03	0.54	13.72	2.94	74.68	3.74	1696.44	12	5.50	139.70
463	16.50	419.10	1.08	27.43	0.48	12.19	1.93	49.02	2.71	1229.23	8	4.25	107.95

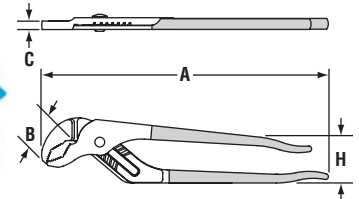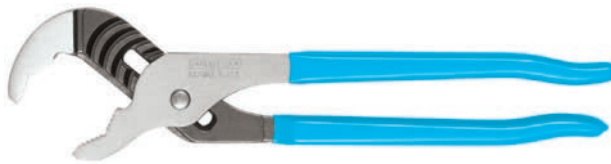


PLIER	A OVERALL LENGTH		B JAW LENGTH		C JOINT THICKNESS		H HANDLE SPAN		WEIGHT		NUMBER OF ADJUSTMENTS	JAW CAPACITY	
	in	mm	in	mm	in	mm	in	mm	pounds	grams		in	mm
442	12.00	304.80	1.50	38.10	0.50	12.70	1.69	42.93	1.78	807.39	7	2.25	57.15
432	10.00	254.00	1.37	34.80	0.43	10.92	2.20	55.88	0.95	430.91	7	2.00	50.80
422	9.50	241.30	1.12	28.45	0.47	11.94	1.57	39.88	0.84	381.02	5	1.50	38.10
412	6.50	165.10	0.81	20.57	0.47	11.94	1.69	42.93	0.34	154.00	5	0.94	23.88

## NARROW NOSE

### Features

- Air brake tool
- Easy brake clearance check for automatic or manual slack adjusters

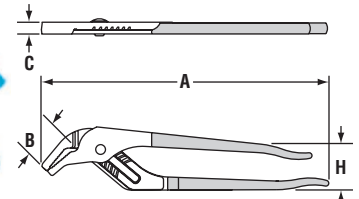

PLIER	A OVERALL LENGTH		B JAW LENGTH		C JOINT THICKNESS		H HANDLE SPAN		WEIGHT		NUMBER OF ADJUSTMENTS	JAW CAPACITY	
	in	mm	in	mm	in	mm	in	mm	pounds	grams		in	mm
444	12.00	304.80	1.50	38.10	0.34	8.64	1.81	45.97	1.64	743.89	7	2.25	57.15

U.S. Patent No. 7,743,686




# TONGUE AND GROOVE

## NUTBUSTER®

### Features


- Battery terminal plier
- Parrot nose ideal for round surfaces
- Greater jaw capacity with slip joint Permalock® fastener

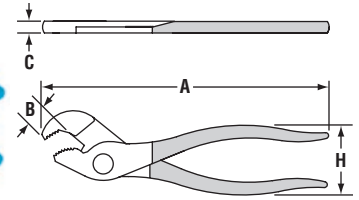

PLIER	A OVERALL LENGTH		B JAW LENGTH		C JOINT THICKNESS		H HANDLE SPAN		WEIGHT		NUMBER OF ADJUSTMENTS	JAW CAPACITY	
	in	mm	in	mm	in	mm	in	mm	pounds	grams		in	mm
307	7.00	177.80	0.45	11.43	0.28	7.11	1.89	48.01	0.41	185.97	2	0.63	16.00

### Features

- Parrot nose ideal for round surfaces

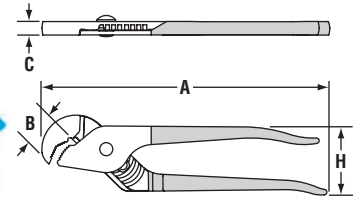


PLIER	A OVERALL LENGTH		B JAW LENGTH		C JOINT THICKNESS		H HANDLE SPAN		WEIGHT		NUMBER OF ADJUSTMENTS	JAW CAPACITY	
	in	mm	in	mm	in	mm	in	mm	pounds	grams		in	mm
410	9.50	241.30	1.12	28.45	0.44	11.18	2.17	55.12	1.41	639.57	4	1.12	28.45
414	13.50	342.90	1.63	41.40	0.50	12.70	2.20	55.88	2.41	1093.16	6	2.00	50.80

## GRIPLOCK®


### Features

- Laser heat-treated teeth grip better and last longer.
- Ergonomically designed offset head for greater leverage.
- Special jaw design accommodates many shapes.

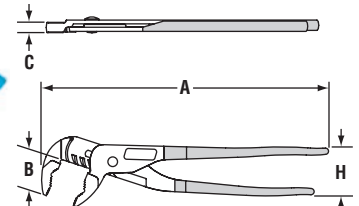

PLIER	A OVERALL LENGTH		B JAW LENGTH		C JOINT THICKNESS		H HANDLE SPAN		WEIGHT		NUMBER OF ADJUSTMENTS	JAW CAPACITY	
	in	mm	in	mm	in	mm	in	mm	pounds	grams		in	mm
GL6	6.50	165.10	1.00	25.40	0.25	6.35	2.01	51.05	0.35	158.76	5	1.06	26.92
GL10	9.50	241.30	1.34	34.04	0.36	9.14	2.17	55.12	0.78	353.80	5	1.25	31.75
GL12	12.50	317.50	1.77	44.96	0.48	12.19	2.52	64.01	1.60	725.75	6	2.25	57.15

## OIL FILTER/PVC PLIER

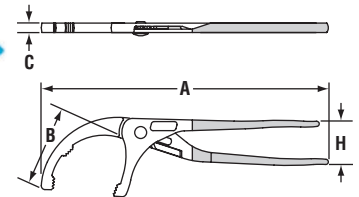

PLIER	A OVERALL LENGTH		B JAW LENGTH		C JOINT THICKNESS		H HANDLE SPAN		WEIGHT		NUMBER OF ADJUSTMENTS	JAW CAPACITY			
	in	mm	in	mm	in	mm	in	mm	pounds	grams		MIN. in	MIN. mm	MAX. in	MAX. mm
209	9.00	228.60	1.75	44.45	0.43	10.92	1.61	40.89	0.51	231.33	4	1.75	44.45	3.00	76.20
212	12.00	304.80	2.52	64.01	0.39	9.91	1.77	45.96	1.11	503.49	5	2.50	63.50	3.75	95.25
215	15.50	393.70	3.50	88.90	0.51	12.95	1.77	45.96	2.08	943.47	6	2.50	63.50	4.50	114.30


**CHANNEL LOCK**



# CUTTING PLIERS

# CUTTING PLIERS

**NOT ALL CUTTING EDGES ARE THE SAME...**




Laser heat-treated cutting edges last longer.

Only CHANNELLOCK® uses precision machined knife and anvil style cutting edges to ensure perfect mating and superior cutting edge life.

## TYPES OF CUTTING EDGES



VS.



Most manufacturers use two sharp edges which can become misaligned, losing their cutting effectiveness.

Channellock's knife and anvil cutters ensure proper cutting edge alignment, resulting in a clean cut every time.

CHANNELLOCK BLUE® grips for comfort


CHANNELLOCK® uses high carbon steel for superior performance on the job, and an ultimate rust preventative coating.

PLIER	SUGGESTED WIRE CUTTING CAPACITIES (by Diameter)													
	PIANO WIRE				HARD WIRE				MEDIUM HARD WIRE				SOFT WIRE	
	MIN. DIA.		MAX. DIA.		MIN. DIA.		MAX. DIA.		MIN. DIA.		MAX. DIA.		MAX. DIA.	
	in	mm	in	mm	in	mm	in	mm	in	mm	in	mm	in	mm
3047	0.070	1.778	0.091	2.311	0.047	1.194	0.091	2.311	0.047	1.194	0.091	2.311	0.162	4.115
3048	0.070	1.778	0.091	2.311	0.047	1.194	0.091	2.311	0.047	1.194	0.091	2.311	0.162	4.115
317	0.070	1.778	0.091	2.311	0.047	1.194	0.091	2.311	0.047	1.194	0.091	2.311	0.162	4.115
318	0.063	1.600	0.091	2.311	0.047	1.194	0.091	2.311	0.047	1.194	0.091	2.311	0.162	4.115
326	0.080	2.032	0.080	2.032	0.047	1.194	0.091	2.311	0.047	1.194	0.091	2.311	0.162	4.115
337	0.063	1.600	0.091	2.311	0.047	1.194	0.091	2.311	0.047	1.194	0.091	2.311	0.162	4.115
338	0.063	1.600	0.091	2.311	0.047	1.194	0.091	2.311	0.047	1.194	0.091	2.311	0.162	4.115
347	0.070	1.778	0.091	2.311	0.047	1.194	0.091	2.311	0.047	1.194	0.091	2.311	0.162	4.115
348	0.070	1.778	0.091	2.311	0.047	1.194	0.091	2.311	0.047	1.194	0.091	2.311	0.162	4.115
349	0.047	1.194	0.091	2.311	0.047	1.194	0.091	2.311	0.047	1.194	0.091	2.311	0.162	4.115
350S	0.047	1.194	0.091	2.311	0.047	1.194	0.091	2.311	0.047	1.194	0.091	2.311	0.162	4.115
351S	0.047	1.194	0.091	2.311	0.047	1.194	0.091	2.311	0.047	1.194	0.091	2.311	0.162	4.115
356	0.056	1.422	0.091	2.311	0.047	1.194	0.091	2.311	0.047	1.194	0.091	2.311	0.162	4.115
357	0.056	1.422	0.091	2.311	0.047	1.194	0.091	2.311	0.047	1.194	0.091	2.311	0.162	4.115
358	0.056	1.422	0.091	2.311	0.047	1.194	0.091	2.311	0.047	1.194	0.091	2.311	0.162	4.115
360	0.070	1.778	0.091	2.311	0.047	1.194	0.091	2.311	0.047	1.194	0.091	2.311	0.162	4.115
3610	0.047	1.194	0.091	2.311	0.047	1.194	0.091	2.311	0.047	1.194	0.091	2.311	0.162	4.115
367	0.070	1.778	0.091	2.311	0.047	1.194	0.091	2.311	0.047	1.194	0.091	2.311	0.162	4.115
368	0.070	1.778	0.091	2.311	0.047	1.194	0.091	2.311	0.047	1.194	0.091	2.311	0.162	4.115
369	0.047	1.194	0.091	2.311	0.047	1.194	0.091	2.311	0.047	1.194	0.091	2.311	0.162	4.115
435	0.063	1.600	0.080	2.032	0.047	1.194	0.091	2.311	0.047	1.194	0.091	2.311	0.162	4.115
436	0.056	1.422	0.091	2.311	0.047	1.194	0.091	2.311	0.047	1.194	0.091	2.311	0.162	4.115
437	0.056	1.422	0.091	2.311	0.047	1.194	0.091	2.311	0.047	1.194	0.091	2.311	0.162	4.115
447	0.056	1.422	0.091	2.311	0.047	1.194	0.091	2.311	0.047	1.194	0.091	2.311	0.162	4.115
449	0.056	1.422	0.091	2.311	0.047	1.194	0.091	2.311	0.047	1.194	0.091	2.311	0.162	4.115
728	0.063	1.600	0.080	2.032	0.047	1.194	0.091	2.311	0.047	1.194	0.091	2.311	0.162	4.115
748	*	*	*	*	*	*	*	*	*	*	0.034 <sup>1</sup>	0.864	0.080	2.032
758	*	*	*	*	*	*	*	*	*	*	0.034 <sup>2</sup>	0.864	0.080	2.032
86	0.070	1.778	0.091	2.311	0.047	1.194	0.091	2.311	0.047	1.194	0.091	2.311	0.162	4.115
88	0.047	1.194	0.091	2.311	0.047	1.194	0.091	2.311	0.047	1.194	0.091	2.311	0.162	4.115
E318	0.063	1.600	0.091	2.311	0.047	1.194	0.091	2.311	0.047	1.194	0.091	2.311	0.162	4.115
E326	0.056	1.422	0.080	2.032	0.047	1.194	0.091	2.311	0.047	1.194	0.091	2.311	0.162	4.115
E336	0.056	1.422	0.091	2.311	0.047	1.194	0.091	2.311	0.047	1.194	0.091	2.311	0.162	4.115
E337	0.063	1.600	0.091	2.311	0.047	1.194	0.091	2.311	0.047	1.194	0.091	2.311	0.162	4.115
E338	0.063	1.600	0.091	2.311	0.047	1.194	0.091	2.311	0.047	1.194	0.091	2.311	0.162	4.115
E346	0.070	1.778	0.091	2.311	0.047	1.194	0.091	2.311	0.047	1.194	0.091	2.311	0.162	4.115
E347	0.070	1.778	0.091	2.311	0.047	1.194	0.091	2.311	0.047	1.194	0.091	2.311	0.162	4.115
E348	0.070	1.778	0.091	2.311	0.047	1.194	0.091	2.311	0.047	1.194	0.091	2.311	0.162	4.115
E388	0.063	1.600	0.091	2.311	0.047	1.194	0.091	2.311	0.047	1.194	0.091	2.311	0.162	4.115
Following pliers recommended for hard, medium hard, and copper applications only.														
35-220	*	*	*	*	0.047	1.194	0.070	1.778	0.047	1.194	0.091	2.311	0.162	4.115
35-250	*	*	*	*	0.047	1.194	0.070	1.778	0.047	1.194	0.091	2.311	0.162	4.115
35-280	*	*	*	*	0.047	1.194	0.070	1.778	0.047	1.194	0.091	2.311	0.162	4.115
35-300	*	*	*	*	0.047	1.194	0.070	1.778	0.047	1.194	0.091	2.311	0.162	4.115
Following pliers recommended for medium hard, and copper applications only.														
148-10	*	*	*	*	*	*	*	*	0.047	1.194	0.091	2.311	0.162	4.115
148-14	*	*	*	*	*	*	*	*	0.047	1.194	0.091	2.311	0.162	4.115
Following pliers recommended for copper and aluminum only.														
87	*	*	*	*	*	*	*	*	0.047	1.194	0.080	2.032	2/0	9.266
89	*	*	*	*	*	*	*	*	0.047	1.194	0.080	2.032	2/0	9.266
911	*	*	*	*	*	*	*	*	0.047	1.194	0.080	2.032	2/0	9.266

\* = Product not recommended for cutting this type of wire.

WIRE CLASSIFICATIONS	TENSILE STRENGTH	
	K PSI	N/mm <sup>2</sup>
PIANO WIRE - Hardened steel spring wire	280 - 360	1930 - 2500
HARD WIRE - Tempered steel spring wire	240 - 275	1650 - 1900
MEDIUM HARD WIRE - Tempered steel spring wire	180 - 235	1240 - 1620
SOFT WIRE (Type 1) - Tempered steel spring wire	120 max.	825 max.
SOFT WIRE (Type 2) - Tempered steel spring wire	70 - 90	480 - 620
COPPER WIRE	30 max.	200 max.


# CUTTING PLIERS

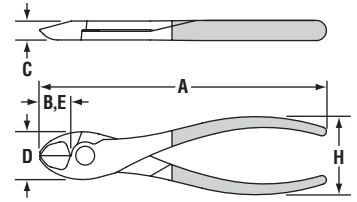

## Features

- High leverage
- Lap joint diagonal



PLIER	A OVERALL LENGTH		B JAW LENGTH		C JOINT THICKNESS		D JOINT WIDTH		E CUTTING EDGE		H HANDLE SPAN		WEIGHT	
	in	mm	in	mm	in	mm	in	mm	in	mm	in	mm	pounds	grams
337	7.00	177.80	0.79	20.07	0.43	10.92	1.18	29.97	0.79	20.07	1.89	48.01	0.57	258.55

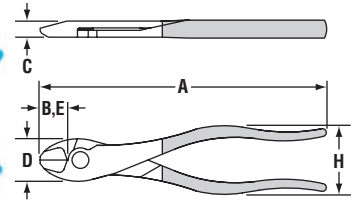

## Features

- High leverage
- Lap joint diagonal


PLIER	A OVERALL LENGTH		B JAW LENGTH		C JOINT THICKNESS		D JOINT WIDTH		E CUTTING EDGE		H HANDLE SPAN		WEIGHT	
	in	mm	in	mm	in	mm	in	mm	in	mm	in	mm	pounds	grams
338	8.00	203.20	0.79	20.07	0.43	10.92	1.18	29.97	0.79	20.07	1.89	48.01	0.66	299.37

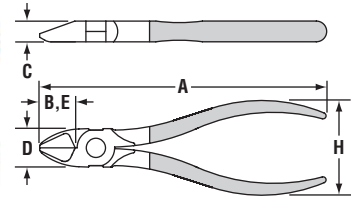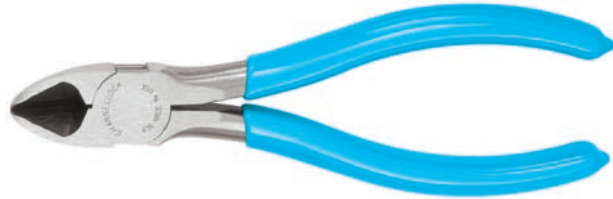

## Features

- Diagonal cutter

PLIER	A OVERALL LENGTH		B JAW LENGTH		C JOINT THICKNESS		D JOINT WIDTH		E CUTTING EDGE		H HANDLE SPAN		WEIGHT	
	in	mm	in	mm	in	mm	in	mm	in	mm	in	mm	pounds	grams
435	5.00	127.00	0.87	22.10	0.43	10.92	0.69	17.53	0.87	22.10	1.89	48.01	0.28	127.01
436	6.00	152.40	0.85	21.59	0.43	10.92	0.81	20.57	0.85	21.59	1.89	48.01	0.42	190.51

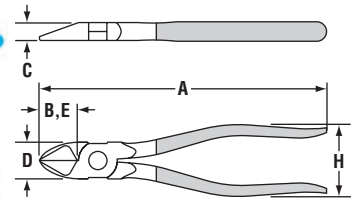

## Features

- Diagonal cutter

PLIER	A OVERALL LENGTH		B JAW LENGTH		C JOINT THICKNESS		D JOINT WIDTH		E CUTTING EDGE		H HANDLE SPAN		WEIGHT	
	in	mm	in	mm	in	mm	in	mm	in	mm	in	mm	pounds	grams
437	7.00	177.80	1.00	25.40	0.49	12.45	0.94	23.88	1.00	25.40	1.89	48.01	0.52	235.87

# CUTTING PLIERS

## Features

- High leverage
- Curved diagonal



PLIER	A OVERALL LENGTH		B JAW LENGTH		C JOINT THICKNESS		D JOINT WIDTH		E CUTTING EDGE		H HANDLE SPAN		WEIGHT	
	in	mm	in	mm	in	mm	in	mm	in	mm	in	mm	pounds	grams
447	7.75	196.85	1.02	25.91	0.49	12.45	1.06	26.92	1.02	25.91	1.89	48.01	0.72	326.59
449	9.54	242.32	1.02	25.91	0.50	12.70	1.12	28.45	1.02	25.91	2.01	51.05	0.86	390.09

## Features

- End cutting plier



PLIER	A OVERALL LENGTH		B JAW LENGTH		C JOINT THICKNESS		D JOINT WIDTH		E CUTTING EDGE		H HANDLE SPAN		WEIGHT	
	in	mm	in	mm	in	mm	in	mm	in	mm	in	mm	pounds	grams
356	6.25	158.75	0.35	8.89	0.47	11.94	1.38	35.05	1.06	26.92	1.89	48.01	0.57	258.55
357	7.50	190.50	0.35	8.89	0.49	12.45	1.63	41.40	1.18	29.97	1.89	48.01	0.76	344.73
358	8.00	203.20	0.35	8.89	0.49	12.45	1.63	41.40	1.18	29.97	1.89	48.01	0.79	358.34

## Features


- Heavy duty construction
- Ideal for cutting large nails



PLIER	A OVERALL LENGTH		B JAW LENGTH		C JOINT THICKNESS		D JOINT WIDTH		E CUTTING EDGE		H HANDLE SPAN		WEIGHT	
	in	mm	in	mm	in	mm	in	mm	in	mm	in	mm	pounds	grams
148-10	10.00	254.00	0.62	15.75	0.87	22.10	2.19	55.63	0.87	22.10	2.05	52.07	1.25	566.99
148-14	13.75	349.25	0.79	20.07	0.98	24.89	2.56	65.02	0.98	24.89	2.44	61.98	2.48	1124.91

## Features

- Cable cutter
- Cuts up to 4/0 aluminum and 2/0 copper
- Not for steel or ACSR

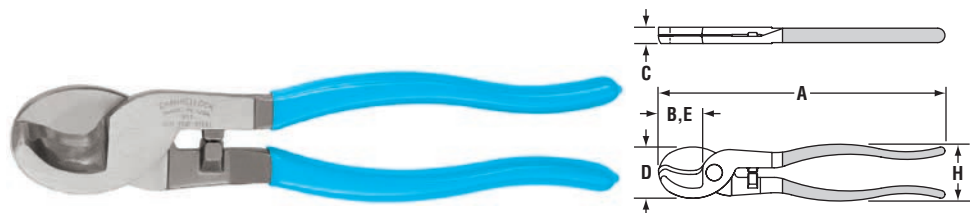

PLIER	A OVERALL LENGTH		B JAW LENGTH		C JOINT THICKNESS		D JOINT WIDTH		E CUTTING EDGE		H HANDLE SPAN		WEIGHT	
	in	mm	in	mm	in	mm	in	mm	in	mm	in	mm	pounds	grams
911	9.50	241.30	1.40	35.56	0.51	12.95	1.61	40.89	1.40	35.56	1.89	48.01	0.90	408.23



**CHANNEL LOCK**



MADE IN

# CONCRETOR'S NIPPERS

# CONCRETOR'S NIPPERS


Laser heat-treated cutting edges last longer.

High carbon C1080 steel for superior performance and an ultimate rust preventative coating.



Only CHANNELLOCK® uses precision machined knife and anvil style cutting edges to ensure perfect mating and superior cutting edge life.


CHANNELLOCK BLUE® grips for comfort

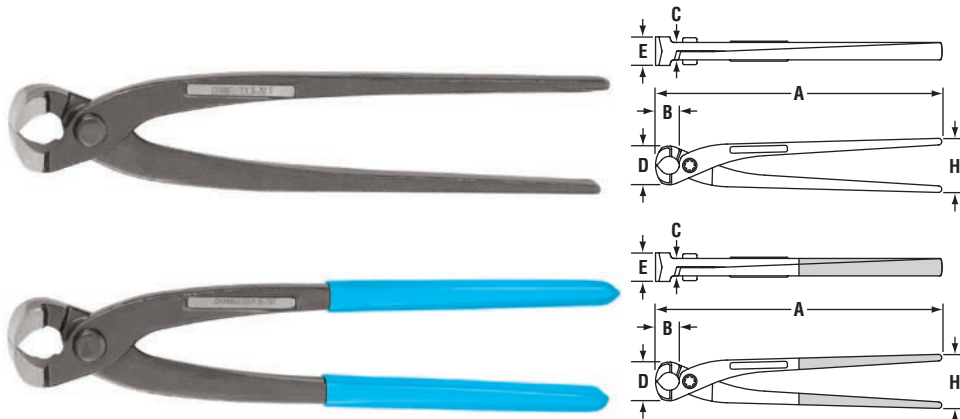

PLIER	A OVERALL LENGTH		B JAW LENGTH		C JOINT THICKNESS		D JOINT WIDTH		E CUTTING EDGE		H HANDLE SPAN		WEIGHT	
	in	mm	in	mm	in	mm	in	mm	in	mm	in	mm	pounds	grams
35-220P	9.00	228.60	0.69	17.53	0.91	23.11	1.18	29.97	1.18	29.97	1.73	43.94	0.81	367.41
35-220	9.00	228.60	0.69	17.53	0.91	23.11	1.18	29.97	1.18	29.97	1.73	43.94	0.82	371.95
35-250P	10.00	254.00	0.83	21.08	1.06	26.92	1.38	35.05	1.38	35.05	2.01	51.05	1.02	462.66
35-250	10.00	254.00	0.83	21.08	1.06	26.92	1.38	35.05	1.38	35.05	2.01	51.05	1.04	471.74
35-280P	11.00	279.40	0.83	21.08	1.06	26.92	1.38	35.05	1.38	35.05	2.01	51.05	1.22	553.38
35-280	11.00	279.40	0.83	21.08	1.06	26.92	1.38	35.05	1.38	35.05	2.01	51.05	1.23	557.92
35-300P	12.00	304.80	0.83	21.08	1.06	26.92	1.38	35.05	1.38	35.05	2.01	51.05	1.31	594.21
35-300	12.00	304.80	0.83	21.08	1.06	26.92	1.38	35.05	1.38	35.05	2.01	51.05	1.33	603.28

"P" indicates no grips.

**CHANNEL LOCK**

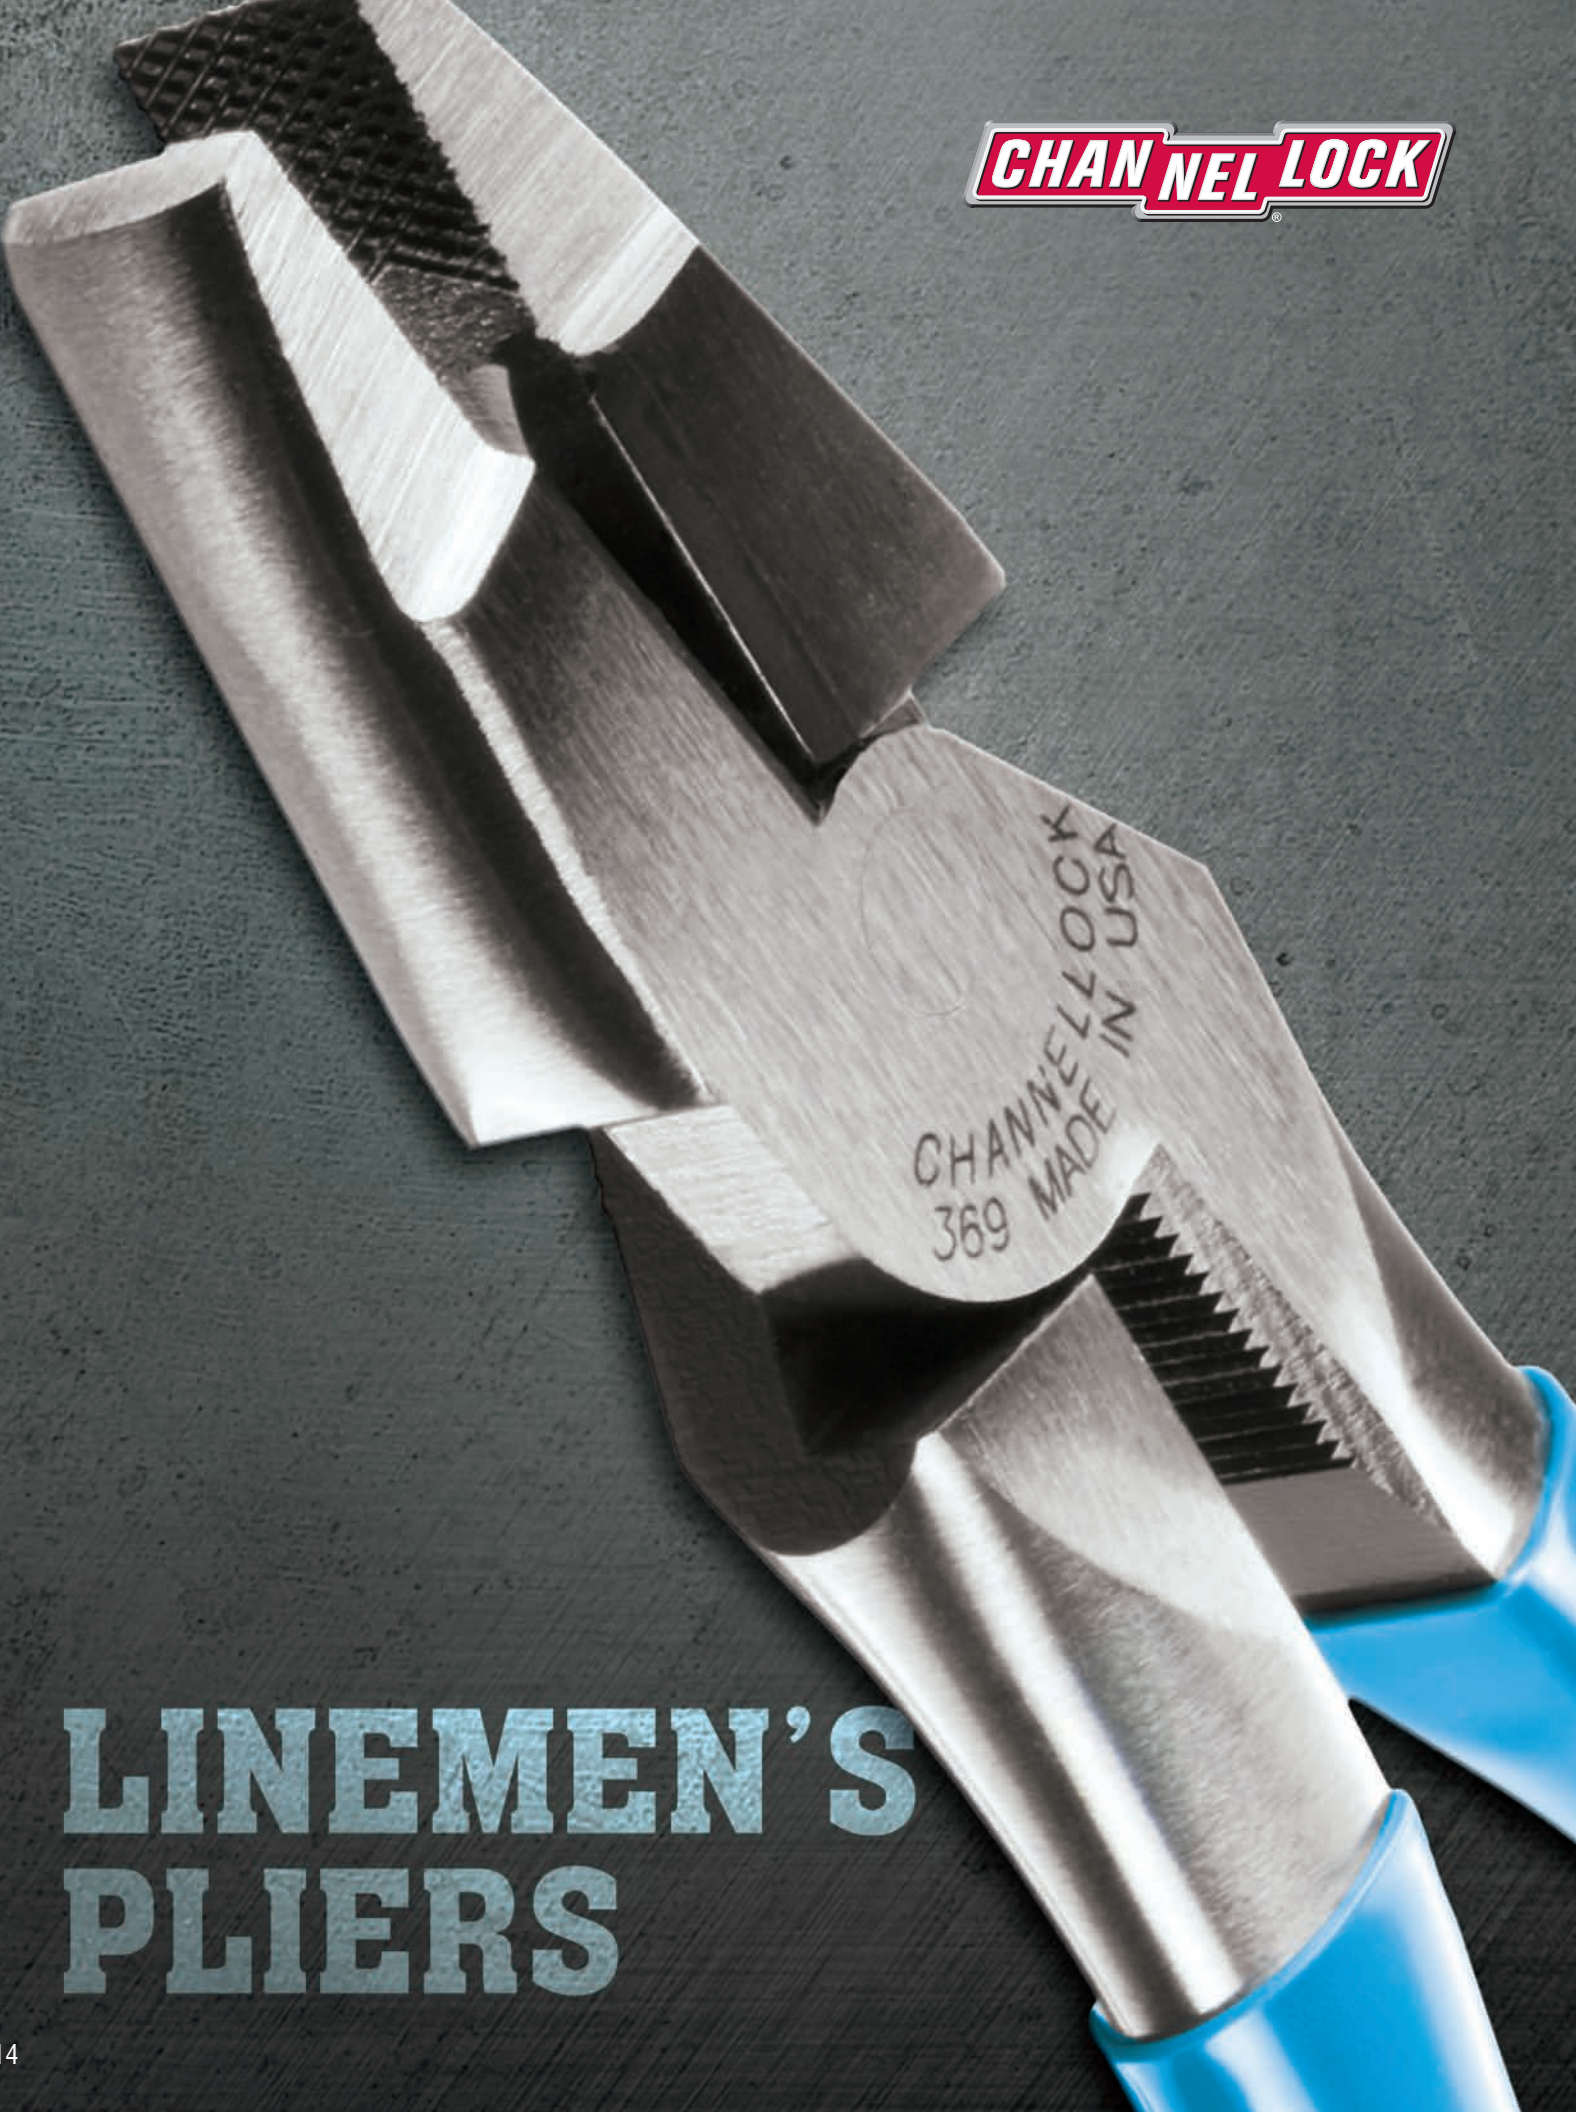

# LINEMEN'S PLIERS

# LINEMEN'S PLIERS

**XL™** Xtreme Leverage Technology means considerably less force required to cut than traditional high leverage designs.



Laser heat-treated cutting edges last longer.

Useful crushing area

CHANNELLOCK® uses high carbon C1080 steel for superior performance on the job, and an ultimate rust preventative coating.

Only CHANNELLOCK® uses precision machined knife and anvil style cutting edges to ensure perfect mating and superior cutting edge life.


## TYPES OF CUTTING EDGES



Knife Anvil

Channellock's knife and anvil cutters ensure proper cutting edge alignment, resulting in a clean cut every time.

VS.





Double Sharp

Most manufacturers use two sharp edges which can become misaligned, losing their cutting effectiveness.

CHANNELLOCK BLUE® comfort grips

## Features

- **XL™** Xtreme Leverage Technology
- Round nose
- Cuts ACSR

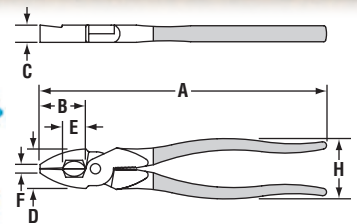



PLIER	A OVERALL LENGTH		B JAW LENGTH		C JOINT THICKNESS		D JOINT WIDTH		E CUTTING EDGE		F NOSE WIDTH		H HANDLE SPAN		WEIGHT	
	in	mm	in	mm	in	mm	in	mm	in	mm	in	mm	in	mm	pounds	grams
367	7.49	190.25	1.28	32.51	0.53	13.46	1.20	30.48	0.63	16.00	0.31	7.87	2.01	51.05	0.72	326.59
368	8.38	212.85	1.41	35.81	0.55	13.97	1.12	28.49	0.60	15.24	0.33	8.38	2.01	51.05	0.98	444.52
369	9.50	241.30	1.54	39.12	0.55	13.97	1.32	33.53	0.73	18.54	0.28	7.11	1.89	48.01	1.08	489.88
3610	10.50	266.70	1.82	46.23	0.56	14.22	1.31	33.27	0.83	21.08	0.31	7.87	2.01	51.05	1.15	521.63

# LINEMEN'S PLIERS

## Features

- **XL™** Xtreme Leverage Technology
- Round nose
- Crimps insulated and non-insulated terminals
- Fishtape puller
- Cuts ACSR

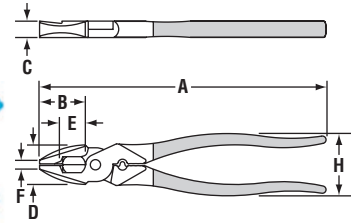


PLIER	A OVERALL LENGTH		B JAW LENGTH		C JOINT THICKNESS		D JOINT WIDTH		E CUTTING EDGE		F NOSE WIDTH		H HANDLE SPAN		WEIGHT	
	in	mm	in	mm	in	mm	in	mm	in	mm	in	mm	in	mm	pounds	grams
369CRFT™	9.50	241.30	1.54	39.12	0.55	13.97	1.32	33.53	0.73	18.54	0.29	7.37	1.89	48.01	1.08	489.88

U.S. Patent Nos. 7,415,913 and 7,395,740

## Features


- Wiremaster™ premium quality linemen's plier
- Heavy duty enclosed joint design
- High leverage
- Cuts ACSR

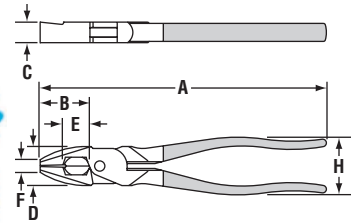

PLIER	A OVERALL LENGTH		B JAW LENGTH		C JOINT THICKNESS		D JOINT WIDTH		E CUTTING EDGE		F NOSE WIDTH		H HANDLE SPAN		WEIGHT	
	in	mm	in	mm	in	mm	in	mm	in	mm	in	mm	in	mm	pounds	grams
349	9.25	234.95	1.59	40.39	0.63	16.00	1.26	32.00	0.81	20.57	0.40	10.16	1.89	48.01	1.02	462.66

## Features


- Round nose design

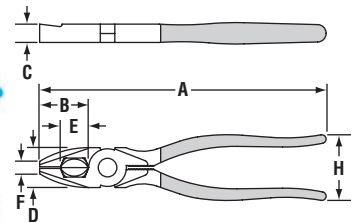

PLIER	A OVERALL LENGTH		B JAW LENGTH		C JOINT THICKNESS		D JOINT WIDTH		E CUTTING EDGE		F NOSE WIDTH		H HANDLE SPAN		WEIGHT	
	in	mm	in	mm	in	mm	in	mm	in	mm	in	mm	in	mm	pounds	grams
348	8.50	215.90	1.28	32.51	0.49	12.45	1.00	25.40	0.65	16.51	0.36	9.14	1.89	48.01	0.89	403.70


## Features

- Round nose design

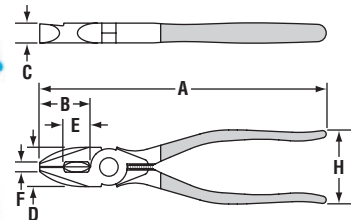

PLIER	A OVERALL LENGTH		B JAW LENGTH		C JOINT THICKNESS		D JOINT WIDTH		E CUTTING EDGE		F NOSE WIDTH		H HANDLE SPAN		WEIGHT	
	in	mm	in	mm	in	mm	in	mm	in	mm	in	mm	in	mm	pounds	grams
347	7.25	184.15	1.28	32.51	0.49	12.45	1.00	25.40	0.65	16.51	0.23	5.84	1.89	48.01	0.60	272.16



# LINEMEN'S PLIERS

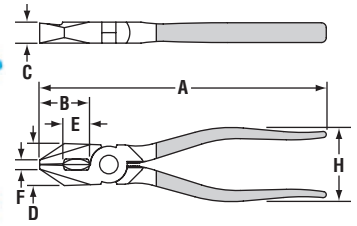

## Features

- Bevel nose

PLIER	A OVERALL LENGTH		B JAW LENGTH		C JOINT THICKNESS		D JOINT WIDTH		E CUTTING EDGE		F NOSE WIDTH		H HANDLE SPAN		WEIGHT	
	in	mm	in	mm	in	mm	in	mm	in	mm	in	mm	in	mm	pounds	grams
3047	7.25	184.15	1.28	32.51	0.55	13.97	1.00	25.40	0.59	14.99	0.23	5.84	1.89	48.01	0.58	263.08

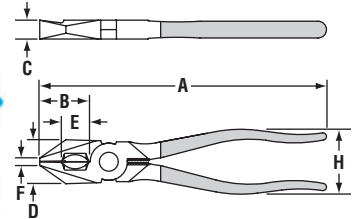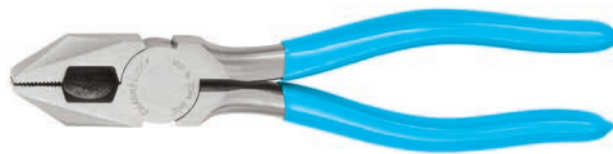

## Features


- Bevel nose

PLIER	A OVERALL LENGTH		B JAW LENGTH		C JOINT THICKNESS		D JOINT WIDTH		E CUTTING EDGE		F NOSE WIDTH		H HANDLE SPAN		WEIGHT	
	in	mm	in	mm	in	mm	in	mm	in	mm	in	mm	in	mm	pounds	grams
3048	8.50	215.90	1.50	38.10	0.63	16.00	1.32	33.53	0.75	19.05	0.22	5.59	1.89	48.01	1.02	462.66

# IRONWORKER'S PLIERS

## Features


- Ironworker's plier
- Coiled spring
- Dog leg handle for better leverage when twisting wire
- Cuts ACSR

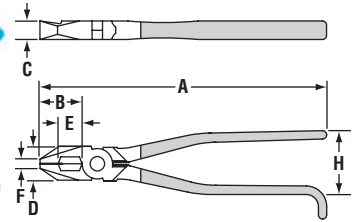

PLIER	A OVERALL LENGTH		B JAW LENGTH		C JOINT THICKNESS		D JOINT WIDTH		E CUTTING EDGE		F NOSE WIDTH		H HANDLE SPAN		WEIGHT	
	in	mm	in	mm	in	mm	in	mm	in	mm	in	mm	in	mm	pounds	grams
350S	8.75	222.25	1.28	32.51	0.53	13.46	1.06	26.92	0.66	16.76	0.28	7.11	1.89	48.01	0.81	367.41


## Features

- Larger, stockier beveled nose
- Aggressive crosshatched tooth pattern for maximum grip
- Coiled spring
- Dog leg handle for better leverage when twisting wire
- Cuts ACSR

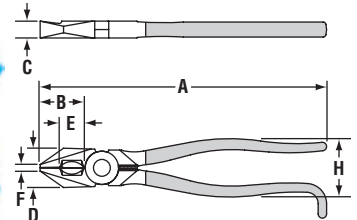

PLIER	A OVERALL LENGTH		B JAW LENGTH		C JOINT THICKNESS		D JOINT WIDTH		E CUTTING EDGE		F NOSE WIDTH		H HANDLE SPAN		WEIGHT	
	in	mm	in	mm	in	mm	in	mm	in	mm	in	mm	in	mm	pounds	grams
351S	9.50	241.30	1.47	37.34	0.56	14.22	1.31	33.27	0.81	20.57	0.22	5.59	2.01	51.05	1.20	544.31


**CHANNEL LOCK**

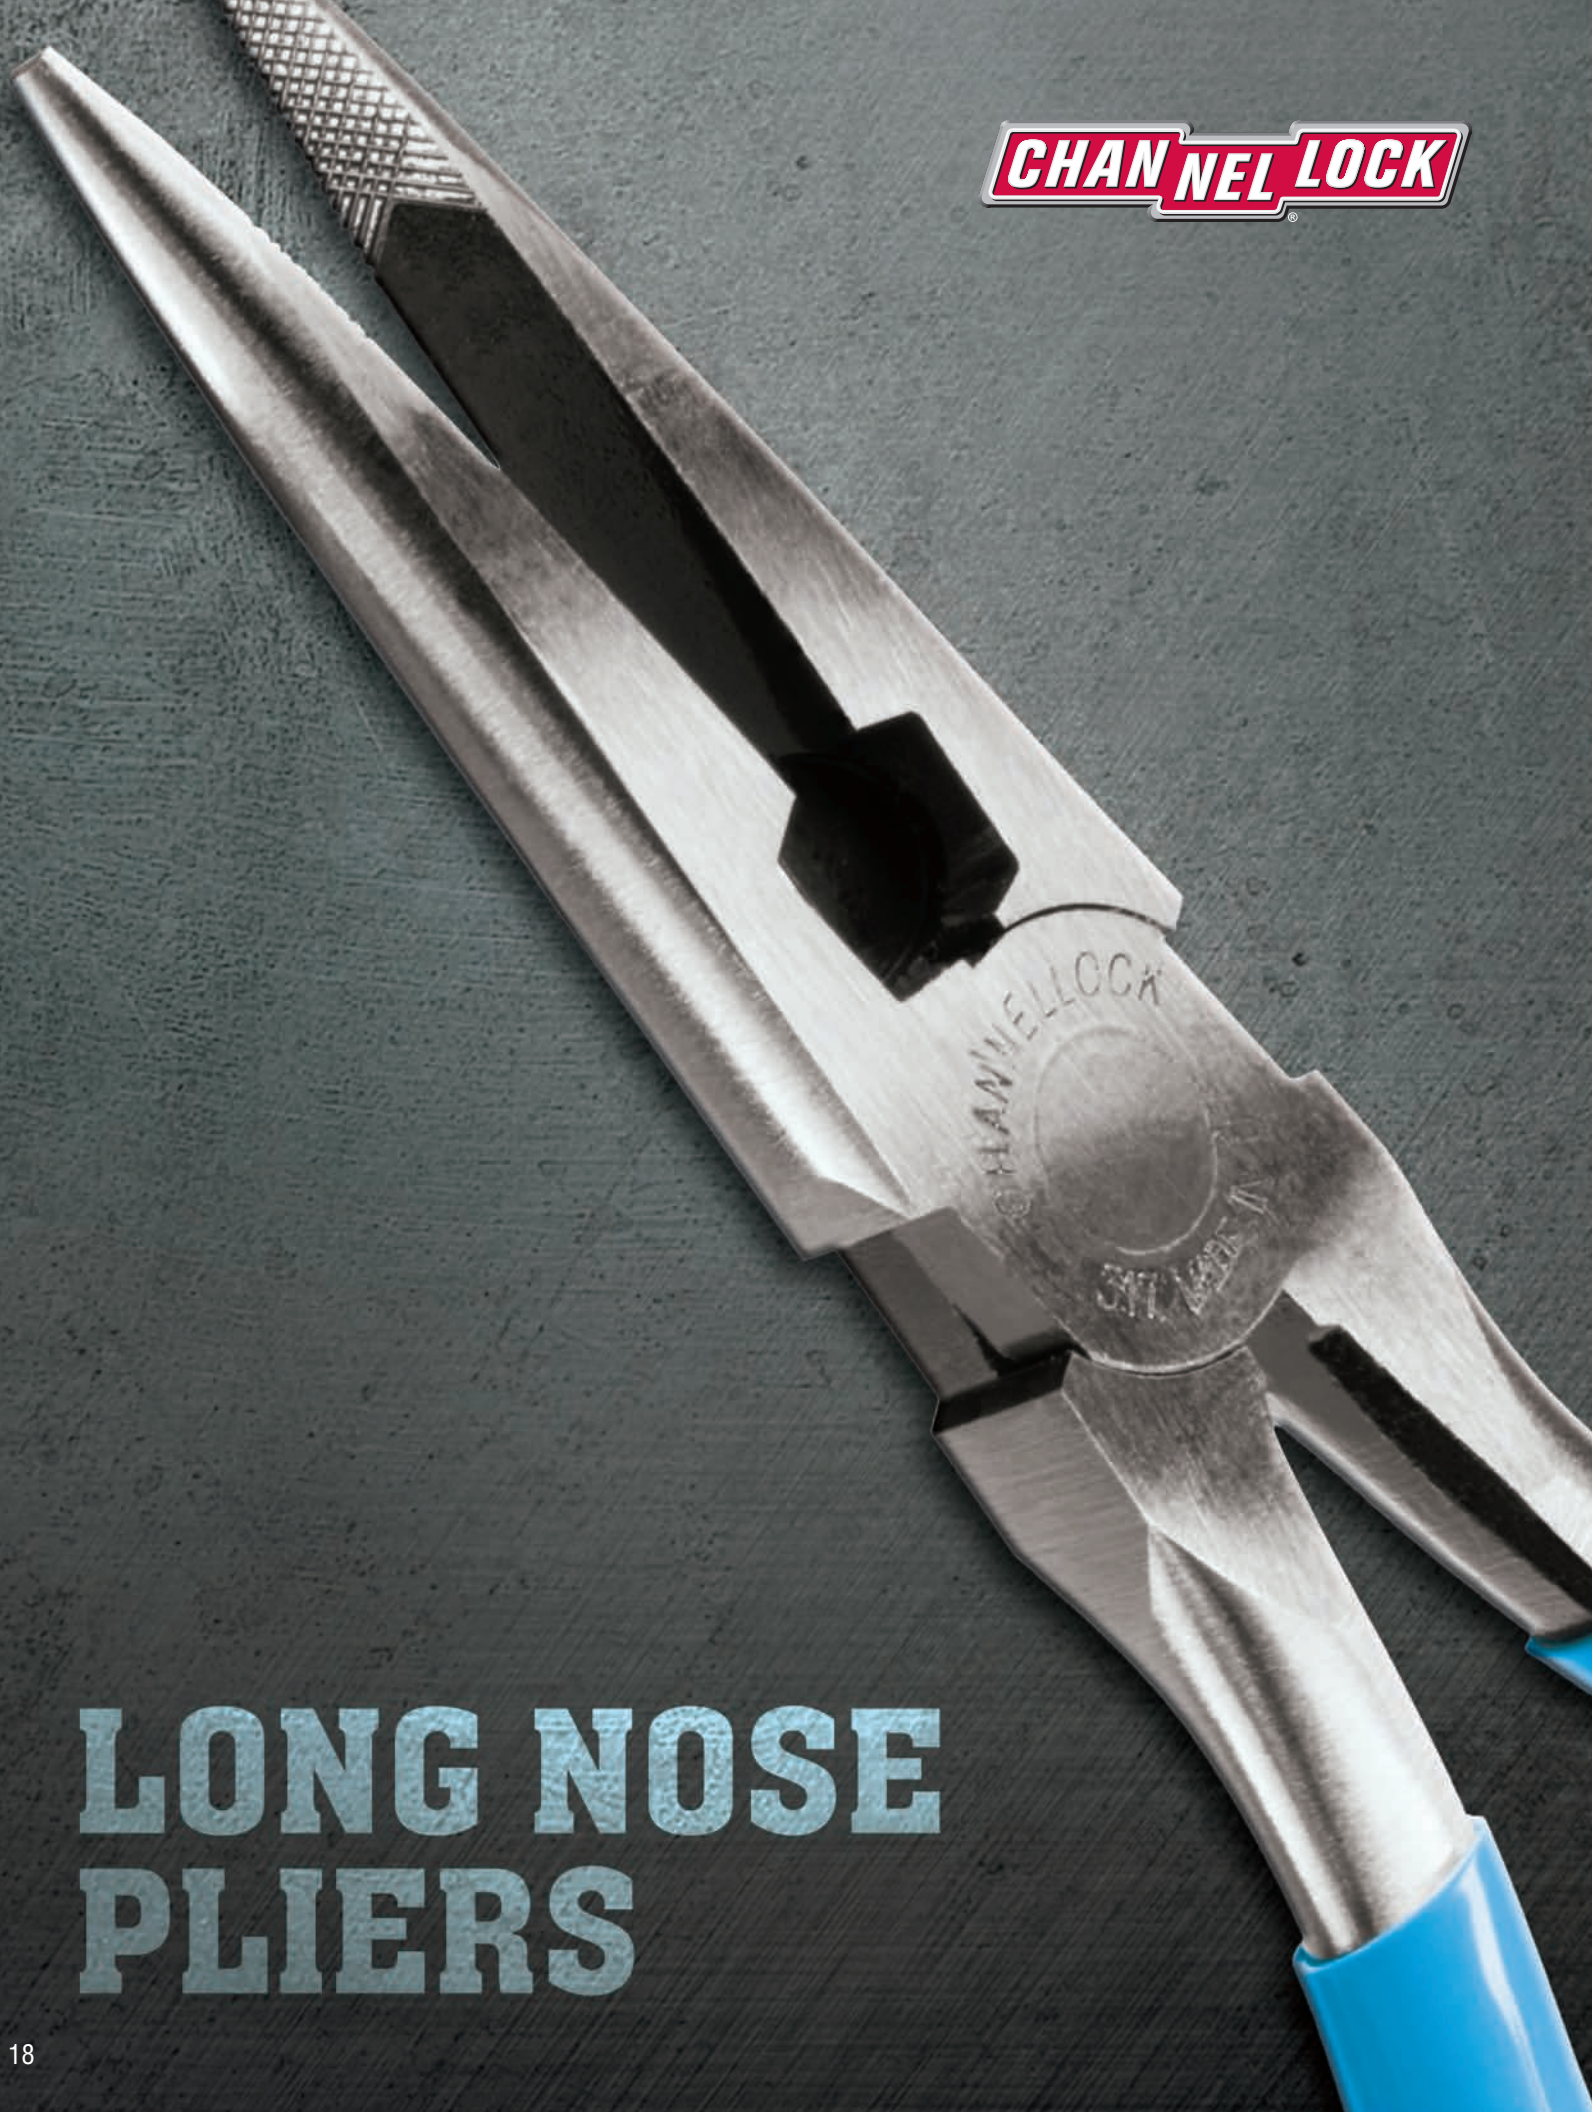

# LONG NOSE PLIERS

# LONG NOSE PLIERS

Only CHANNELLOCK® uses precision machined knife and anvil style cutting edges to ensure perfect mating and superior cutting edge life.

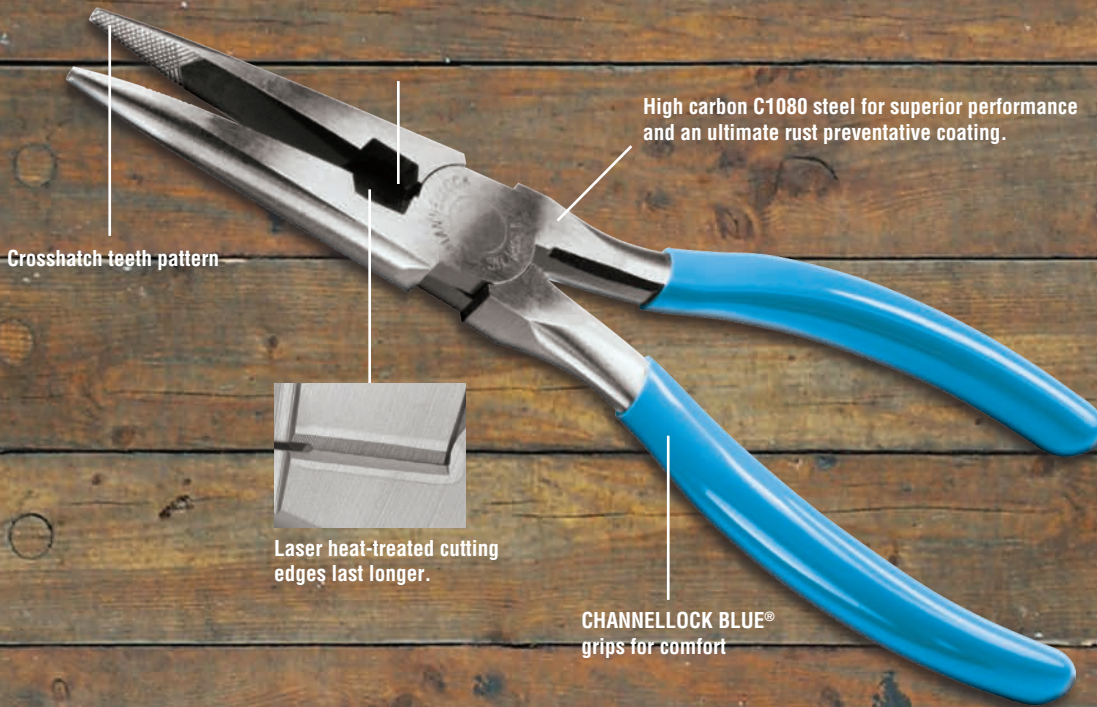

## Features

- 317 – with side cutter
- 3017 – without side cutter

PLIER	A OVERALL LENGTH		B JAW LENGTH		C JOINT THICKNESS		D JOINT WIDTH		E CUTTING EDGE		F NOSE WIDTH		G NOSE THICKNESS		H HANDLE SPAN		WEIGHT	
	in	mm	in	mm	in	mm	in	mm	in	mm	in	mm	in	mm	in	mm	pounds	grams
317	8.00	203.20	2.36	59.94	0.41	10.41	0.87	22.10	0.41	10.41	0.14	3.56	0.11	2.79	1.89	48.01	0.55	249.48
3017	8.00	203.20	2.36	59.94	0.41	10.41	0.87	22.10	N/A	N/A	0.14	3.56	0.11	2.79	1.89	48.01	0.55	249.48




## Features

- 326 – with side cutter
- 3026 – without side cutter

PLIER	A OVERALL LENGTH		B JAW LENGTH		C JOINT THICKNESS		D JOINT WIDTH		E CUTTING EDGE		F NOSE WIDTH		G NOSE THICKNESS		H HANDLE SPAN		WEIGHT	
	in	mm	in	mm	in	mm	in	mm	in	mm	in	mm	in	mm	in	mm	pounds	grams
326	6.10	154.94	2.08	52.83	0.41	10.41	0.75	19.05	0.41	10.41	0.10	2.54	N/A	N/A	1.89	48.01	0.36	163.29
3026	6.10	154.94	2.08	52.83	0.41	10.41	0.75	19.05	N/A	N/A	0.10	2.54	0.11	2.79	1.89	48.01	0.33	149.69



# LONG NOSE PLIERS

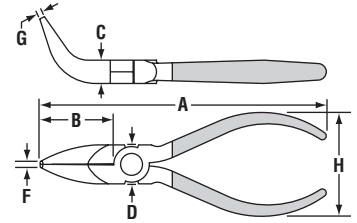

## Features

- Bent nose
- No cutter


PLIER	A OVERALL LENGTH		B JAW LENGTH		C JOINT THICKNESS		D JOINT WIDTH		E CUTTING EDGE		F NOSE WIDTH		G NOSE THICKNESS		H HANDLE SPAN		WEIGHT	
	in	mm	in	mm	in	mm	in	mm	in	mm	in	mm	in	mm	pounds	grams		
386	5.75	146.05	1.65	41.91	0.41	10.41	0.75	19.05	N/A	N/A	0.10	2.54	0.11	2.79	1.89	48.01	0.38	172.37

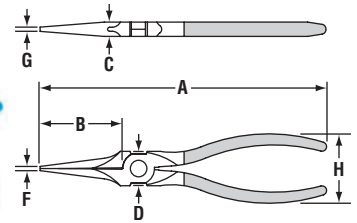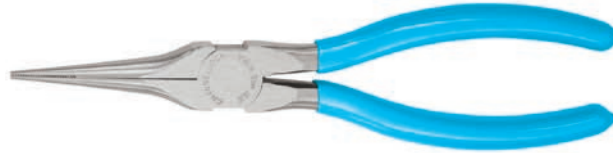

## Features

- Snipe nose for confined spaces
- No cutter


PLIER	A OVERALL LENGTH		B JAW LENGTH		C JOINT THICKNESS		D JOINT WIDTH		E CUTTING EDGE		F NOSE WIDTH		G NOSE THICKNESS		H HANDLE SPAN		WEIGHT	
	in	mm	in	mm	in	mm	in	mm	in	mm	in	mm	in	mm	pounds	grams		
3037	8.00	203.20	2.44	61.98	0.37	9.40	0.87	22.10	N/A	N/A	0.12	3.05	0.11	2.79	1.89	48.01	0.45	204.12

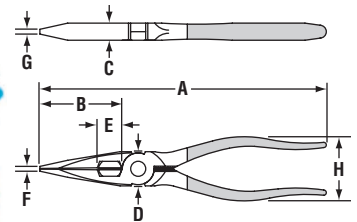

## Features

- Heavy duty side cutter
- Useful crushing area

PLIER	A OVERALL LENGTH		B JAW LENGTH		C JOINT THICKNESS		D JOINT WIDTH		E CUTTING EDGE		F NOSE WIDTH		G NOSE THICKNESS		H HANDLE SPAN		WEIGHT	
	in	mm	in	mm	in	mm	in	mm	in	mm	in	mm	in	mm	pounds	grams		
318	8.38	212.85	2.30	58.42	0.50	12.70	1.00	25.40	0.63	16.00	0.16	4.06	0.11	2.79	1.89	48.01	0.59	267.62

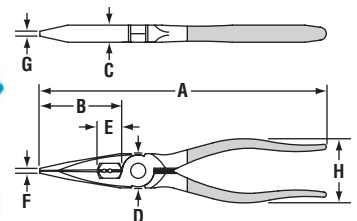

## Features


- Heavy duty side cutter
- 12 and 14 AWG wire stripper
- Useful crushing area

PLIER	A OVERALL LENGTH		B JAW LENGTH		C JOINT THICKNESS		D JOINT WIDTH		E CUTTING EDGE		F NOSE WIDTH		G NOSE THICKNESS		H HANDLE SPAN		WEIGHT	
	in	mm	in	mm	in	mm	in	mm	in	mm	in	mm	in	mm	pounds	grams		
318WS	8.38	212.85	2.30	58.42	0.50	12.70	1.00	25.40	0.63	16.00	0.16	4.06	0.11	2.79	1.89	48.01	0.59	267.62

# LONG REACH PLIERS

## Features

- Flat nose
- Crosshatch teeth pattern

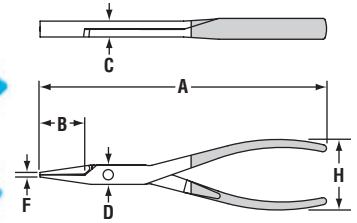


PLIER	A OVERALL LENGTH		B JAW LENGTH		C JOINT THICKNESS		D JOINT WIDTH		E CUTTING EDGE		F NOSE WIDTH		G NOSE THICKNESS		H HANDLE SPAN		WEIGHT	
	in	mm	in	mm	in	mm	in	mm	in	mm	in	mm	in	mm	pounds	grams		
718	7.88	200.15	1.18	29.97	0.43	10.92	0.53	13.46	N/A	N/A	0.53	13.46	N/A	N/A	1.89	48.01	0.51	231.33

728



758

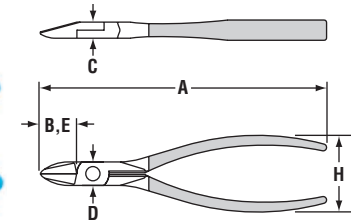


## Features

- 728 – Diagonal side cutter
- 758 – Flush cutter

PLIER	A OVERALL LENGTH		B JAW LENGTH		C JOINT THICKNESS		D JOINT WIDTH		E CUTTING EDGE		F NOSE WIDTH		G NOSE THICKNESS		H HANDLE SPAN		WEIGHT	
	in	mm	in	mm	in	mm	in	mm	in	mm	in	mm	in	mm	pounds	grams		
728	7.50	190.50	0.91	23.11	0.37	9.40	0.59	14.99	0.91	23.11	N/A	N/A	N/A	N/A	1.89	48.01	0.42	190.51
758	7.50	190.50	0.91	23.11	0.37	9.40	0.59	14.99	0.91	23.11	N/A	N/A	N/A	N/A	1.89	48.01	0.42	190.51

## Features


- Needle nose
- Crosshatch teeth pattern

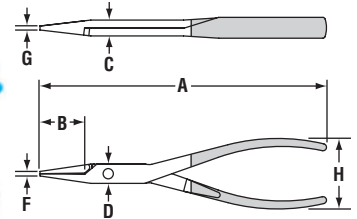

PLIER	A OVERALL LENGTH		B JAW LENGTH		C JOINT THICKNESS		D JOINT WIDTH		E CUTTING EDGE		F NOSE WIDTH		G NOSE THICKNESS		H HANDLE SPAN		WEIGHT	
	in	mm	in	mm	in	mm	in	mm	in	mm	in	mm	in	mm	pounds	grams		
738	7.88	200.15	1.18	26.97	0.43	10.92	0.53	13.46	N/A	N/A	0.10	2.54	0.08	2.03	1.89	48.01	0.47	213.19

## Features

- End cutter
- Coupe-fil en bout
- Alicata de corte frontal

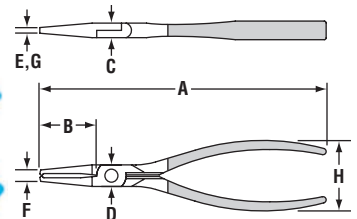

PLIER	A OVERALL LENGTH		B JAW LENGTH		C JOINT THICKNESS		D JOINT WIDTH		E CUTTING EDGE		F NOSE WIDTH		G NOSE THICKNESS		H HANDLE SPAN		WEIGHT	
	in	mm	in	mm	in	mm	in	mm	in	mm	in	mm	in	mm	pounds	grams		
748	8.00	203.20	1.56	39.62	0.38	9.65	0.59	14.99	0.19	4.83	0.28	7.11	0.19	4.83	1.89	48.01	0.46	208.65

**CHANNEL LOCK**



CHANNEL LOCK  
MADE IN USA  
No 526

# SLIP JOINT PLIERS

# SLIP JOINT PLIERS

CHANNELLOCK® uses high carbon C1080 steel for superior performance on the job, and an ultimate rust preventative coating.



Wire cutting shear

PermaLock® fastener eliminates nut and bolt failure.

CHANNELLOCK BLUE® comfort grips

## Features

- Wire cutting shear



## Features

- Thin nose
- Wire cutting shear
- Crosshatch jaws for maximum grip

PLIER	A OVERALL LENGTH		B JAW LENGTH		C JOINT THICKNESS		D JOINT WIDTH		E CUTTING EDGE		H HANDLE SPAN		WEIGHT	
	in	mm	in	mm	in	mm	in	mm	in	mm	in	mm	pounds	grams
526	6.50	165.10	0.96	24.38	0.43	10.92	1.28	32.51	N/A	N/A	1.89	48.01	0.51	231.33
528	8.00	203.20	0.99	25.15	0.36	9.14	1.17	29.72	N/A	N/A	1.82	46.23	0.58	263.08



PLIER	A OVERALL LENGTH		B JAW LENGTH		C JOINT THICKNESS		D JOINT WIDTH		E CUTTING EDGE		H HANDLE SPAN		WEIGHT	
	in	mm	in	mm	in	mm	in	mm	in	mm	in	mm	pounds	grams
516	6.50	165.10	1.10	27.94	0.30	7.62	1.22	30.99	N/A	N/A	1.89	48.01	0.45	204.12

# SLIP JOINT PLIERS

## Features


- Side cutter
- Crosshatch jaws for maximum grip



PLIER	A OVERALL LENGTH		B JAW LENGTH		C JOINT THICKNESS		D JOINT WIDTH		E CUTTING EDGE		H HANDLE SPAN		WEIGHT	
	in	mm	in	mm	in	mm	in	mm	in	mm	in	mm	pounds	grams
537	7.63	193.80	1.71	43.43	0.43	10.92	1.38	35.05	0.43	10.92	1.89	48.01	0.61	276.69

## Features


- Wire cutting shear
- Heavy duty construction
- Crosshatch jaws for maximum grip

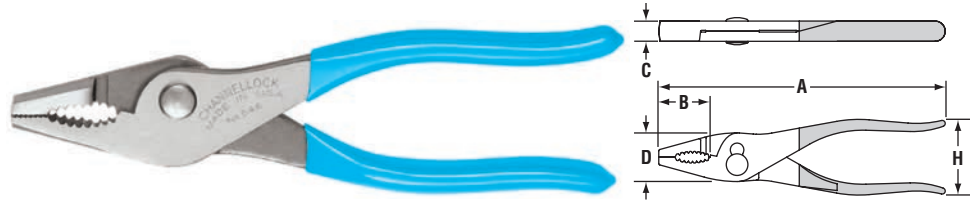

PLIER	A OVERALL LENGTH		B JAW LENGTH		C JOINT THICKNESS		D JOINT WIDTH		E CUTTING EDGE		H HANDLE SPAN		WEIGHT	
	in	mm	in	mm	in	mm	in	mm	in	mm	in	mm	pounds	grams
546	6.63	168.40	1.18	29.97	0.47	11.94	1.14	28.96	N/A	N/A	2.01	51.05	0.52	235.87
548	8.00	203.20	1.18	29.97	0.47	11.94	1.26	32.00	N/A	N/A	1.89	48.01	0.65	294.84

## Features

- Wire cutting shear
- Heavy duty construction
- Crosshatch jaws for maximum grip

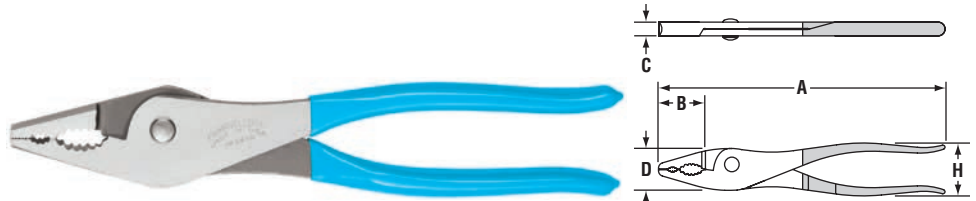


PLIER	A OVERALL LENGTH		B JAW LENGTH		C JOINT THICKNESS		D JOINT WIDTH		E CUTTING EDGE		H HANDLE SPAN		WEIGHT	
	in	mm	in	mm	in	mm	in	mm	in	mm	in	mm	pounds	grams
5410	10.00	254.00	1.56	39.62	0.47	11.94	1.58	40.13	N/A	N/A	1.89	48.01	0.87	394.63

## HOSE CLAMP

## Features

- Hose clamp
- Wire cutting shear
- Heavy duty construction
- Crosshatch jaws for maximum grip

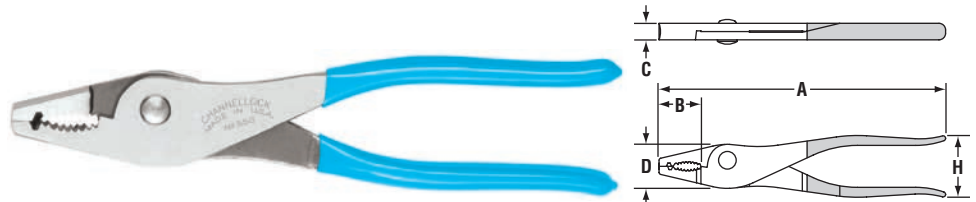

PLIER	A OVERALL LENGTH		B JAW LENGTH		C JOINT THICKNESS		D JOINT WIDTH		E CUTTING EDGE		H HANDLE SPAN		WEIGHT	
	in	mm	in	mm	in	mm	in	mm	in	mm	in	mm	pounds	grams
558	8.00	203.20	1.18	29.97	0.47	11.94	1.26	32.00	N/A	N/A	1.89	48.01	0.61	276.69

**CHANNEL LOCK**




**SPECIAL  
PURPOSE  
PLIERS**

# SPECIAL PURPOSE PLIERS

## Features


- Ergonomic handle
- Wire stripper, cutter
- Curved comfort grip
- Strips 10-20 AWG



PLIER	A OVERALL LENGTH		B JAW LENGTH		C JOINT THICKNESS		D JOINT WIDTH		E CUTTING EDGE		H HANDLE SPAN		WEIGHT	
	in	mm	in	mm	in	mm	in	mm	in	mm	in	mm	pounds	grams
957	7.00	177.80	1.68	42.67	0.46	11.68	1.30	33.02	0.57	14.48	2.05	52.07	0.34	154.22

## Features


- Wire stripper, cutter
- Strips 10-20 AWG



PLIER	A OVERALL LENGTH		B JAW LENGTH		C JOINT THICKNESS		D JOINT WIDTH		E CUTTING EDGE		H HANDLE SPAN		WEIGHT	
	in	mm	in	mm	in	mm	in	mm	in	mm	in	mm	pounds	grams
958	6.25	158.75	1.61	40.89	0.47	11.94	1.30	33.02	0.43	10.92	1.89	48.01	0.34	154.22

## Features


- Wire cutter, stripper
- Crimps insulated and non-insulated terminals.
- Cuts stranded AWG 10-22, solid AWG 8-20
- Cuts bolt sizes: 10-24, 10-32, 4-40, 6-32, 8-32



PLIER	A OVERALL LENGTH		B JAW LENGTH		C JOINT THICKNESS		D JOINT WIDTH		E CUTTING EDGE		H HANDLE SPAN		WEIGHT	
	in	mm	in	mm	in	mm	in	mm	in	mm	in	mm	pounds	grams
959	8.25	209.55	1.26	32.00	0.47	11.94	1.61	40.89	0.24	6.10	2.17	55.12	0.34	154.22

## Features

- Coax cable tool
- Three stripping stations for RG-6 and RG-59
- Crimps RG-6 and RG-59 coax connectors.





PLIER	A OVERALL LENGTH		B JAW LENGTH		C JOINT THICKNESS		D JOINT WIDTH		E CUTTING EDGE		H HANDLE SPAN		WEIGHT	
	in	mm	in	mm	in	mm	in	mm	in	mm	in	mm	pounds	grams
919	8.25	209.55	1.13	28.70	0.47	11.94	1.63	41.40	0.50	12.70	2.17	55.12	0.46	208.65

# SPECIAL PURPOSE PLIERS

## Features


- Strips wire with no damage to conductor.
- Crimps insulated and non-insulated wire.
- Cuts AWG 10-22
- Cuts bolt sizes: 10-24, 6-32, 8-32, 10-32, 4-40
- Crimps coax cable
- Crimps 7-8mm ignition terminals

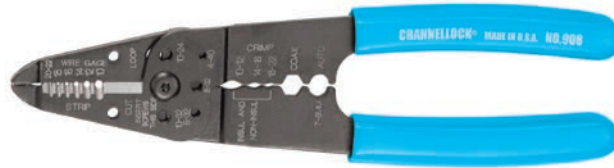

PLIER	A OVERALL LENGTH		B JAW LENGTH		C JOINT THICKNESS		D JOINT WIDTH		E CUTTING EDGE		H HANDLE SPAN		WEIGHT	
	in	mm	in	mm	in	mm	in	mm	in	mm	in	mm	pounds	grams
908	8.25	209.55	1.68	42.67	0.34	8.64	1.48	37.59	0.49	12.45	2.18	55.37	0.48	217.72

## Features

- Retaining ring pliers
- Converts from internal to external rings with simple switch of the red tab.
- 929 – External: 1 1/2" to 4", Internal: 1 13/16" to 4" Includes tips: .090, .108, .120 15° and .090, .108, .120 90°
- 927 – External: 1/4" to 2", Internal: 3/8" to 2" Includes tips: .039, .047, .074 straight and .039, .047 90°
- 926 – External: 1/8" to 1", Internal: 1/4" to 1" Includes tips: .023, .039, .047 straight and .039, .047 90°




PLIER	A OVERALL LENGTH		B JAW LENGTH		C JOINT THICKNESS		D JOINT WIDTH		E CUTTING EDGE		H HANDLE SPAN		WEIGHT	
	in	mm	in	mm	in	mm	in	mm	in	mm	in	mm	pounds	grams
929	10.00	254.00	1.38	35.05	1.00	25.40	1.25	31.75	N/A	N/A	4.75	120.65	1.06	480.81
927	8.00	203.20	1.60	40.64	0.97	24.64	1.71	43.43	N/A	N/A	4.85	123.19	0.50	226.80
926	6.25	158.75	1.31	33.27	0.87	22.10	1.12	28.45	N/A	N/A	3.29	83.57	0.32	145.15

U.S. Patent No. 7,194,936 B2 Not an ISO Certified Product.


## Features

- Locknut plier
- Fits most popular UL locknut sizes: 1/2", 3/4", 1" (metal, PVC, plastic).
- Thin profile for confined spaces



PLIER	A OVERALL LENGTH		B JAW LENGTH		C JOINT THICKNESS		D JOINT WIDTH		E CUTTING EDGE		H HANDLE SPAN		WEIGHT	
	in	mm	in	mm	in	mm	in	mm	in	mm	in	mm	pounds	grams
960	8.50	215.90	2.38	60.45	0.21	5.33	0.92	23.37	N/A	N/A	2.54	64.52	0.48	217.72


U.S. Patent No. 7,197,967



# SPECIAL PURPOSE PLIERS

## Features


- Crimps and cuts insulated and non-insulated solderless connections and terminals.
- Cuts 10-22 AWG wire

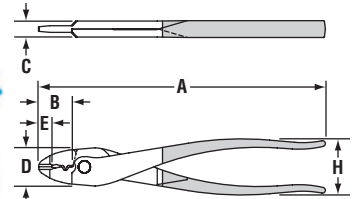

PLIER	A OVERALL LENGTH		B JAW LENGTH		C JOINT THICKNESS		D JOINT WIDTH		E CUTTING EDGE		H HANDLE SPAN		WEIGHT	
	in	mm	in	mm	in	mm	in	mm	in	mm	in	mm	pounds	grams
909	9.50	241.30	1.16	29.46	0.48	12.19	1.32	33.53	0.43	10.92	1.89	48.01	0.94	426.38

## Features


- Fence tool
- Hammer on jaw
- Staple starter and puller
- Wire stretcher, splicer, 2 cutters

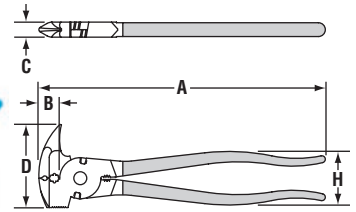

PLIER	A OVERALL LENGTH		B JAW LENGTH		C JOINT THICKNESS		D JOINT WIDTH		E CUTTING EDGE		H HANDLE SPAN		WEIGHT	
	in	mm	in	mm	in	mm	in	mm	in	mm	in	mm	pounds	grams
85	10.38	263.65	0.75	19.05	0.53	13.46	2.95	74.93	N/A	N/A	2.09	53.09	1.46	662.24

## Features

- Professional welder's pliers
- **HLT**™ Xtreme Leverage Technology
- Grooved nose easily removes spatter, grips and draws out wire.
- Installs and removes tips, nozzles, and insulation bushings.
- Coiled spring
- Hammer

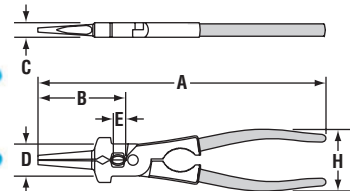


PLIER	A OVERALL LENGTH		B JAW LENGTH		C JOINT THICKNESS		D JOINT WIDTH		E CUTTING EDGE		F NOSE WIDTH		H HANDLE SPAN		WEIGHT	
	in	mm	in	mm	in	mm	in	mm	in	mm	in	mm	in	mm	pounds	grams
360	9.00	228.60	2.72	69.04	0.45	11.43	1.50	38.10	0.39	9.93	0.30	7.49	2.00	50.80	0.74	334.75

## RESCUE TOOL

## Features

- Spanner wrench tightens and loosens up to 6" hose couplings.
- Shuts off gas safety valves.
- Pries windows and doors open.
- Will cut high tensile steel and ceiling wire.

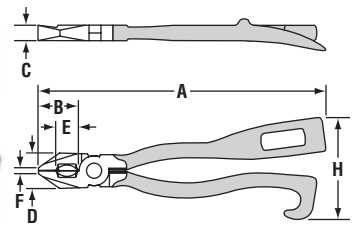

PLIER	A OVERALL LENGTH		B JAW LENGTH		C JOINT THICKNESS		D JOINT WIDTH		E CUTTING EDGE		F NOSE WIDTH		H HANDLE SPAN		WEIGHT	
	in	mm	in	mm	in	mm	in	mm	in	mm	in	mm	in	mm	pounds	grams
88	10.46	265.68	1.49	37.85	0.56	14.22	1.11	28.19	0.78	19.81	0.22	5.59	3.72	94.49	1.62	737.09

U.S. Patent No. 8,065,939

## Features


- Ultra durable full grain leather
- Fits up to a 2 inch belt
- Made in the USA



NO.	DESCRIPTION
RTHL	Rescue tool holster for Plier #88 and #89



# THE FIRST CHOICE OF THE FIRST RESPONDER.

BASED ON REAL-WORLD FEEDBACK FROM FIRST RESPONDERS, OUR NEW 86 RESCUE TOOL IS DESIGNED FOR EASY, INTUITIVE, ONE-HAND OPERATION IN HIGH-STRESS SITUATIONS.

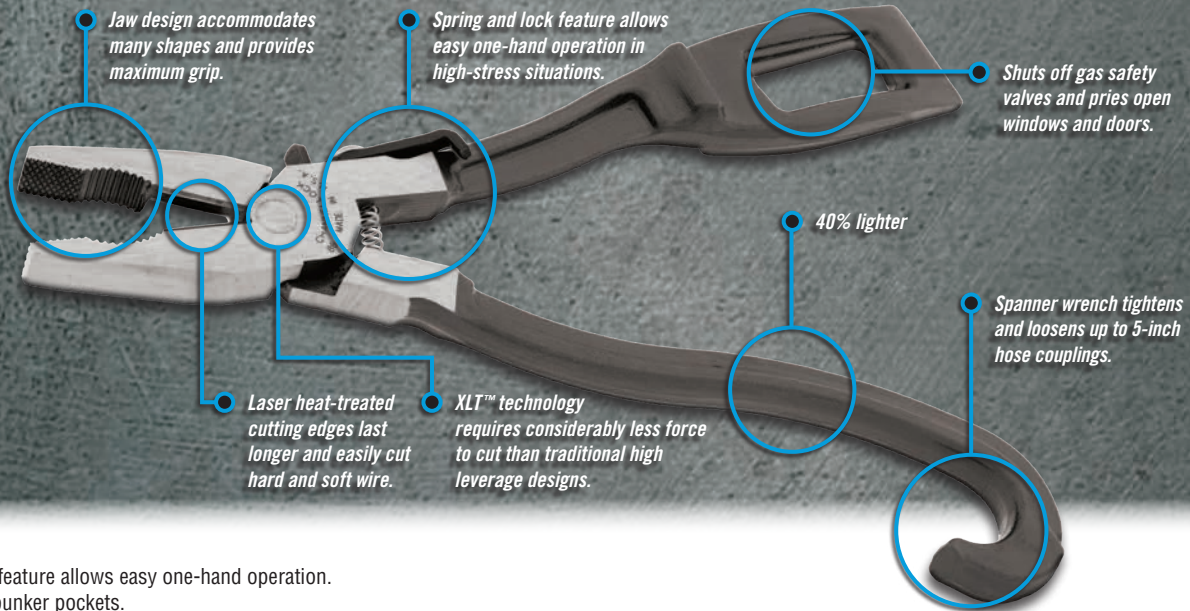

## Features

- Spring and lock feature allows easy one-hand operation.
- Fits securely in bunker pockets.
- Jaw design accommodates many shapes and provides maximum grip.
- Shuts off gas safety valves.
- Pries windows and doors open.
- Spanner wrench tightens and loosens hose couplings.
- **XLT™** Xtreme Leverage Technology means considerably less force required to cut than traditional high leverage designs.
- 40% lighter

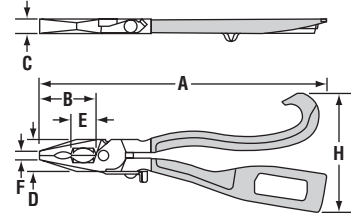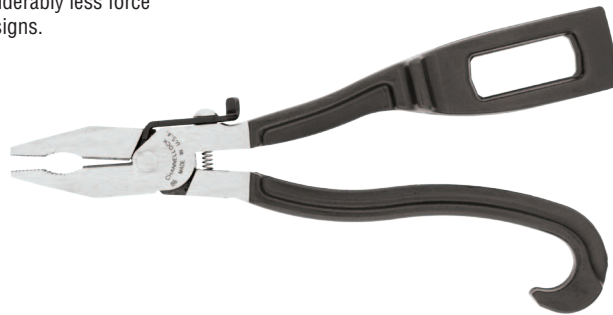


PLIER	A OVERALL LENGTH		B JAW LENGTH		C JOINT THICKNESS		D JOINT WIDTH		E CUTTING EDGE		F NOSE WIDTH		H HANDLE SPAN		WEIGHT	
	in	mm	in	mm	in	mm	in	mm	in	mm	in	mm	in	mm	pounds	grams
<b>NEW 86</b>	9.03	229.36	1.78	45.21	0.45	11.43	1.00	25.40	0.72	18.29	0.25	6.35	3.76	95.50	0.90	408.23

U.S. Patent No. 8,065,939

## Features

- Narrow jaw profile fits in tight spots.
- Hardened cutting edges shear through soft metal.
- Standard battery cables are no match for its cutting power.
- Spanner wrench tightens and loosens hose couplings.
- Pries windows and doors open.
- Shuts off gas safety valves.

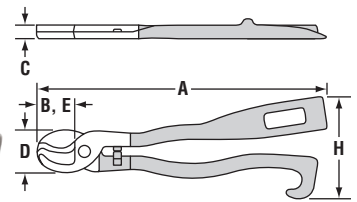

PLIER	A OVERALL LENGTH		B JAW LENGTH		C JOINT THICKNESS		D JOINT WIDTH		E CUTTING EDGE		H HANDLE SPAN		WEIGHT	
	in	mm	in	mm	in	mm	in	mm	in	mm	in	mm	pounds	grams
<b>89</b>	10.99	279.15	1.43	36.32	0.53	13.46	1.62	41.15	1.43	36.32	3.87	98.30	1.59	721.21
<b>87</b>	8.88	225.43	1.43	36.32	0.53	13.46	1.62	41.15	1.43	36.32	3.54	89.92	1.13	512.56

U.S. Patent No. 8,065,939


Not for steel. Ne couper pas d'auger. No apto para cortar cable de acero.

**CODE BLUE**  
by  
**CHANNEL LOCK**



**CODE BLUE® PLIERS**

# CODE BLUE® PLIERS



Laser heat-treated cutting edges last longer.

**BRING YOUR TOOLBOX UP TO CODE.**

**CODE BLUE**  
by  
**CHANNELLOCK**



CHANNELLOCK® uses high carbon steel for superior performance on the job, and an ultimate rust preventative coating.


Only CHANNELLOCK® uses precision machined knife and anvil style cutting edges to ensure perfect mating and superior cutting edge life.

Iconic Code Blue® handles. Composite TPE core and over mold provide durability, comfort and secure grip.

Note: CHANNELLOCK BLUE® and red grips are trademarks of CHANNELLOCK® and are only for comfort. They are NOT recommended or warranted for dielectric properties.

Made in the USA

# CODE BLUE® PLIERS

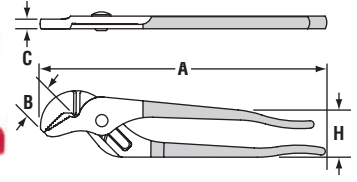


## Features

- Tongue and groove
- 421CB – SAFE-T-STOP™

PLIER	A OVERALL LENGTH		B JAW LENGTH		C JOINT THICKNESS		H HANDLE SPAN		WEIGHT		NUMBER OF ADJUSTMENTS	JAW CAPACITY	
	in	mm	in	mm	in	mm	in	mm	pounds	grams		in	mm
430CB	10.50	266.70	1.38	35.05	0.44	11.18	2.25	57.15	1.18	535.24	7	2.00	50.80
420CB	9.38	238.25	1.12	28.45	0.47	11.94	1.75	44.45	0.87	394.63	5	1.50	38.10
421CB	9.38	238.25	1.12	28.45	0.47	11.94	1.75	44.45	0.82	371.95	5	1.50	38.10

## Features


- Laser heat-treated teeth grip better and last longer.
- Ergonomically designed offset head for greater leverage.
- Special jaw design accommodates many shapes.

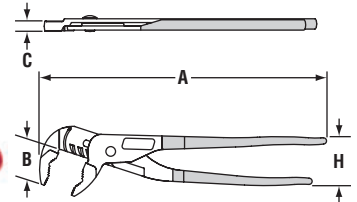


PLIER	A OVERALL LENGTH		B JAW LENGTH		C JOINT THICKNESS		H HANDLE SPAN		WEIGHT		NUMBER OF ADJUSTMENTS	JAW CAPACITY	
	in	mm	in	mm	in	mm	in	mm	pounds	grams		in	mm
GL10CB	9.50	241.30	1.34	34.04	0.36	9.14	2.17	55.12	0.80	362.87	5	1.25	31.75

## Features

- **HLT™** Xtreme Leverage Technology
- Round nose
- Cuts ACSR
- 369CRFTCB – Crimps insulated and non-insulated terminals
- 369CRFTCB – Fishtape puller

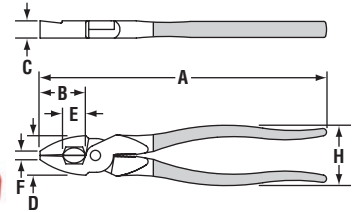


PLIER	A OVERALL LENGTH		B JAW LENGTH		C JOINT THICKNESS		D JOINT WIDTH		E CUTTING EDGE		F NOSE WIDTH		H HANDLE SPAN		WEIGHT	
	in	mm	in	mm	in	mm	in	mm	in	mm	in	mm	in	mm	pounds	grams
369CB	9.50	241.30	1.54	39.12	0.55	13.97	1.32	33.53	0.73	18.54	0.28	7.11	2.13	54.10	1.08	489.88
369CRFTCB	9.50	241.30	1.54	39.12	0.55	13.97	1.32	33.53	0.73	18.54	0.29	7.37	2.13	54.10	1.08	489.88

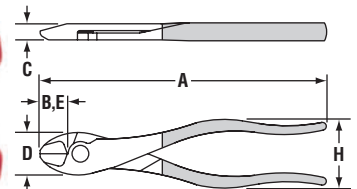

## Features

- High leverage
- Lap joint diagonal cutting plier

PLIER	A OVERALL LENGTH		B JAW LENGTH		C JOINT THICKNESS		D JOINT WIDTH		E CUTTING EDGE		H HANDLE SPAN		WEIGHT	
	in	mm	in	mm	in	mm	in	mm	in	mm	in	mm	pounds	grams
338CB	8.25	209.55	0.79	20.07	0.43	10.92	1.18	29.97	0.79	20.07	2.25	57.15	0.66	299.37

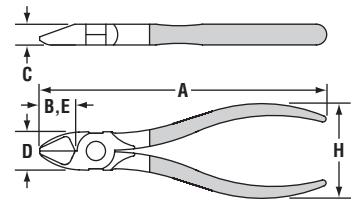

## Features



- Diagonal cutter

PLIER	A OVERALL LENGTH		B JAW LENGTH		C JOINT THICKNESS		D JOINT WIDTH		E CUTTING EDGE		H HANDLE SPAN		WEIGHT	
	in	mm	in	mm	in	mm	in	mm	in	mm	in	mm	pounds	grams
436CB	6.30	160.02	0.75	19.05	0.42	10.67	0.73	18.64	0.75	19.05	2.31	58.67	0.40	181.44

# CODE BLUE® PLIERS

## Features


- Professional welder's pliers
- **XL**™ Xtreme Leverage Technology
- Grooved nose easily removes spatter, grips and draws out wire.
- Installs and removes tips, nozzles, and insulation bushings.
- Coiled spring
- Hammer

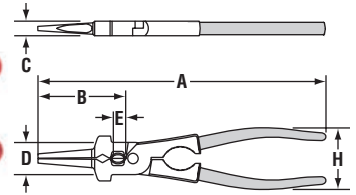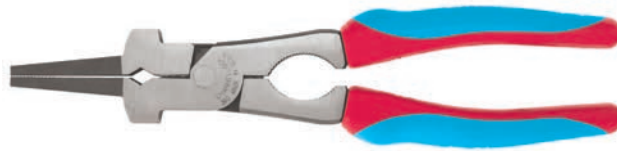

PLIER	A OVERALL LENGTH		B JAW LENGTH		C JOINT THICKNESS		D JOINT WIDTH		E CUTTING EDGE		F NOSE WIDTH		H HANDLE SPAN		WEIGHT	
	in	mm	in	mm	in	mm	in	mm	in	mm	in	mm	in	mm	pounds	grams
360CB	9.00	228.60	2.72	69.04	0.45	11.43	1.50	38.10	0.39	9.93	0.30	7.49	2.00	50.80	0.74	334.75

## Features


- End cutting plier
- Pincès coupantes en bout
- Alicates de corte frontal

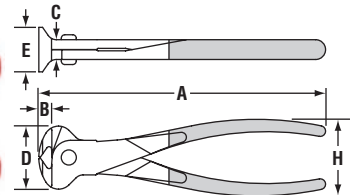

PLIER	A OVERALL LENGTH		B JAW LENGTH		C JOINT THICKNESS		D JOINT WIDTH		E CUTTING EDGE		H HANDLE SPAN		WEIGHT	
	in	mm	in	mm	in	mm	in	mm	in	mm	in	mm	pounds	grams
358CB	8.50	215.90	0.35	8.89	0.49	12.45	1.63	41.40	1.18	29.97	2.25	57.15	0.79	358.34

## Features


- Cable cutter
- Cuts up to 4/0 aluminum and 2/0 copper
- Not for steel or ACSR

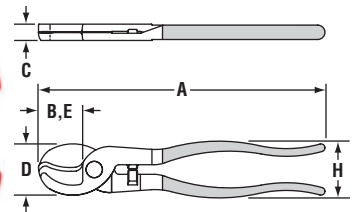

PLIER	A OVERALL LENGTH		B JAW LENGTH		C JOINT THICKNESS		D JOINT WIDTH		E CUTTING EDGE		H HANDLE SPAN		WEIGHT	
	in	mm	in	mm	in	mm	in	mm	in	mm	in	mm	pounds	grams
911CB	9.38	238.25	1.40	35.56	0.51	12.95	1.61	40.89	1.40	35.56	2.00	50.80	0.90	408.23

## Features


- Heavy duty long nose with cutter
- Useful crushing area

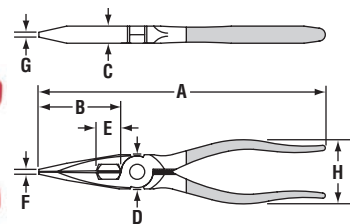

PLIER	A OVERALL LENGTH		B JAW LENGTH		C JOINT THICKNESS		D JOINT WIDTH		E CUTTING EDGE		F NOSE WIDTH		G NOSE THICKNESS		H HANDLE SPAN		WEIGHT	
	in	mm	in	mm	in	mm	in	mm	in	mm	in	mm	in	mm	in	mm	pounds	grams
318CB	8.38	212.85	2.30	58.42	0.50	12.70	1.00	25.40	0.63	16.00	0.16	4.06	0.11	2.79	2.13	54.10	0.59	267.62

## Features

- Crimps and cuts insulated and non-insulated solderless connections and terminals.
- Cuts 10-22 AWG wire

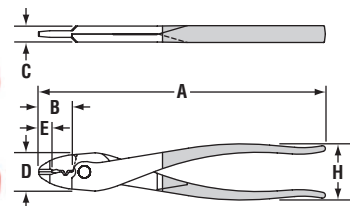

PLIER	A OVERALL LENGTH		B JAW LENGTH		C JOINT THICKNESS		D JOINT WIDTH		E CUTTING EDGE		H HANDLE SPAN		WEIGHT	
	in	mm	in	mm	in	mm	in	mm	in	mm	in	mm	pounds	grams
909CB	9.38	238.25	1.16	29.46	0.48	12.19	1.32	33.53	0.43	10.92	2.13	54.10	0.94	426.38

# E SERIES™

# CHANNEL LOCK

with **XLT™**

**X**TREME  
**L**EVERAGE  
**T**ECHNOLOGY



# E SERIES™ PLIERS

# E SERIES™ PLIERS

## E SERIES™

with **XLT™** XTREME LEVERAGE TECHNOLOGY



Laser heat-treated cutting edges last longer.

Only CHANNELLOCK® uses precision machined knife and anvil style cutting edges to ensure perfect mating and superior cutting edge life.

CHANNELLOCK® uses high carbon C1080 steel for superior performance on the job, and an ultimate rust preventative coating.

**XLT™** Xtreme Leverage Technology means considerably less force required to cut than traditional high leverage designs.



CHANNELLOCK BLUE® and red grips are designed for durability and comfort.


Note: CHANNELLOCK BLUE® and red grips are trademarks of CHANNELLOCK® and are only for comfort. They are NOT recommended or warranted for dielectric properties.

# E SERIES™ PLIERS

## COMBINATION PLIERS

### Features

- **HLT**™ Xtreme Leverage Technology
- Crosshatch jaws for maximum grip
- Pipe grip design accommodates many shapes
- Easily cuts hard and soft wire
- Available in 6, 7, and 8" lengths
- Available with both Plastisol and Code Blue® grips

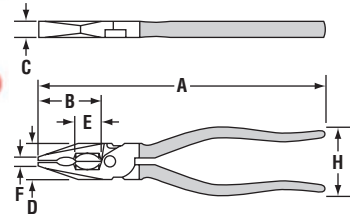


PLIER	A OVERALL LENGTH		B JAW LENGTH		C JOINT THICKNESS		D JOINT WIDTH		E CUTTING EDGE		F NOSE WIDTH		H HANDLE SPAN		WEIGHT	
	in	mm	in	mm	in	mm	in	mm	in	mm	in	mm	in	mm	pounds	grams
<b>E348</b>	8.03	203.99	1.77	44.93	0.45	11.43	1.00	25.40	0.71	17.81	0.26	6.48	2.18	55.37	0.60	272.16
<b>E348CB</b>	8.07	204.98	1.77	44.93	0.45	11.43	1.00	25.40	0.71	17.81	0.26	6.48	2.18	55.37	0.60	272.16
<b>E347</b>	7.03	178.59	1.54	39.12	0.47	11.94	1.00	25.40	0.71	17.81	0.40	10.14	2.17	55.12	0.50	226.80
<b>E347CB</b>	7.19	182.50	1.54	39.12	0.47	11.94	1.00	25.40	0.71	17.81	0.40	10.14	2.17	55.12	0.60	272.16
<b>E346</b>	6.03	153.19	1.18	30.02	0.39	10.01	0.81	20.65	0.35	8.87	0.19	4.72	2.08	52.83	0.30	136.80
<b>E346CB</b>	6.13	155.57	1.18	30.02	0.39	10.01	0.81	20.65	0.35	8.87	0.19	4.72	2.08	52.83	0.40	181.44

## LONG NOSE PLIERS

### Features

- **HLT**™ Xtreme Leverage Technology
- Longer, streamlined design for precision handling
- Crosshatch jaws for maximum gripping
- Pipe grip design accommodates many shapes
- Angle nose designed for unique situations (E388 and E388CB)
- Available with both Plastisol and Code Blue® grips

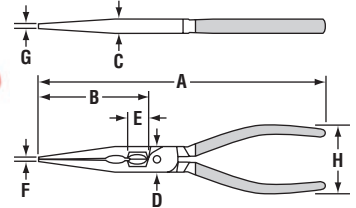


PLIER	A OVERALL LENGTH		B JAW LENGTH		C JOINT THICKNESS		D JOINT WIDTH		E CUTTING EDGE		F NOSE WIDTH		G NOSE THICKNESS		H HANDLE SPAN		WEIGHT	
	in	mm	in	mm	in	mm	in	mm	in	mm	in	mm	in	mm	in	mm	pounds	grams
<b>E318</b>	7.81	198.32	2.96	75.08	0.39	9.91	0.70	17.78	0.46	11.58	0.13	3.18	0.13	3.18	2.14	54.23	0.40	181.44
<b>E318CB</b>	7.86	199.64	2.96	75.08	0.39	9.91	0.70	17.78	0.46	11.58	0.13	3.18	0.13	3.18	2.14	54.23	0.40	181.44
<b>E388</b>	7.45	189.33	2.60	66.09	0.39	9.91	0.70	17.78	0.46	11.58	0.13	3.18	0.13	3.18	2.14	54.23	0.40	181.44
<b>E388CB</b>	7.79	197.74	2.60	66.09	0.39	9.91	0.70	17.78	0.46	11.58	0.13	3.18	0.13	3.18	2.14	54.23	0.40	181.44
<b>E326</b>	6.53	165.89	2.21	56.16	0.39	9.91	0.64	16.26	0.35	8.89	0.11	2.74	0.10	2.41	2.04	51.82	0.30	136.08
<b>E326CB</b>	6.54	165.99	2.21	56.16	0.39	9.91	0.64	16.26	0.35	8.89	0.11	2.74	0.10	2.41	2.04	51.82	0.40	181.44

## DIAGONAL PLIERS

### Features

- **HLT**™ Xtreme Leverage Technology
- Strong lap joint construction
- Durable, diagonal cutting edge design
- Easily cuts hard and soft wire
- Available with both Plastisol and Code Blue® grips

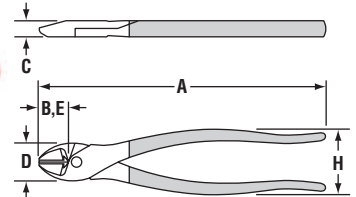

PLIER	A OVERALL LENGTH		B JAW LENGTH		C JOINT THICKNESS		D JOINT WIDTH		E CUTTING EDGE		H HANDLE SPAN		WEIGHT	
	in	mm	in	mm	in	mm	in	mm	in	mm	in	mm	pounds	grams
<b>E338</b>	8.29	210.59	0.86	21.92	0.47	11.94	1.09	27.79	0.86	21.92	2.15	54.61	0.70	317.52
<b>E338CB</b>	8.39	213.11	0.86	21.92	0.47	11.94	1.09	27.79	0.86	21.92	2.15	54.61	0.70	317.52
<b>E337</b>	7.25	184.23	0.86	21.92	0.45	11.43	1.09	27.79	0.86	21.92	2.15	54.61	0.60	272.16
<b>E337CB</b>	7.45	189.10	0.86	21.92	0.45	11.43	1.09	27.79	0.86	21.92	2.15	54.61	0.60	272.16
<b>E336</b>	6.01	152.73	0.56	14.12	0.39	9.91	0.77	19.61	0.56	14.12	2.16	54.86	0.30	136.80
<b>E336CB</b>	6.34	160.91	0.56	14.12	0.39	9.91	0.77	19.61	0.56	14.12	2.16	54.86	0.40	181.44

# GIFT SETS



## GS-1

Set includes:  
426 – 6.5" tongue and groove plier  
420® – 9.5" tongue and groove plier

**NEW**



## GS-1S

Set includes:  
426 – 6.5" tongue and groove plier  
420® – 9.5" tongue and groove plier  
21CB – 2" n 1 screwdriver



## GS-2

Set includes:  
337 – 7" cutting plier  
420® – 9.5" tongue and groove plier



## GS-3

Set includes:  
426 – 6.5" tongue and groove plier  
420® – 9.5" tongue and groove plier  
440® – 12" tongue and groove plier



## GS-3S

Set includes:  
426 – 6.5" tongue and groove plier  
420® – 9.5" tongue and groove plier  
440® – 12" tongue and groove plier  
61CB – 6" n 1 screwdriver



## GS-4

Set includes:  
337 – 7" cutting plier  
3017 – 8" long nose plier  
430® – 10" tongue and groove plier



## GS-6

Set includes:  
337 – 7" cutting plier  
317 – 8" long nose plier  
430® – 10" tongue and groove plier



## AS-1

Set includes:  
447 – 7.75" cutting plier  
410 – 9.5" Nutbuster® tongue and groove plier

# GIFT SETS



## GS-10

Set includes:  
369 – 9.5" line men's plier  
430® – 10" tongue and groove plier

**NEW**



## GS-10CB

Set includes:  
369CB – 9.5" Code Blue® linemen's plier  
430CB – 10.5" Code Blue® tongue and groove



## TG-1

Set includes:  
420® – 9.5" tongue and groove plier  
440® – 12" tongue and groove plier



## GLS-1

Set includes:  
GL10 – 9.5" Griplock® tongue and groove plier  
GL12 – 12.5" Griplock® tongue and groove plier



## GLS-2

Set includes:  
GL6 – 6.5" Griplock® tongue and groove plier  
GL10 – 9.5" Griplock® tongue and groove plier



## GLS-3

Set includes:  
GL6 – 6.5" Griplock® tongue and groove plier  
GL10 – 9.5" Griplock® tongue and groove plier  
GL12 – 12.5" Griplock® tongue and groove plier



## WS-2

Set includes:  
806W – 6.25" adjustable wrench  
810W – 10" adjustable wrench



## WS-2CB

Set includes:  
806WCB – 6.25" Code Blue® adjustable wrench  
810WCB – 10" Code Blue® adjustable wrench

# GIFT SETS



## VJ-1

Set includes:  
412 – 6.5" v-jaw tongue and groove plier  
422 – 9.5" v-jaw tongue and groove plier



## VJ-1S

Set includes:  
412 – 6.5" v-jaw tongue and groove plier  
422 – 9.5" v-jaw tongue and groove plier  
21CB – 2" x 1 screwdriver



## VJ-2

Set includes:  
412 – 6.5" v-jaw tongue and groove plier  
432 – 10" v-jaw tongue and groove plier



## VJ-3

Set includes:  
412 – 6.5" v-jaw tongue and groove plier  
422 – 9.5" v-jaw tongue and groove plier  
442 – 12" v-jaw tongue and groove plier

**NEW**



## GS-29

Set includes:  
528 – 8" slip joint plier  
440® – 12" tongue and groove plier

**NEW**



## OF-2

Set includes:  
209 – 9" oil filter plier  
212 – 12" oil filter plier



## OF-1

Set includes:  
212 – 12" oil filter plier  
215 – 15.5" oil filter plier

# GIFT SETS

**NEW**



**SD-10A**

Professional screwdrivers included:  
 P103A – #1x3" phillips, P106A – #1x6" phillips,  
 P204A – #2x4" phillips, P206A – #2x6" phillips,  
 P306A – #3x6" phillips, S363A – 3/16"x3" slotted,  
 S366A – 3/16"x6" slotted, S144A – 1/4"x4" slotted,  
 S146A – 1/4"x6" slotted, S566A – 5/16"x6" slotted

**NEW**



**SD-6A**

Professional screwdrivers included:  
 P103A – #1x3" phillips, P204A – #2x4" phillips,  
 P206A – #2x6" phillips, S363A – 3/16"x3" slotted,  
 S144A – 1/4"x4" slotted, S146A – 1/4"x6" slotted

**NEW**



**SD-5A**

Precision professional screwdrivers included:  
 P000A – #000x1-1/2" phillips  
 P002A – #00x2" phillips  
 P021A – #0x2-1/2" phillips  
 S182A – 1/8"x2-1/4" slotted  
 S332A – 3/32"x2" slotted

**NEW**



**ND-7A**

Professional hollow shaft nut drivers included:  
 N316A – 3/16", N140A – 1/4", N516A – 5/16",  
 N132A – 11/32", N380A – 3/8", N716A – 7/16",

**NEW**



**TS-5A**

Torx® professional screwdrivers included:  
 T103A – T10x3", T153A – T15x3",  
 T203A – T20x3", T253A – T25x3",  
 T304A – T30x4"

**NEW**



**TP-5A**

Precision Torx® professional screwdrivers included:  
 T051A – T5x1-1/2", T062A – T6x2",  
 T072A – T7x2", T082A – T8x2-1/2",  
 T092A – T9x2-1/2"


**NEW**



**HP-4A**

Set includes:  
 AWL2A – 2" professional round awl screwdriver  
 A902A – small 90° pick  
 A180A – small 180° hook  
 APRBA – small complex probe

# GIFT SETS

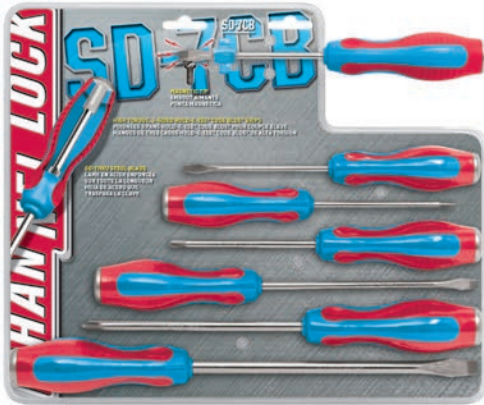

## SD-7CB

Code Blue® screwdrivers included:  
 S144CB – 1/4"x4" slotted, S146CB – 1/4"x6" slotted, S364CB – 3/16"x4" slotted,  
 S388CB – 3/8"x8" slotted, P104CB – #1x4" phillips, P204CB – #2x4" phillips,  
 P306CB – #3x6" phillips



## ND-7CB

Code Blue® hollow shaft nut drivers included:  
 N316CB-3/16", N140CB-1/4", N516CB-5/16", N132CB-11/32",  
 N380CB – 3/8", N716CB – 7/16", N120CB – 1/2"

## MD-7CB

Code Blue® hollow shaft nut drivers included:  
 5 mm, 6 mm, 7 mm, 8 mm, 9 mm, 10 mm, 11 mm



## PC-1

Pro's Choice  
 Set includes: 424, 426, 440®, 460 tongue and groove pliers  
 packaged in a foam tray.



## PC-2

Pro's Choice II  
 Set includes: 420® tongue and groove plier, 337 cutting plier,  
 317 long nose plier, 548 slip joint plier packaged in a foam tray.

**NEW**



## PC-3

Pro's Choice III  
 Set includes: 426, 440®, 460, 480 tongue and groove pliers  
 packaged in a foam tray.

# GIFT SETS



## GP-7

Tool roll includes: 420® tongue and groove plier, 61CB Code Blue® screwdriver, 4 26 tongue and groove plier, 806W adjustable wrench, 436 diagonal cutter, 326 long nose plier



## TOOL ROLL-1

Tool roll includes: 420® tongue and groove plier, 909 crimping and cutting tool, 447 diagonal cutter, 317 long nose plier, 526 slip joint plier



## TOOL ROLL-2

Tool roll includes: 420® tongue and groove plier, 909 crimping and cutting tool, 447 diagonal cutter, 317 long nose plier, 426 tongue and groove plier



## TOOL ROLL-3

Tool roll includes: 430® tongue and groove plier, 420® tongue and groove plier, 337 cutting plier, 3017 long nose plier, 526 slip joint plier



## TOOL ROLL-4

Tool roll includes: 430® tongue and groove plier, 420® tongue and groove plier, 337 cutting plier, 3017 long nose plier, 61CB Code Blue® screwdriver



Not an ISO Certified Product.

## RT-3

Set includes: 926 – 6.25" retaining ring plier, 927 – 8" retaining ring plier, 929 – 10" retaining ring plier

# GIFT SETS



## TOOL ROLL-8

Tool roll includes: 317 long nose plier, 337 cutting plier, 426 tongue and groove plier, 8WCB Code Blue® adjustable wrench, 420® tongue and groove plier, 369 linemen's plier, 357 end cutting plier/nipper, 440® tongue and groove plier



## CBR-5

5 piece Code Blue® tool roll includes: 430CB tongue and groove plier, 369CB linemen's plier, 8WCB adjustable wrench, 338CB cutting plier, 318CB long nose plier

## CBR-5A

5 piece Code Blue® tool roll includes: 430CB tongue and groove plier, 369CRFTCB linemen's plier, 8WCB adjustable wrench, 338CB cutting plier, 318CB long nose plier



## TOOL ROLL-5E

Tool roll includes: GL10 Griplock® tongue and groove plier, E338 cutting plier, 358 cutting plier, E348 linemen's plier, E318 long nose plier



## CBR-5E

5 piece Code Blue® tool roll includes: GL10CB Griplock® tongue and groove plier, 358CB cutting plier, E348CB linemen's plier, E338CB cutting plier, E318CB long nose plier



## CBR-8

8 piece Code Blue® tool roll includes: 430CB tongue and groove plier, 420CB tongue and groove plier, 369CB linemen's plier, 911CB cable cutter, 909CB crimping and cutting tool, 358CB cutting plier, 318CB long nose plier, 338CB cutting plier



## CBR-8A

8 piece Code Blue® tool roll includes: 430CB tongue and groove plier, 420CB tongue and groove plier, 369CRFTCB linemen's plier, 318CB long nose plier, 358CB cutting plier, 338CB cutting plier, 8WCB adjustable wrench, 61CB screwdriver