


CORDLESS POWER TOOLS

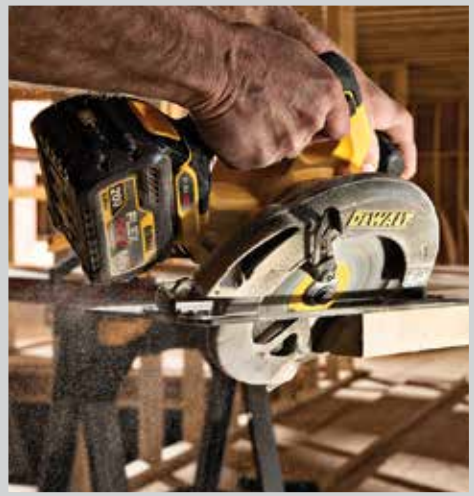

DEWALT[®]

TM

20V ^{MAX*}
LITHIUM ION

GET MORE DONE. ^{TM†}



100+
PRODUCTS

**OUR
FASTEST GROWING
SYSTEM**

†DeWALT 20V MAX* vs. DeWALT 18V NiCad. *Maximum initial battery voltage (measured without a workload) is 20 volts. Nominal voltage is 18.

THE FLEXVOLT® ADVANTAGE

The FLEXVOLT® system brings you the future of power with cordless tools unlike anything you've ever experienced. With a highly innovative voltage-changing battery and a lineup of groundbreaking 60V MAX* and 120V MAX* tools to match, FLEXVOLT® tools have the power that will change the way work gets done.

 <p>FLEXVOLT® BATTERIES</p>	 <p>FLEXVOLT® TOOLS</p>	 <p>FLEXVOLT® ACCESSORIES</p>
<p>The World's First Batteries That Automatically Change Voltage When You Change Tools. Works with 20V MAX*, 60V MAX* and 120V MAX* Tools.</p>	<p>60V LITHIUM ION</p> <p>120V LITHIUM ION</p> <p>Brings Power to a Whole New Lineup of Tools</p> <p>Combine Two 60V MAX* Batteries for Revolutionary Cordless Freedom</p>	<p>FLEXVOLT HIGH EFFICIENCY ACCESSORIES® Are Engineered to Maximize Runtime in Cordless Tools.</p>

60V MAX* and 120V MAX* LINE-UP



See page 16



See page 14



See page 19



See page 19



See page 17



See page 25



See page 15



See page 69



See page 68



See page 68

20V MAX* TOOL KITS with FLEXVOLT® BATTERIES



See page 32



See page 29



See page 27



See page 14

Maximum initial battery voltage (measured without a workload) is 20, 60 and 120 volts. Nominal voltage is 18, 54, and 108. 120V MAX is based on using 2 DeWALT 60V MAX* lithium-ion batteries combined.



TAKE CONTROL WITH TOOL CONNECT™



Tools, Tag, Connector and batteries with integrated Bluetooth® technology seamlessly pair with your Tool Connect™ app.

4 WAYS TO CONNECT

TAG

Track anything on the jobsite



CONNECTOR

Track your 20V MAX* Tools**



TOOLS

Integrated Bluetooth® Technology



BATTERIES

Customize. Track. Manage.™



INVENTORY MANAGEMENT

Track tools, equipment and materials across multiple jobsites from one central location.



FIND & LOCATE

Instantly see who was last assigned to a connected asset and where it was.



CUSTOMIZE SETTINGS

Customize settings like light brightness, speed, and alerts using the mobile app.



MONITOR DIAGNOSTICS

From battery status to operating temperature, get real-time diagnostics.



ENABLE & DISABLE

Disable tools or batteries when out-of-range to help deter theft.




OUT-OF-RANGE ALERTS

Set a virtual fence and get alerts when tracked tools, equipment or materials are removed.

TOOL CONNECT™ INVENTORY MANAGER WEB PORTAL

www.DEWALT.com/tc

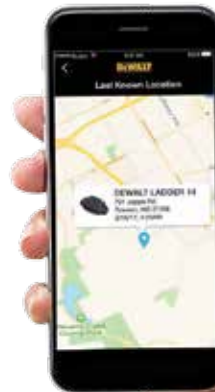

DOWNLOAD THE APP TODAY!



The Bluetooth® word mark and logos are registered trademarks owned by the Bluetooth SIG, Inc. and any use of such marks by DeWALT® is under license. Other trademarks and tradenames are those of their respective owners. **Excluding DeWALT devices that charge and DeWALT adaptors.

HAMMER DRILLS



20V MAX* XR® Tool Connect™ 3-Speed Hammerdrill Kit (with Tool Connect™ Batteries)



20V MAX* XR® Tool Connect™ 3-Speed Hammerdrill (Tool Only)



20V MAX* XR® Brushless 3-Speed Hammerdrill Kit



20V MAX* XR® Brushless 3-Speed Hammerdrill Kit (Tool Only)

SPECIFICATIONS	DCD997P2BT	DCD997B	DCD996P2	DCD996B
Volts	20V MAX*	20V MAX*	20V MAX*	20V MAX*
Max Power	820 UWO	820 UWO	820 UWO	820 UWO
# of Speed Settings	3	3	3	3
Max RPM	0-500 / 0-1,500 / 0-2,250 rpm	0-500 / 0-1,500 / 0-2,250 rpm	0-500 / 0-1,500 / 0-2,250 rpm	0-500 / 0-1,500 / 0-2,250 rpm
Max BPM	0-38,250 bpm	0-38,250 bpm	0-38,250 bpm	0-38,250 bpm
Chuck Size	1/2"	1/2"	1/2"	1/2"
Chuck Type	Metal, ratcheting	Metal, ratcheting	Metal, ratcheting	Metal, ratcheting
Weight	4.7 lbs	3.34 lbs	4.7 lbs	3.34 lbs
Charger/Batteries	Charger / (2) 20V Max* Tool Connect™ XR Lithium Ion (5.0 Ah)	Sold Separately	Charger / (2) 20V MAX* XR Lithium Ion (5.0 Ah)	Sold Separately
Includes	360° side handle, belt hook	360° side handle, belt hook	360° side handle, belt hook	360° side handle, belt hook



20V MAX* 3-Speed Hammerdrill Kit



20V MAX* 3-Speed Hammerdrill (Tool Only)



18V XRP™ 1/2" (13 mm) Hammerdrill/Drill/Driver Kit



20V MAX* XR® Brushless Tool Connect™ Compact Hammerdrill Kit

SPECIFICATIONS	DCD985M2	DCD985B	DCD970KL	DCD797D2
Volts	20V MAX*	20V MAX*	18V	20V MAX*
Max Power	535 UWO	535 UWO	450 UWO	460 UWO
# of Speed Settings	3	3	3	2
Max RPM	0-575 / 0-1,350 / 0-2,000 rpm	0-575 / 0-1,350 / 0-2,000 rpm	0-500 / 0-1,250 / 0-2,000 rpm	0-550 / 0-2,000 rpm
Max BPM	0-9,775 / 0-22,950 / 0-34,000 bpm	0-9,775 / 0-22,950 / 0-34,000 bpm	0-8,500 / 0-21,250 / 0-34,000 bpm	0-34,000 bpm
Chuck Size	1/2"	1/2"	1/2"	1/2"
Chuck Type	Metal, ratcheting	Metal, ratcheting	Metal, ratcheting	Metal, ratcheting
Weight	5.2 lbs	3.9 lbs	5.2 lbs	2.8 lbs
Charger/Batteries	Charger / (2) 20V MAX* XR Lithium Ion (4.0 Ah)	Sold Separately	Nicd/NiMH/Li-Ion charger / (2) 18V XRP™ Lithium Ion	Charger / (2) 20V Max* XR Lithium Ion (2.0 Ah)
Includes	360° side handle	360° side handle	360° side handle	Belt hook



20V MAX* XR® Brushless Tool Connect™ Compact Hammerdrill (Tool Only)



20V MAX* XR® Brushless Compact Hammerdrill Kit



20V MAX* XR® Brushless Compact Hammerdrill (Tool Only)



20V MAX* Compact Hammerdrill Kit



18V XRP™ 1/2" (13 mm) Hammerdrill/Drill/Driver Kit

SPECIFICATIONS	DCD797B	DCD796D2	DCD796B	DCD785C2	DCD959KX
Volts	20V MAX*	20V MAX*	20V MAX*	20V MAX*	18V
Max Power	460 UWO	460 UWO	460 UWO	350 UWO	420 UWO
# of Speed Settings	2	2	2	2	3
Max RPM	0-550 / 0-2,000 rpm	0-550 / 0-2,000 rpm	0-550 / 0-2,000 rpm	0-600 / 2,000 rpm	0-450 / 0-1,450 / 0-2,000 rpm
Max BPM	0-34,000 bpm	0-9,350 / 0-34,000 bpm	0-9,350 / 0-34,000 bpm	0-10,200 / 0-34,000 bpm	0-7,650 / 0-24,650 / 0-34,000 bpm
Chuck Size	1/2"	1/2"	1/2"	1/2"	1/2"
Chuck Type	Metal, ratcheting	Metal, ratcheting	Metal, ratcheting	Ratcheting	Metal, ratcheting
Weight	2.0 lbs	3.6 lbs	2.8 lbs	3.5 lbs	6.0 lbs
Charger/Batteries	Sold Separately	Charger / (2) 20V MAX* XR Lithium Ion (2.0 Ah)	Sold Separately	Charger / (2) 20V MAX* Lithium Ion (1.5 Ah)	Charger / (2) 18V XRP™
Includes	Belt hook	Belt hook	Belt hook	Belt hook	360° side handle

HAMMER DRILLS



18V XRP™ 1/2" (13 mm) Hammerdrill/Drill/Driver Kit **18V XRP™ 1/2" (13 mm) Hammerdrill/Drill/Driver (Tool Only)** **18V Compact 1/2" (13 mm) Hammerdrill Kit** **18V Compact 1/2" (13 mm) Hammerdrill (Tool Only)** **18V Compact 1/2" (13 mm) Hammerdrill Kit**

SPECIFICATIONS	DCD950KX	DCD950B	DCD775KL	DCD775B	DC725KA
Volts	18V	18V	18V	18V	18V
Max Power	450 UWO	450 UWO	350 UWO	350 UWO	410 UWO
# of Speed Settings	3	3	2	2	2
Max RPM	0-500 / 0-1,250 / 0-2,000 rpm	0-500 / 0-1,250 / 0-2,000 rpm	0-500 / 0-1,700 rpm	0-500 / 0-1,700 rpm	0-500 / 0-1,700 rpm
Max BPM	0-8,500 / 0-21,250 / 0-34,000 bpm	0-8,500 / 0-21,250 / 0-34,000 bpm	0-8,500 / 0-29,000 bpm	0-8,500 / 0-29,000 bpm	0-8,500 / 0-29,000 bpm
Chuck Size	1/2"	1/2"	1/2"	1/2"	1/2"
Chuck Type	Metal, ratcheting	Metal, ratcheting	Metal, ratcheting	Metal, ratcheting	Metal, ratcheting
Weight	6.2 lbs	3.9 lbs	4.1 lbs	3.1 lbs	4.9 lbs
Charger/Batteries	Charger / (2) 18V XRP™	Sold Separately	Charger / (2) 18V Compact Lithium Ion	Sold Separately	Charger / (2) 18V
Includes	360° side handle	360° side handle	360° side handle, belt hook	360° side handle	360° side handle

DRILL / DRIVERS



20V MAX* XR® 3-Speed Drill/Driver Kit **20V MAX* XR® 3-Speed Drill/Driver Kit** **20V MAX* 3-Speed Drill/Driver Kit** **18V XRP™ 1/2" (13 mm) Drill/Driver Kit** **18V XRP™ 1/2" (13 mm) Drill/Driver Kit**

SPECIFICATIONS	DCD991P2	DCD991B	DCD980M2	DCD960KL	DCD940KX
Volts	20V MAX*	20V MAX*	20V MAX*	18V	18V
Max Power	820 UWO	820 UWO	535 UWO	450 UWO	450 UWO
# of Speed Settings	3	3	3	3	3
Max RPM	0-450 / 0-1,300 / 0-2,000 rpm	0-450 / 0-1,300 / 0-2,000 rpm	0-575 / 0-1,350 / 0-2,000 rpm	0-500 / 0-1,250 / 0-2,000 rpm	0-500 / 0-1,250 / 0-2,000 rpm
Chuck Size	1/2"	1/2"	1/2"	1/2"	1/2"
Chuck Type	Metal, ratcheting	Metal, ratcheting	Metal, ratcheting	Metal, ratcheting	Metal, ratcheting
Weight	4.6 lbs	3.8 lbs	5.2 lbs	5.2 lbs	6.2 lbs
Charger/Batteries	Charger / (2) 20V MAX* XR Lithium Ion (5.0 Ah)	Sold Separately	Charger / (2) 20V MAX* XR Lithium Ion (4.0 Ah)	NiCd/NiMH/Li-Ion Charger / (2) 18V XRP™ Lithium Ion	Charger / (2) 18V XRP™
Includes	On-board bit tip holder & belt hook and 360° side handle	On-board bit tip holder & belt hook and 360° side handle	360° side handle	360° side handle	360° side handle



20V Max* XR® Tool Connect™ Compact Drill/Driver Kit **20V Max* XR® Tool Connect™ Compact Drill/Driver (Tool Only)** **20V MAX* XR® Brushless Compact Drill/Driver Kit** **20V MAX* XR® Brushless Compact Drill/Driver (Tool Only)**

SPECIFICATIONS	DCD792D2	DCD792B	DCD791D2	DCD791B
Volts	20V MAX*	20V MAX*	20V MAX*	20V MAX*
Max Power	460 UWO	460 UWO	460 UWO	460 UWO
# of Speed Settings	2	2	2	2
Max RPM	0-550/0-2,000 RPM	0-550/0-2,000 rpm	0-600 / 0-2,000 rpm	0-600 / 0-2,000 rpm
Chuck Size	1/2"	1/2"	1/2"	1/2"
Chuck Type	Metal, ratcheting	Metal, ratcheting	Metal, ratcheting	Metal, ratcheting
Weight	3.4 lbs	3.4 lbs	3.4 lbs	3.4 lbs
Charger/Batteries	Charger / (2) 20V MAX* XR Lithium Ion (2.0 Ah)	Sold Separately	Charger / (2) 20V MAX* XR Lithium Ion (2.0 Ah)	Sold Separately
Includes	360° side handle	360° side handle	Belt hook	Belt hook

DRILL/DRIVERS



20V MAX* Compact Drill/Driver Kit



20V MAX* Compact Drill/Driver (Tool Only)



20V MAX* 3/8" (9.5 mm) Right Angle Drill/Driver Kit



20V MAX* 3/8" (9.5 mm) Right Angle Drill/Driver (Tool Only)

SPECIFICATIONS	DCD780C2	DCD780B	DCD740C1	DCD740B
Volts	20V MAX*	20V MAX*	20V MAX*	20V MAX*
Max Power	350 UWO	350 UWO	360 UWO	360 UWO
# of Speed Settings	2	2	2	2
Max RPM	0-600 / 2,000 rpm	0-600 / 2,000 rpm	0-650 / 0-2,000 rpm	0-650 / 0-2,000 rpm
Chuck Size	1/2"	1/2"	3/8"	3/8"
Chuck Type	Ratcheting	Ratcheting	Plastic, ratcheting	Plastic, ratcheting
Weight	3.4 lbs	2.7 lbs	3.8 lbs	3.0 lbs
Charger/Batteries	Charger / (2) 20V MAX* Lithium Ion (1.5 Ah)	Sold Separately	Charger / (1) 20V MAX* Lithium Ion (1.5 Ah)	Sold Separately
Includes	Belt hook	Belt hook	Belt hook & 2" Phillips bit tip	Belt hook & 2" Phillips bit tip



18V Compact 1/2" (13 mm) Drill/Driver Kit



18V Compact 1/2" (13 mm) Drill/Driver (Tool Only)



18V Compact 1/2" (13 mm) Drill/Driver Kit



14.4V XRP™ 1/2" (13 mm) Drill/Driver Kit

SPECIFICATIONS	DCD760KL	DCD760B	DC720KA	DCD920KX
Volts	18V	18V	18V	14.4V
Max Power	350 UWO	350 UWO	410 UWO	325 UWO
# of Speed Settings	2	2	2	3
Max RPM	0-500 / 0-1,700 rpm	0-500 / 0-1,700 rpm	0-500 / 0-1,700 rpm	0-425 / 0-1,200 / 0-1,800 rpm
Chuck Size	1/2"	1/2"	1/2"	1/2"
Chuck Type	Plastic, ratcheting	Plastic, ratcheting	Plastic, ratcheting	Metal, ratcheting
Weight	4.0 lbs	3.0 lbs	4.8 lbs	5.7 lbs
Charger/Batteries	Charger, (2) 18V Compact Lithium Ion	Sold Separately	Charger / (2) 18V	Charger / (2) 14.4V XRP™



14.4V Compact 1/2" (13 mm) Drill/Driver Kit



12V MAX* 3/8" (10 mm) Drill/Driver Kit



12V XRP™ 1/2" (13 mm) Drill/Driver Kit



12V Compact 3/8" (10 mm) Drill/Driver Kit



9.6V Compact 3/8" (10 mm) Drill/Driver Kit

SPECIFICATIONS	DC730KA	DCD710S2	DCD910KX	DC742KA	DC750KA
Volts	14.4V	12V MAX*	12V	12V	9.6V
Max Power	300 UWO	189 UWO	285 UWO	200 UWO	130 UWO
# of Speed Settings	2	2	3	3	2
Max RPM	0-400 / 0-1,450 rpm	0-400 / 0-1,500 rpm	0-425 / 0-1,200 / 0-1,800 rpm	0-400 / 0-1,450 rpm	0-300 / 0-1,100 rpm
Chuck Size	1/2"	3/8"	1/2"	3/8"	3/8"
Chuck Type	Plastic, ratcheting	Plastic, ratcheting	Metal, ratcheting	Plastic, ratcheting	Plastic, ratcheting
Weight	4.3 lbs	2.4 lbs	5.2 lbs	3.8 lbs	3.4 lbs
Charger/Batteries	Charger / (2) 14.4V	Charger / (2) 12V MAX* Lithium Ion	Charger / (2) 12V XRP™	Charger / (2) 12V	Charger / (2) 9.6V
Includes	-	Belt hook	-	-	-

IMPACT DRIVERS



20V MAX* XR® Brushless Tool Connect™ Impact Driver Kit (with Tool Connect™ Batteries)



20V MAX* XR® Brushless Tool Connect™ Impact Driver (Tool Only)



20V MAX* XR® 1/4" 3-Speed Impact Driver Kit



20V MAX* XR® 1/4" 3-Speed Impact Driver (Tool Only)

SPECIFICATIONS

	DCF888P2BT	DCF888B	DCF887M2	DCF887D2
Volts	20V MAX*	20V MAX*	20V MAX*	20V MAX*
Drive Size	1/4" Quick Release Hex Shank	1/4" Quick Release Hex Shank	1/4" Hex Shank Quick Release	1/4" Hex Shank Quick Release
No Load Speed	0-3,250 rpm	0-3,250 rpm	0-1,000 / 2,800 / 3,250 rpm	0-1,000 / 2,800 / 3,250 rpm
Impacts/Min	0-3,600 ipm	0-3,600 ipm	3,600 ipm	3,600 ipm
Max Torque (in-lbs)	0-1,825 in-lbs	0-1,825 in-lbs	240 / 1,500 / 1,825 in-lbs	240 / 1,500 / 1,825 in-lbs
Max Torque (ft-lbs)	152 ft-lbs	152 ft-lbs	20 / 125 / 152 ft-lbs	20 / 125 / 152 ft-lbs
Tool Length	5.3"	5.3"	5.3"	5.3"
LEDs	3	3	3	3
Weight	2.8 lbs	2.0 lbs	3.4 lbs	2.8 lbs
Charger/Batteries	Charger / (2) 20V MAX* Tool Connect™ XR Lithium Ion (5.0 Ah)	Sold Separately	Charger / (2) 20V MAX* XR Lithium Ion (4.0 Ah)	Charger / (2) 20V MAX* XR Lithium Ion (2.0 Ah)
Includes	Belt hook	Belt hook	Belt hook	Belt hook



20V MAX* XR® 1/4" 3-Speed Impact Driver Kit (Tool Only)



20V MAX* 1/4" (6.35 mm) Impact Driver Kit



20V MAX* 1/4" (6.35 mm) Impact Driver Kit



20V MAX* 1/4" (6.35 mm) Impact Driver (Tool Only)

SPECIFICATIONS

	DCF887B	DCF885M2	DCF885C2	DCF885B
Volts	20V MAX*	20V MAX*	20V MAX*	20V MAX*
Drive Size	1/4" Hex Shank Quick Release	1/4" Hex Shank Quick Release	1/4" Hex Shank Quick Release	1/4" Hex Shank Quick Release
No Load Speed	0-1,000 / 2,800 / 3,250 rpm	2,800 rpm	2,800 rpm	2,800 rpm
Impacts/Min	3,600 ipm	3,200 ipm	3,200 ipm	3,200 ipm
Max Torque (in-lbs)	1,825 in-lbs	1,400 in-lbs	1,400 in-lbs	1,400 in-lbs
Max Torque (ft-lbs)	152 ft-lbs	117 ft-lbs	117 ft-lbs	117 ft-lbs
Tool Length	5.3"	5.5"	5.5"	5.5"
LEDs	3	3	3	3
Weight	2.0 lbs	3.4 lbs	2.8 lbs	2.0 lbs
Charger/Batteries	Sold Separately	Charger / (2) 20V MAX* XR Lithium Ion (4.0 Ah)	Charger / (2) 20V MAX* Lithium Ion (1.5 Ah)	Sold Separately
Includes	Belt hook	Belt hook	Belt hook	Belt hook



18V XRP™ 1/4" (6.35 mm) Impact Driver Kit



18V 1/4" (6.35 mm) Impact Driver (Tool Only)



12V MAX* 1/4" (6.35 mm) Impact Driver Kit

SPECIFICATIONS

	DC825KA	DC825B	DCF815S2
Volts	18V	18V	12V MAX*
Drive Size	1/4" Hex Shank Quick Release	1/4" Hex Shank Quick Release	1-Handed loading, 1/4" hex chuck
No Load Speed	0-2,400 rpm	0-2,400 rpm	0-2,450 rpm
Impacts/Min	0-2,700 ipm	0-2,700 ipm	0-3,400 ipm
Max Torque (in-lbs)	1,330 in-lbs	1,330 in-lbs	950 in-lbs
Max Torque (ft-lbs)	111 ft-lbs	111 ft-lbs	79 ft-lbs
Tool Length	5-3/4"	5-3/4"	6-1/4"
LEDs	1	1	3
Weight	4.6 lbs	2.2 lbs	2.3 lbs
Charger/Batteries	Charger / (2) 18V XRP™	Sold Separately	Charger / (2) 12V MAX* Lithium Ion
Includes	-	-	Belt hook



IMPACT WRENCHES



20V MAX* XR[®] High Torque 1/2" Impact Wrench with Hog Ring Anvil Kit



20V MAX* XR[®] High Torque 1/2" Impact Wrench with Hog Ring Anvil (Tool Only)



20V MAX* XR[®] High Torque 1/2" Impact Wrench with Detent Pin Anvil Kit



20V MAX* XR[®] High Torque 1/2" Impact Wrench with Detent Pin Anvil (Tool Only)

SPECIFICATIONS	DCF899HP2	DCF899HB	DCF899P2	DCF899B
Volts	20V MAX*	20V MAX*	20V MAX*	20V MAX*
Drive Size	1/2" Square w/ Hog Ring Anvil	1/2" Square w/ Hog Ring Anvil	1/2" Square w/ Detent Pin Anvil	1/2" Square w/ Detent Pin Anvil
Max Torque (in-lbs)	1,200 / 3,600 / 8,400 in-lbs	1,200 / 3,600 / 8,400 in-lbs	1,200 / 3,600 / 8,400 in-lbs	1,200 / 3,600 / 8,400 in-lbs
Max Torque (ft-lbs)	100 / 300 / 700 ft-lbs	100 / 300 / 700 ft-lbs	100 / 300 / 700 ft-lbs	100 / 300 / 700 ft-lbs
No Load Speed	0-400 / 1,200 / 1,900 rpm	0-400 / 1,200 / 1,900 rpm	0-400 / 1,200 / 1,900 rpm	0-400 / 1,200 / 1,900 rpm
Impacts/Minute	0-2,400 ipm	0-2,400 ipm	0-2,400 ipm	0-2,400 ipm
LEDs	1	1	1	1
Weight	7.2 lbs	5.8 lbs	7.2 lbs	5.8 lbs
Tool Length	8-13/16"	8-13/16"	8-13/16"	8-13/16"
Charger/Batteries	Charger / (2) 20V MAX* XR Lithium Ion (5.0 Ah)	Sold Separately	Charger / (2) 20V MAX* XR Lithium Ion (5.0 Ah)	Sold Separately



20V MAX* XR[®] High Torque 7/16" Impact Wrench with Quick Release Chuck Kit



20V MAX* XR[®] High Torque 7/16" Impact Wrench with Quick Release Chuck (Tool Only)



20V MAX* XR[®] High Torque 3/4" Impact Wrench with Hog Ring Retention Pin Anvil Kit



20V MAX* XR[®] High Torque 3/4" Impact Wrench with Hog Ring Retention Pin Anvil (Tool Only)

SPECIFICATIONS	DCF898P2	DCF898B	DCF897P2	DCF897B
Volts	20V MAX*	20V MAX*	20V MAX*	20V MAX*
Drive Size	7/16" Quick Release Hex Shank	7/16" Quick Release Hex Shank	3/4" Hog Ring Retention Pin Anvil	3/4" Hog Ring Retention Pin Anvil
Max Torque (in-lbs)	1,200 in-lbs / 3,600 in-lbs / 6,000 in-lbs	1,200 in-lbs / 3,600 in-lbs / 6,000 in-lbs	1,200 in-lbs / 3,600 in-lbs / 8,400 in-lbs	1,200 in-lbs / 3,600 in-lbs / 8,400 in-lbs
Max Torque (ft-lbs)	100 ft-lbs / 300 ft-lbs / 500 ft-lbs	100 ft-lbs / 300 ft-lbs / 500 ft-lbs	100 ft-lbs / 300 ft-lbs / 700 ft-lbs	100 ft-lbs / 300 ft-lbs / 700 ft-lbs
No Load Speed	0-400 / 1,200 / 1,900 rpm	0-400 / 1,200 / 1,900 rpm	0-400 / 1,200 / 1,900 rpm	0-400 / 1,200 / 1,900 rpm
Impacts/Minute	0-2,400 ipm	0-2,400 ipm	0-2,400 ipm	0-2,400 ipm
LEDs	1	1	1	1
Weight	7.2 lbs	5.8 lbs	7.2 lbs	5.8 lbs
Tool Length	8-13/16"	8-13/16"	8-13/16"	8-13/16"
Charger/Batteries	Charger / (2) 20V MAX* XR Lithium Ion (5.0 Ah)	Sold Separately	Charger / (2) 20V MAX* XR Lithium Ion (5.0 Ah)	Sold Separately



20V MAX* XR[®] Brushless 3/8" Compact Impact Wrench Kit



20V MAX* XR[®] Brushless 3/8" Compact Impact Wrench (Tool Only)



20V MAX* 1/2" (13 mm) Impact Wrench Kit with Detent Pin Anvil



20V MAX* 1/2" (13 mm) Impact Wrench with Detent Pin Anvil (Tool Only)

SPECIFICATIONS	DCF890M2	DCF890B	DCF889M2	DCF889B
Volts	20V MAX*	20V MAX*	20V MAX*	20V MAX*
Drive Size	3/8" Square w/ Hog Ring Anvil	3/8" Square w/ Hog Ring Anvil	1/2" Square w/ detent pin anvil	1/2" Square w/ detent pin anvil
Max Torque (in-lbs)	1,800 in-lbs	1,800 in-lbs	4,800 in-lbs	4,800 in-lbs
Max Torque (ft-lbs)	150 ft-lbs	150 ft-lbs	400 ft-lbs	400 ft-lbs
No Load Speed	0-2,800 rpm	0-2,800 rpm	0-1,500 rpm	0-1,500 rpm
Impacts/Minute	0-3,200 ipm	0-3,200 ipm	0-2,300 ipm	0-2,300 ipm
LEDs	3	3	1	1
Weight	2.8 lbs	2 lbs	6.7 lbs	5.3 lbs
Tool Length	5-1/2"	5-1/2"	10-3/4"	10-3/4"
Charger/Batteries	Charger / (2) 20V MAX* XR Lithium Ion (4.0 Ah)	Sold Separately	Charger / (2) 20V MAX* XR Lithium Ion (4.0 Ah)	Sold Separately

IMPACT WRENCHES



20V MAX* 1/2" (13 mm) Impact Wrench Kit with Hog Ring Anvil



20V MAX* 1/2" (13 mm) Impact Wrench Kit with Detent Pin



20V MAX* 1/2" (13 mm) Impact Wrench with Detent Pin (Tool Only)



20V MAX* 1/2" (13 mm) Impact Wrench Kit with Hog Ring Anvil

SPECIFICATIONS

	DCF889HM2	DCF880M2	DCF880B	DCF880HM2
Volts	20V MAX*	20V MAX*	20V MAX*	20V MAX*
Drive Size	1/2" Square w/ hog ring anvil	1/2" Square w/ detent pin anvil	1/2" Square w/ detent pin anvil	1/2" Square w/ hog ring anvil
Max Torque (in-lbs)	4,800 in-lbs	1,800 in-lbs	1,800 in-lbs	1,800 in-lbs
Max Torque (ft-lbs)	400 ft-lbs	150 ft-lbs	150 ft-lbs	150 ft-lbs
No Load Speed	0-1,500 rpm	0-2,300 rpm	0-2,300 rpm	0-2,300 rpm
Impacts/Minute	0-2,300 ipm	0-2,700 ipm	0-2,700 ipm	0-2,700 ipm
LEDs	1	3	3	3
Weight	6.7 lbs	3.4 lbs	2.2 lbs	3.4 lbs
Tool Length	10-3/4"	5-3/4"	5-3/4"	5-3/4"
Charger/Batteries	Charger / (2) 20V MAX* XR Lithium Ion (4.0 Ah)	Charger / (2) 20V MAX* XR Lithium Ion (4.0 Ah)	Sold Separately	Charger / (2) 20V MAX* XR Lithium Ion (4.0 Ah)



20V MAX* 3/8" (9.5 mm) Impact Wrench with Hog Ring Kit



20V MAX* 3/8" (9.5 mm) Impact Wrench with Hog Ring (Tool Only)



18V XRP™ 1/2" (13 mm) Impact Wrench Kit



18V 1/2" (13 mm) Impact Wrench (Tool Only)



18V XRP™ 3/8" (9.5 mm) Impact Wrench Kit

SPECIFICATIONS

	DCF883M2	DCF883B	DC820KA	DC820B	DC823KA
Volts	20V MAX*	20V MAX*	18V	18V	18V
Drive Size	3/8" Square w/ hog ring anvil	3/8" Square w/ hog ring anvil	1/2" Square w/ detent pin anvil	1/2" Square w/ detent pin anvil	3/8" Square w/ hog ring anvil
Max Torque (in-lbs)	1,560 in-lbs	1,560 in-lbs	1,740 in-lbs	1,740 in-lbs	1,500 in-lbs
Max Torque (ft-lbs)	130 ft-lbs	130 ft-lbs	145 ft-lbs	145 ft-lbs	125 ft-lbs
No Load Speed	0-2,300 rpm	0-2,300 rpm	0 - 2,400 rpm	0 - 2,400 rpm	0 - 2,400 rpm
Impacts/Minute	0-2,700 ipm	0-2,700 ipm	0 - 2,700 ipm	0 - 2,700 ipm	0 - 2,700 ipm
Weight	3.4 lbs	2.2 lbs	4.6 lbs	2.2 lbs	4.6 lbs
Tool Length	5-3/4"	5-3/4"	5-3/4"	5-3/4"	5-3/4"
Charger/Batteries	Charger / (2) 20V MAX* XR Lithium Ion (4.0 Ah)	Sold Separately	Charger / (2) 18V XRP™	Sold Separately	Charger / (2) 18V XRP™



18V 3/8" (9.5 mm) High Torque Impact Wrench (Tool Only)



18V XRP™ 1/2" (13 mm) High Torque Impact Wrench Kit with Detent Pin Anvil



18V 1/2" (13 mm) High Torque Impact Wrench with Detent Pin Anvil (Tool Only)



18V 1/2" (13 mm) High Torque Impact Wrench with Hog Ring Anvil (Tool Only)



12V MAX* 3/8" (9.5 mm) Impact Wrench Kit

SPECIFICATIONS

	DC823B	DW059K-2	DW059B	DW059HB	DCF813S2
Volts	18V	18V	18V	18V	12V MAX*
Drive Size	3/8" square w/ hog ring anvil	1/2" Square w/ detent pin anvil	1/2" Square w/ detent pin anvil	1/2" Square w/ hog ring anvil	3/8" Anvil
Max Torque (in-lbs)	1,500 in-lbs	3,600 in-lbs	3,600 in-lbs	3,600 in-lbs	1,150 in-lbs
Max Torque (ft-lbs)	125 ft-lbs	300 ft-lbs	300 ft-lbs	300 ft-lbs	96 ft-lbs
No Load Speed	0-2,400 rpm	1,650 rpm	1,650 rpm	1,650 rpm	0-2,450 rpm
Impacts/Minute	0-2,700 ipm	2,600 ipm	2,600 ipm	2,600 ipm	0-3,400 ipm
LEDs	1	-	-	-	3
Switch	Variable Speed	Rocker	Rocker	Rocker	Variable Speed
Weight	2.2 lbs	7.5 lbs	5.3 lbs	5.3 lbs	2.3 lbs
Tool Length	5-3/4"	10-3/4"	10-3/4"	10-3/4"	6-1/4"
Charger/Batteries	Sold Separately	Charger / (2) 18V XRP™	Sold Separately	Sold Separately	Charger / (2) 12V MAX* Lithium Ion

SCREWDRIVERS



**12V MAX*
1/4" (6.35 mm)
Screwdriver Kit**



**7.2V 1/4" (6.35 mm)
Two-Position
Screwdriver Kit**



**8V MAX* Gyroscopic
In-line Screwdriver with
Accessory Kit**



**8V MAX* Gyroscopic
Screwdriver with
Conduit Reamer Kit**



**8V MAX* Gyroscopic
Screwdriver Kit**

SPECIFICATIONS	DCF610S2	DW920K-2	DCF682N1	DCF681N2	DCF680N2
Volts	12V MAX*	7.2V	8V MAX*	8V MAX*	8V MAX*
Drive Size	1/4" Hex	1/4" Hex	1/4" Hex	1/4" Hex	1/4" Hex
No Load Speed	0 - 1,050 rpm	0 - 500 rpm	0 - 430 rpm	0 - 430 rpm	0 - 430 rpm
Chuck	1-Handed Loading, 1/4" Hex Chuck	1/4" Hex chuck	1-Handed Loading, 1/4" Hex Chuck	1-Handed Loading, 1/4" Hex Chuck	1-Handed Loading, 1/4" Hex Chuck
Motion Activated	-	-	Yes	Yes	Yes
Max Torque (in-lbs)	-	80 in-lbs	-	-	-
Max Power	160 UW0	-	-	-	-
LEDs	3	-	1	1	2
Length	6-1/4"	-	8-7/8"	8-7/8"	8-7/8"
Weight	2.2 lbs	3.5 lbs	1.1 lbs	1.25 lbs	1.1 lbs
Charger/Batteries	Charger / (2) 12V MAX* Compact Battery	Charger / (2) 7.2V	Charger / (1) 8V MAX* Lithium Ion (1.0 Ah)	Charger / (2) 8V MAX* Lithium Ion (1.0 Ah)	Charger / (2) 8V MAX* Lithium Ion (1.0 Ah)
Includes	Belt hook	-	-	-	-

With respect to 8V MAX* - *Maximum initial battery voltage (measured without a workload) is 8 volts. Nominal voltage is 7.2.

SCREWGUNS



**20V MAX* XR®
Versa-Clutch™ Adjustable
Torque Screwgun Kit**



**20V MAX* XR®
Versa-Clutch™ Adjustable
Torque Screwgun**



**20V MAX* XR®
Drywall
Screwgun Kit**



**20V MAX* XR®
Drywall
Screwgun Kit**



**20V MAX* XR®
Drywall
Screwgun**



**Screwgun Cordless
Collated Magazine
Attachment**

SPECIFICATIONS	DCF622M2	DCF622B	DCF620D2	DCF620M2	DCF620B	DCF6201
Volts	20V MAX*	20V MAX*	20V MAX*	20V MAX*	20V MAX*	
Drive Size	1/4" Quick Release Hex Shank	1/4" Quick Release Hex Shank	1/4" Hex	1/4" Hex	1/4" Hex	
No Load Speed	0-2,000 rpm	0-2,000 rpm	0-4,400 rpm	0-4,400 rpm	0-4,400 rpm	
Weight	4.2 lbs	2.8 lbs	3.2 lbs	3.8 lbs	2.4 lbs	
Tool Length	9-1/4"	9-1/4"	8-3/4"	8-3/4"	8-3/4"	
Charger/Batteries	Charger / (2) 20V MAX* XR Lithium Ion (4.0 Ah)	Sold Separately	Charger / (2) 20V MAX* XR Lithium Ion (2.0 Ah)	Charger / (2) 20V MAX* XR Lithium Ion (4.0 Ah)	Sold Separately	

- Tool-free screw length adjustment button (1" - 2" capacity)
- Disassembly release button (for occasional blow-out/cleaning)
- Screw length detent marks and screw drive depth gauge
- Collated screw strip guide
- Magazine attachment release buttons
- Includes: (2) 6" Phillips bits

CUT-OUT TOOLS



**20V MAX* Cut-Out
Tool Kit**



**20V MAX* Cut-Out Tool
(Tool Only)**



**18V Cut-Out
Tool Kit**



**18V Cut-Out Tool
(Tool Only)**

SPECIFICATIONS	DCS551D2	DCS551B	DC550KA	DC550B
Volts	20V MAX*	20V MAX*	18V	18V
No Load Speed	26,000 rpm	26,000 rpm	26,000 rpm	26,000 rpm
Collet Diameter	1/4", 1/8"	1/4", 1/8"	1/4", 1/8"	1/4", 1/8"
Adjustable Guide	Yes	Yes	Yes	Yes
Weight	3.1 lbs	2.2 lbs	4.5 lbs	2.1 lbs
Charger/Batteries	Charger / (2) 20V MAX* XR Lithium Ion (2.0 Ah)	Sold Separately	Charger / (2) 18V XRP™	Sold Separately
Includes	(1) General Purpose Bit, (1) Drywall Cutting Bit, 1/4" & 1/8" Collets	-	(1) General Purpose Bit, (1) Drywall Cutting Bit, 1/4" & 1/8" Collets	(1) General Purpose Bit, (1) Drywall Cutting Bit, 1/4" & 1/8" Collets

SPECIALTY DRILLING FLEXVOLT



FLEXVOLT® 60V MAX*
Stud and Joist Drill with
E-Clutch System Kit

FLEXVOLT® 60V MAX*
Stud and Joist Drill with
E-Clutch System Kit

FLEXVOLT® 60V MAX*
Stud and Joist Drill with
E-Clutch System (Tool Only)

SPECIFICATIONS	DCD460T2	DCD460T1	DCD460B
Chuck Size	1/2" Keyed	1/2" Keyed	1/2" Keyed
Volts	60V MAX*	60V MAX*	60V MAX*
No Load Speed	0-300, 0-1,250	0-300, 0-1,250	0-300, 0-1,250
Capacity in Wood (Self Feed)	4-5/8"	4-5/8"	4-5/8"
Capacity in Wood (Hole Saw)	6-1/4"	6-1/4"	6-1/4"
Capacity in Wood (Auger Bit)	1-1/2"	1-1/2"	1-1/2"
Capacity in Steel (Twist Bit)	1/2"	1/2"	1/2"
Capacity in Steel (Hole Saw)	5"	5"	5"
Clutch	E-Clutch Bind-up Control	E-Clutch Bind-up Control	E-Clutch Bind-up Control
Charger/Battery	Charger / (2) 20V/60V MAX* Lithium Ion (6.0 Ah)	Charger / (1) 20V/60V MAX* Lithium Ion (6.0 Ah)	Sold Separately
Includes	2 position side handle, chuck key	2 position side handle, chuck key	2 position side handle, chuck key

SDS+ ROTARY HAMMERS



20V MAX* XR® 1"
SDS+ D-Handle Rotary
Hammer Kit

20V MAX* XR® 1"
SDS+ D-Handle
Rotary Hammer (Tool Only)

20V MAX* XR® SDS+ 1"
L-Shape Rotary
Hammer Kit

**20V MAX* XR® SDS+ 1" L-Shape
Rotary Hammer Kit with
On Board Dust Extractor**

SPECIFICATIONS	DCH133M2	DCH133B	DCH273P2	DCH273P2DHO
Volts	20V MAX*	20V MAX*	20V MAX*	20V MAX*
Chuck Type	SDS+	SDS+	SDS+	SDS+
No Load Speed	0-1,100 rpm	0-1,100 rpm	0-1,100 rpm	0-1,100 rpm
Blows/Min	0-4,600 bpm	0-4,600 bpm	0-4,600 bpm	0-4,600 bpm
Impact Energy*	2.6 J	2.6 J	2.1 J	2.1 J
Vibration Measurement	N/A	N/A	6.6 m/s ²	6.6 m/s ²
Vibration Control	No	No	Yes - SHOCKS™	Yes - SHOCKS™
Torque Control	Integral Clutch	Integral Clutch	Integral Clutch	Integral Clutch
Chipping	Yes	Yes	Yes	Yes
Concrete Optimum	5/32" - 5/8"	5/32" - 5/8"	5/32" - 1/2"	5/32" - 1/2"
Weight	5 lbs	4.6 LBS	6.8 lbs	9.88 lbs
Charger/Batteries	Charger / (2) 20V MAX* XR Lithium Ion (4.0 Ah)	Sold Separately	Fast Charger / (2) 20V MAX* XR Lithium Ion (5.0 Ah)	Charger / (2) 20V MAX* XR Lithium Ion (5.0 Ah)
Includes	360° side handle with depth rod	360° side handle with depth rod	360° side handle with depth rod	360° side handle with depth rod



**20V MAX* XR® SDS+
1" L-Shape
Rotary Hammer**

**20V MAX* XR® SDS+
1-1/8" L-Shape Rotary
Hammer Kit**

**20V MAX* XR® SDS+
1-1/8" L-Shape Rotary
Hammer Kit**

**20V MAX* XR® SDS+
1-1/8" L-Shape Rotary
Hammer Kit with On
Board Dust Extractor**

**20V MAX* XR® SDS+
1-1/8" L-Shape
Rotary Hammer
(Tool Only)**

SPECIFICATIONS	DCH273B	DCH293R2	DCH293X2	DCH293R2DH	DCH293B
Volts	20V MAX*	20V MAX*	20V MAX*	20V MAX*	20V MAX*
Chuck Type	SDS+	SDS+	SDS+	SDS+	SDS+
No Load Speed	0-1,100 rpm	0-1,000 rpm	0-1,000 rpm	0-1,000 rpm	0-1,000 rpm
Blows/Min	0-4,600 bpm	0-4,480 bpm	0-4,480 bpm	0-4,480 bpm	0-4,480 bpm
Impact Energy*	2.1 J	3.5 J	3.5 J	3.5 J	3.5 J
Vibration Measurement	6.6 m/s ²	8.5 m/s ²	8.5 m/s ²	8.5 m/s ²	8.5 m/s ²
Vibration Control	Yes - SHOCKS™	Yes - SHOCKS™	Yes - SHOCKS™	Yes - SHOCKS™	Yes - SHOCKS™
Torque Control	Integral Clutch	E-Clutch	E-Clutch	E-Clutch	E-Clutch
Chipping	Yes	Yes	Yes	Yes	Yes
Concrete Optimum	5/32" - 1/2"	5/8" - 7/8"	5/8" - 7/8"	5/8" - 7/8"	5/8" - 7/8"
Weight	5.4 lbs	8.2 lbs	8.2 lbs	10 lbs	5.4 lbs
Charger/Batteries	Sold Separately	Fast Charger / (2) 20V MAX* XR Lithium Ion (6.0 Ah)	Fast Charger / (2) 20V/60V MAX* Lithium Ion (9.0 Ah)	Fast Charger / (2) 20V MAX* XR Lithium Ion (6.0 Ah)	Sold Separately
Includes	360° side handle with depth rod	360° side handle with depth rod	360° side handle with depth rod	360° side handle with depth rod	360° side handle with depth rod

*According to EPTA-Procedure 05/2009

SDS MAX ROTARY HAMMERS FLEXVOLT



**FLEXVOLT[®] 60V MAX*
1-9/16\"/>**



**FLEXVOLT[®] 60V MAX*
1-9/16\"/>**



SPECIFICATIONS	DCH481X2	DCH481B
Volts	60V MAX*	60V MAX*
Chuck Type	SDS MAX	SDS MAX
No Load Speed	0-540 rpm	0-540 rpm
Blows/Min	0-3,150 bpm	0-3,150 bpm
Impact Energy*	6.1 J	6.1 J
Vibration Measurement	9.4 m/s ²	9.4 m/s ²
Vibration Control	Yes - SHOCKS™	Yes - SHOCKS™
Torque Control	E-Clutch	E-Clutch
Chipping	Yes	Yes
Concrete Optimum	1/2" - 1-1/8"	1/2" - 1-1/8"
Weight	13 lbs	11.91 lbs
Charger/Batteries	Fast Charger / (2) 20V/60V MAX* Lithium Ion (9.0 Ah)	Sold Separately
Includes	360° side handle with depth rod	360° side handle with depth rod



CONCRETE VIBRATORS



20v **XR**

**20V MAX*
Pencil Vibrator Kit**



20v **XR**

**20V MAX*
Pencil Vibrator (Tool Only)**

SPECIFICATIONS	DCE531M1	DCE531B
Volts	20V MAX*	20V MAX*
Vibrator Diameter	1-1/8"	1-1/8"
Shaft Length	4'	4'
Vibrations per Minute	14,000 vpm	14,000 vpm
Weight	11.8 lbs	8 lbs
Charger/Batteries	Charger / (1) 20V MAX* XR Lithium Ion (4.0 Ah)	Sold Separately

METAL CUTTING SAWS



**20V MAX* 5-1/2" (127 mm)
Metal Cutting Circular Saw Kit**



**20V MAX* 5-1/2" (127 mm) Metal
Cutting Circular Saw (Tool Only)**



SPECIFICATIONS	DCS373P2	DCS373B
Volts	20V MAX*	20V MAX*
No Load Speed	3,700 rpm	3,700 rpm
Blade Diameter	5-1/2"	5-1/2"
Depth of Cut at 90°	1-11/16"	1-11/16"
Weight	8.3 lbs	7.0 lbs (tool only)
Charger/Batteries	Charger, (2) 20V MAX* XR Lithium Ion (5.0 Ah)	Sold Separately
Includes	5-1/2" carbide tipped bade	5-1/2" carbide tipped bade

CIRCULAR SAWS FLEXVOLT



FLEXVOLT® 60V MAX* 7-1/4"
(184mm) Circular Saw Kit



FLEXVOLT® 60V MAX* 7-1/4"
(184mm) Circular Saw Kit



FLEXVOLT® 60V MAX* 7-1/4"
(184mm) Circular Saw Kit (Tool Only)

SPECIFICATIONS	DCS575T2	DCS575T1	DCS575B
Volts	60V MAX*	60V MAX*	60V MAX*
No Load Speed	5,800 rpm	5,800 rpm	5,800 rpm
Blade Diameter	7-1/4"	7-1/4"	7-1/4"
Bevel Capacity	0° – 57°	0° – 57°	0° – 57°
Depth of Cut at 45°	1-5/8"	1-5/8"	1-5/8"
Depth of Cut at 90°	2-9/16"	2-9/16"	2-9/16"
Weight	7.6 lbs (tool only)	7.6 lbs (tool only)	7.6 lbs
Charger/Batteries	Charger / (1) 20V/60V MAX* Lithium Ion (6.0 Ah)	Charger / (1) 20V/60V MAX* Lithium Ion (6.0 Ah)	Sold Separately
Includes	Circular saw blade, blade wrench	Circular saw blade, blade wrench	Circular saw blade, blade wrench

CIRCULAR SAWS



20V MAX* 6-1/2"
(165 mm) Circular Saw Kit



20V MAX* 6-1/2" (165 mm)
Circular Saw (Tool Only)



18V 6-1/2" (165 mm)
Circular Saw (Tool Only)



20V MAX* 7-1/4"
(184mm) Circular Saw Kit



20V MAX* 7-1/4"
(184mm) Circular Saw

SPECIFICATIONS	DCS391P1	DCS391B	DC390B	DCS570P1	DCS570B
Volts	20V MAX*	20V MAX*	18V	20V MAX*	20V MAX*
No Load Speed	5,250 rpm	5,250 rpm	3,700 rpm	5250 rpm	5250 rpm
Blade Diameter	6-1/2"	6-1/2"	6-1/2"	7-1/4"	7-1/4"
Bevel Capacity	0° – 50°	0° – 50°	0° – 50°	0° – 57°	0° – 57°
Depth of Cut at 45°	1-5/8"	1-5/8"	1 - 5/8"	2"	2"
Depth of Cut at 90°	2-1/4"	2-1/4"	2-1/4"	2-9/16"	2-9/16"
Weight	7.0 lbs (tool only)	7.0 lbs	6.3 lbs	7.6 lbs (tool only)	7.6 lbs
Charger/Batteries	Charger / (1) 20V MAX* XR Lithium Ion (5.0 Ah)	Sold Separately	Sold Separately	Charger / (1) 20V MAX* Lithium Ion (5.0 Ah)	Sold Separately
Includes	Carbide tipped circular saw blade	Carbide tipped circular saw blade	Carbide tipped blade, blade wrench	Circular saw blade, blade wrench	Circular saw blade, blade wrench

TRACK SAWS FLEXVOLT



FLEXVOLT® 60V MAX* 6-1/2"
Track Saw Kit with 59" Track



FLEXVOLT® 60V MAX* 6-1/2" Track Saw Kit



FLEXVOLT® 60V MAX* 6-1/2" Track Saw Kit

SPECIFICATIONS	DCS520ST1	DCS520T1	DCS520B
Power	60V MAX*	60V MAX*	60V MAX*
No Load Speed	2500 - 4200 rpm	2500 - 4200 rpm	2500 - 4200 rpm
Blade Diameter	6-1/2"	6-1/2"	6-1/2"
Bevel Capacity	0° – 47°	0° – 47°	0° – 47°
Max. Cut at 90°	1-5/8"	1-5/8"	1-5/8"
Max. Cut at 45°	2-1/8"	2-1/8"	2-1/8"
Weight	12.1 lbs (tool only)	12.1 lbs (tool only)	12.1 lbs (tool only)
Charger/Batteries	Charger / (1) 20/60V MAX* Lithium Ion (6.0 Ah)	Charger / (1) 20/60V MAX* Lithium Ion (6.0 Ah)	Sold Separately
Includes	59" Track, Circular Saw Blade, Wrench	Circular saw blade, blade wrench	Circular saw blade, blade wrench

TRACK SAW ATTACHMENTS

	DW5240 – Precision ground woodworking blade for TrackSaw™ System - 40T		DWS5023 – 102" (259 cm) TrackSaw™ Track		DWS5031 – TrackSaw™ Router Adapter
	DWA16542 – Precision ground woodworking blade for TrackSaw™ System - 42T		DWS5025 – TrackSaw™ Track Bag		DWS5032 – TrackSaw™ Replacement Friction Strip
	DWS5020 – 46" (116.8 cm) TrackSaw™ Track		DWS5026 – TrackSaw™ Track Clamps		DWS5033 – TrackSaw™ Track Connector
	DWS5022 – 59" (149.8 cm) TrackSaw™ Track		DWS5029 – TrackSaw™ Replacement Zero-clearance Anti Splinter Strip		DWS5028 – TrackSaw™ Miter Gauge

JIG SAWS



**20V MAX*
Jig Saw Kit**



**20V MAX*
Jig Saw (Tool Only)**



**18V XRP™
Jig Saw Kit**



**18V Jig Saw
(Tool Only)**

SPECIFICATIONS	DCS331M1	DCS331B	DCS330L	DC330B
Volts	20V MAX*	20V MAX*	18V	18V
Strokes/Min	0 - 3,000 spm	0 - 3,000 spm	0 - 3,000 spm	0 - 3,000 spm
Stroke Length	1"	1"	1"	1"
Keyless Blade Clamp	Yes	Yes	Yes	Yes
Dust Blower	Yes	Yes	Yes	Yes
Weight	6.8 lbs	5.4 lbs	6.6 lbs	5.1 lbs
Charger/Batteries	Charger / (1) 20V MAX* XR Lithium Ion (4.0 Ah)	Sold Separately	Charger / (1) 18V XRP™ Lithium Ion	Sold Separately
Includes	Jig saw blade	Jig saw blade	Jig saw blade	-

RECIPROCATING SAWS FLEXVOLT[®]



**FLEXVOLT[®] 60V MAX*
Reciprocating Saw Kit**



**FLEXVOLT[®] 60V MAX*
Reciprocating Saw Kit**



**FLEXVOLT[®] 60V MAX*
Reciprocating Saw (Tool Only)**

SPECIFICATIONS	DCS388T2	DCS388T1	DCS388B
Volts	60V MAX*	60V MAX*	60V MAX*
Strokes/Min	0-3,000 spm	0-3,000 spm	0-3,000 spm
Stroke Length	1-1/8"	1-1/8"	1-1/8"
Keyless Blade Clamp	Yes	Yes	Yes
Shoe Type	Pivoting	Pivoting	Pivoting
Electric Brake	Yes	Yes	Yes
Weight	12.4 lbs	10.1 lbs	7.8 lbs
Charger/Batteries	Charger / (2) 20V/60V MAX* Lithium Ion (6.0 Ah)	Charger / (1) 20V/60V MAX* Lithium Ion (6.0 Ah)	Sold Separately

RECIPROCATING SAWS



**20V MAX* XR[®] Compact
Reciprocating Saw Kit**



**20V MAX* XR[®] Compact
Reciprocating Saw Kit**



**20V MAX* XR[®] Compact
Reciprocating Saw (Tool Only)**



**20V MAX* Compact
Reciprocating Saw Kit**

SPECIFICATIONS	DCS367P1	DCS367D1	DCS367B	DCS387P1
Volts	20V MAX*	20V MAX*	20V MAX*	20V MAX*
Strokes/Min	0-2,900 spm	0-2,900 spm	0-2,900 spm	0-2,900 spm
Stroke Length	1-1/8"	1-1/8"	1-1/8"	1-1/8"
Keyless Blade Clamp	Yes, 4-Position	Yes, 4-Position	Yes, 4-Position	Yes, 4-position
Shoe Type	Adjustable & Pivoting	Adjustable & Pivoting	Adjustable & Pivoting	Pivoting
Electric Brake	Yes	Yes	Yes	Yes
Weight	5.0 lbs (tool only)	5.0 lbs (tool only)	5.0 lbs	6.4 lbs
Charger/Batteries	Charger / (1) 20V MAX* XR Lithium Ion (5.0 Ah)	Charger / (1) 20V MAX* Lithium Ion (2.0 Ah)	Sold Separately	Charger / (1) 20V MAX* XR Lithium Ion (5.0 Ah)



RECIPROCATING SAWS



20V MAX* Compact Reciprocating Saw Kit



20V MAX* Compact Reciprocating Saw (Tool Only)



20V MAX* Reciprocating Saw Kit



20V MAX* Reciprocating Saw (Tool Only)

SPECIFICATIONS

	DCS387D1	DCS387B	DCS380P1	DCS380B
Volts	20V MAX*	20V MAX*	20V MAX*	20V MAX*
Strokes/Min	0-2,900 spm	0-2,900 spm	0-3,000 spm	0-3,000 spm
Stroke Length	1-1/8"	1-1/8"	1-1/8"	1-1/8"
Keyless Blade Clamp	Yes, 4-position	Yes, 4-position	Yes, 4-position	Yes, 4-position
Shoe Type	Pivoting	Pivoting	Adjustable & Pivoting	Adjustable & Pivoting
Electric Brake	Yes	Yes	Yes	Yes
Weight	5.9 lbs	5.0 lbs	7.3 lbs	6.0 lbs
Charger/Batteries	Charger / (1) 20V MAX* XR Lithium Ion (2.0 Ah)	Sold Separately	Charger / (1) 20V MAX* XR Lithium Ion (5.0 Ah)	Sold Separately



18V XRP™ Reciprocating Saw Kit



18V XRP™ Reciprocating Saw Kit



18V Reciprocating Saw (Tool Only)

SPECIFICATIONS

	DC385L	DC385K	DC385B
Volts	18V	18V	18V
Keyless Blade Clamp	Yes, 4-position	Yes, 4-position	Yes, 4-position
Stroke/Min	0-3,000 spm	0-3,000 spm	0-3,000 spm
Stroke Length	1-1/8"	1-1/8"	1-1/8"
Electric Brake	Adjustable & Pivoting	Adjustable & Pivoting	Adjustable & Pivoting
Weight	8.2 lbs	8.2 lbs	5.8 lbs
Charger/Batteries	Charger / (1) 18V XRP™ Lithium Ion	Charger / (1) 18V XRP™ Lithium Ion	Sold Separately



12V MAX* Pivot Reciprocating Saw Kit



12V MAX* Pivot Reciprocating Saw (Tool Only)

SPECIFICATIONS

	DCS310S1	DCS310B
Volts	12V MAX*	12V MAX*
Keyless Blade Clamp	Yes	Yes
Stroke/Min	0-2,700 spm	0-2,700 spm
Stroke Length	9/16"	9/16"
Electric Brake	Adjustable and Pivoting	Adjustable and Pivoting
Weight	5.2 lbs	3.1 lbs
Charger/Batteries	Charger / (1) 12V MAX* Lithium Ion	Sold Separately



MULTI-TOOLS



20V MAX* XR® Oscillating Multi-Tool Kit



20V MAX* XR® Oscillating Multi-Tool (Tool Only)

SPECIFICATIONS

	DCS355D1	DCS355B
Volts	20V MAX*	20V MAX*
Oscillations/Min	0-20,000 opm	0-20,000 opm
Oscillations Angle	1.6°	1.6°
Variable Speed	Yes	Yes
Keyless Accessory Change	Yes	Yes
LED Light	Yes	Yes
Weight	3.2 lbs	2.3 lbs
Charger/Batteries	Charger / (1) 20V MAX* XR Lithium Ion	Sold Separately
Includes	28 Accessory pieces	3 Accessory pieces

PLANER



20V MAX* XR® Planer

SPECIFICATIONS

	DCP580B
Volts	20V MAX*
No Load Speed	15,000 rpm
Depth of Cut	5/65"
Planing Width	3-1/4"
Weight	5.5 lbs
Charger / Batteries	Sold Separately

MITER SAWS FLEXVOLT[®]



FLEXVOLT[®] 120V MAX* 12" Double Bevel Compound Sliding Miter Saw Kit



FLEXVOLT[®] 120V MAX* 12" Double Bevel Compound Sliding Miter Saw Kit



FLEXVOLT[®] 120V MAX* 12" Double Bevel Compound Sliding Miter Saw

SPECIFICATIONS	DHS790AT2	DHS790T2	DHS790AB
Volts	120V MAX*	120V MAX*	120V MAX*
No Load Speed / Amps	3,800 rpm / 15 amps	3,800 rpm / 15 amps	3,800 rpm / 15 amps
Blade Diameter	12"	12"	12"
Arbor Size	1"	1"	1"
Horizontal Capacity (Max with Back Fence)	13-3/4" (16")	13-3/4" (16")	13-3/4" (16")
Vertical Capacity	6-3/4"	6-3/4"	6-3/4"
Vertically Nested Capacity	7-1/2"	7-1/2"	7-1/2"
Weight	56 lbs	56 lbs	56 lbs
Charger/Batteries	Dual Port Fast Charger / (2) 20V/60V MAX* Lithium Ion (6.0 Ah)	Dual Port Fast Charger / (2) 20V/60V MAX* Lithium Ion (6.0 Ah)	Sold Separately
Includes	12" Blade, 120V AC adapter, Dust Bag, Blade Wrench	12" Blade, Dust Bag, Blade Wrench	12" Blade, 120V AC adapter, Dust Bag, Blade Wrench



FLEXVOLT[®] 120V MAX* 12" Double Bevel Compound Miter Saw Kit



FLEXVOLT[®] 120V MAX* 12" Double Bevel Compound Miter Saw Kit



FLEXVOLT[®] 120V MAX* 12" Double Bevel Compound Miter Saw

SPECIFICATIONS	DHS716AT2	DHS716T2	DHS716AB
Volts	120V MAX*	120V MAX*	120V MAX*
No Load Speed / Amps	3,800 rpm / 15 amps	3,800 rpm / 15 amps	3,800 rpm / 15 amps
Blade Diameter	12"	12"	12"
Arbor Size	1"	1"	1"
Horizontal Capacity (Max with Back Fence)	2" x 8" (2" x 10")	2" x 8" (2" x 10")	2" x 8" (2" x 10")
Vertical Capacity	6-1/2"	6-1/2"	6-1/2"
Vertically Nested Capacity	6-5/8"	6-5/8"	6-5/8"
Weight	44 lbs	44 lbs	44 lbs
Charger/Batteries	Dual Port Fast Charger / (2) 20V/60V MAX* Lithium Ion (6.0 Ah)	Dual Port Fast Charger / (2) 20V/60V MAX* Lithium Ion (6.0 Ah)	Sold Separately
Includes	12" Blade, 120V AC adapter, Dust Bag, Blade Wrench	12" Blade, Dust Bag, Blade Wrench	12" Blade, 120V AC adapter, Dust Bag, Blade Wrench

MITER SAWS



20V MAX* 7 1/4" Sliding Miter Saw Kit



20V MAX* 7 1/4" Sliding Miter Saw

SPECIFICATIONS	DCS361M1	DCS361B
Volts	20V MAX*	20V MAX*
No Load Speed / Amps	3,750 rpm	3,750 rpm
Blade Diameter	7-1/4"	7-1/4"
Arbor Size	5/8"	5/8"
Horizontal Capacity (Max with Back Fence)	8"	8"
Vertical Capacity	3-1/2"	3-1/2"
Vertically Nested Capacity	3-5/8"	3-5/8"
Weight	31.6 lbs	30 lbs
Charger/Batteries	Charger / (1) 20V MAX* XR Lithium Ion (4.0 Ah)	Sold Separately
Includes	Carbide Blade, Blade Wrench, Material Clamp	Carbide Blade, Blade Wrench

TABLE SAWS FLEXVOLT[®]



FLEXVOLT[®] 60V MAX* 8-1/4" Table Saw Kit



FLEXVOLT[®] 60V MAX* 8-1/4" Table Saw

SPECIFICATIONS	DCS7485T1	DCS7485B
Volts	60V MAX*	60V MAX*
No Load Speed	5,800 rpm	5,800 rpm
Blade Diameter	8-1/4"	8-1/4"
Arbor Size	5/8"	5/8"
Dust Port Diameter	2-1/2"	2-1/2"
Depth of Cut at 90°	2-1/2"	2-1/2"
Depth of Cut at 45°	1-3/4"	1-3/4"
Max Rip to Right of Blade	24"	24"
Max Rip to Left of Blade	12"	12"
Tool Weight	48 lbs	48 lbs
Charger / Batteries	Fast Charger / (1) 20V/60V MAX* Lithium Ion (6.0 Ah)	Sold Separately
Includes	Carbide Blade, Blade Guard, Riving Knife, Miter Gauge, (2) Blade Wrenches, Rip Fence, Push Stick	Carbide Blade, Blade Guard, Riving Knife, Miter Gauge, (2) Blade Wrenches, Rip Fence, Push Stick

NAILERS



20V MAX* XR® Brushless Framing Nailer Kit



20V MAX* XR® Brushless Framing Nailer (Tool Only)



20V MAX* XR® Brushless Metal Connector Nailer Kit



20V MAX* XR® Brushless Metal Connector Nailer (Tool Only)

SPECIFICATIONS

	DCN692M1	DCN692B	DCN693M1	DCN693B
Volts	20V MAX*	20V MAX*	20V MAX*	20V MAX*
Fastener Type/Gauge	30° Paper Tape Framing Nails	30° Paper Tape Framing Nails	Metal Connector Nails	Metal Connector Nails
Nail Length Capacity	2" - 3-1/2"	2" - 3-1/2"	1-1/2" - 2-1/2"	1-1/2" - 2-1/2"
Nail Diameter/Staple Crown Width	.113" - .131"	.113" - .131"	.113" - .162"	.113" - .162"
Magazine Angle	33 Degree	33 Degree	30 Degree	30 Degree
Magazine Capacity	55 nails	55 nails	29 nails	29 nails
Magazine Loading	Rear	Rear	Rear	Rear
Operating Mode	Bump & Sequential	Bump & Sequential	Rapid Sequential & Sequential	Rapid Sequential & Sequential
Integrated Rafter Hook	Yes	Yes	Yes	Yes
Tool-Free Jam Cleaning	No	No	No	No
Tool-Free Depth Adj.	Yes	Yes	Yes	Yes
Weight	9.1 lbs	8 lbs	9.4 lbs	8 lbs
Charger/Batteries	Charger / (1) 20V MAX* XR Lithium Ion (4.0 Ah)	Sold Separately	Charger / (1) 20V MAX* XR Lithium Ion (4.0 Ah)	Sold Separately
Includes	No-mar tip	No-mar tip	Tip Replacement Kit	Tip Replacement Kit



20V MAX* XR® Brushless 18 Gauge Brad Nailer Kit



20V MAX* XR® Brushless 18 Gauge Brad Nailer (Tool Only)



20V MAX* XR® Brushless 18 Gauge Narrow Crown Stapler Kit



20V MAX* XR® Brushless 18 Gauge Narrow Crown Stapler (Tool Only)

SPECIFICATIONS

	DCN680D1	DCN680B	DCN681D1	DCN681B
Volts	20V MAX*	20V MAX*	20V MAX*	20V MAX*
Fastener Type/Gauge	18 Gauge Brad Nails	18 Gauge Brad Nails	18 Gauge Narrow Crown Staples	18 Gauge Narrow Crown Staples
Nail Length Capacity	5/8" - 2-1/8"	5/8" - 2-1/8"	1/2" - 1-1/2"	1/2" - 1-1/2"
Nail Diameter/Staple Crown Width	N/A	N/A	1/4" Crown	1/4" Crown
Magazine Angle	Straight	Straight	Straight	Straight
Magazine Capacity	110 nails	110 nails	100 staples	100 staples
Magazine Loading	Side	Side	Bottom	Bottom
Operating Mode	Bump & Sequential	Bump & Sequential	Bump & Sequential	Bump & Sequential
Integrated Belt Hook	Yes	Yes	Yes	Yes
Tool-Free Jam Cleaning	Yes	Yes	Yes	Yes
Tool-Free Depth Adj.	Yes	Yes	Yes	Yes
Weight	6.1 lbs	5.3 lbs	6.4 lbs	5.7 lbs
Charger/Batteries	Charger / (1) 20V MAX* XR Lithium Ion (2.0 Ah)	Sold Separately	Charger / (1) 20V MAX* XR Lithium Ion (2.0 Ah)	Sold Separately
Includes	No-mar tips	No-Mar Tips	No-Mar Tips	No-Mar Tips



20V MAX* XR® Brushless 16 Gauge Angled Finish Nailer Kit



20V MAX* XR® Brushless 16 Gauge Angled Finish Nailer (Tool Only)



20V MAX* XR® Brushless 15 Gauge Angled Finish Nailer Kit



20V MAX* XR® Brushless 15 Gauge Angled Finish Nailer (Tool Only)

SPECIFICATIONS

	DCN660D1	DCN660B	DCN650D1	DCN650B
Volts	20V MAX*	20V MAX*	20V MAX*	20V MAX*
Fastener Type/Gauge	16 Gauge Angled Finish Nails	16 Gauge Angled Finish Nails	15 Gauge "DA" Style Finish Nails	15 Gauge "DA" Style Finish Nails
Nail Length Capacity	1-1/4" - 2-1/2"	1-1/4" - 2-1/2"	1-1/4" - 2-1/2"	1-1/4" - 2-1/2"
Nail Diameter/Staple Crown Width	N/A	N/A	N/A	N/A
Magazine Angle	20 Degree	20 Degree	34 Degree	34 Degree
Magazine Capacity	110 nails	110 nails	100 nails	100 nails
Magazine Loading	Rear	Rear	Rear	Rear
Operating Mode	Bump & Sequential	Bump & Sequential	Bump & Sequential	Bump & Sequential
Integrated Belt Hook	Yes	Yes	Yes	Yes
Tool-Free Jam Cleaning	Yes	Yes	Yes	Yes
Tool-Free Depth Adj.	Yes	Yes	Yes	Yes
Weight	6.0 lbs	5.2 lbs	6.4 lbs	5.8 lbs
Charger/Batteries	Charger / (1) 20V MAX* XR Lithium Ion (2.0 Ah)	Sold Separately	Charger / (1) 20V MAX* XR Lithium Ion (2.0 Ah)	Sold Separately
Includes	No-Mar Tips	No-Mar Tips	No-Mar Tips	No-Mar Tips

NAILERS



**20V MAX* XR® Brushless
18 Gauge Flooring
Stapler Kit**



**20V MAX* XR® Brushless
18 Gauge Flooring
Stapler (Tool Only)**



**18V XRP™ 18 Gauge
Brad Nailer Kit**



**18V XRP™ 18 Gauge
Brad Nailer (Tool Only)**

SPECIFICATIONS

	DCN682M1	DCN682B	DC608K	DC608B
Volts	20V MAX*	20V MAX*	18V	18V
Fastener Type/Gauge	18 Gauge Narrow Crown Staples	18 Gauge Narrow Crown Staples	18 Gauge Brad Nails	18 Gauge Brad Nails
Nail Length Capacity	1/2" - 1-1/2"	1/2" - 1-1/2"	5/8" - 2"	5/8" - 2"
Nail Diameter/Staple Crown Width	1/4" Crown	1/4" Crown	N/A	N/A
Magazine Angle	Straight	Straight	Straight	Straight
Magazine Capacity	100 staples	100 staples	110 nails	110 nails
Magazine Loading	Bottom	Bottom	Side	Side
Operating Mode	Rapid Sequential & Sequential	Rapid Sequential & Sequential	Bump & Sequential	Bump & Sequential
Integrated Belt Hook	Yes	Yes	Yes	Yes
Tool-Free Jam Cleaning	Yes	Yes	Yes	Yes
Tool-Free Depth Adj.	Yes	Yes	Yes	Yes
Weight	7.6 lbs	6.2 lbs	7.4 lbs	5.2 lbs (tool only)
Charger/Batteries	Charger / (1) 20V MAX* XR Lithium Ion (4.0 Ah)	Sold Separately	Charger / (1) 18V XRP™	Sold Separately
Includes	No-Mar Tips	No-Mar Tips	No-Mar Tip	No-Mar Tip



**18V XRP™ 16 Gauge
Straight Finish Nailer Kit**



**18V XRP™ 16 Gauge
Angled Finish Nailer Kit**



**18V XRP™ 15 Gauge
Angled Finish Nailer Kit**

SPECIFICATIONS

	DC616K	DC618K	DC628K
Volts	18V	18V	18V
Fastener Type/Gauge	16 Gauge Straight Finish Nails	16 Gauge Angled Finish Nails	15 Gauge "DA" Style Finish Nails
Nail Length Capacity	1-1/4" - 2-1/2"	1-1/4" - 2-1/2"	1-1/4" - 2-1/2"
Nail Diameter/Staple Crown Width	N/A	N/A	N/A
Magazine Angle	Straight	20 Degree	34 Degree
Magazine Capacity	110 nails	110 nails	110 nails
Magazine Loading	Rear	Rear	Rear
Operating Mode	Bump & Sequential	Bump & Sequential	Bump & Sequential
Integrated Belt Hook	Yes	Yes	Yes
Tool-Free Jam Cleaning	Yes	Yes	Yes
Tool-Free Depth Adj.	Yes	Yes	Yes
Weight	8.5 lbs	8.5 lbs	8.9 lbs
Charger/Batteries	Charger / (1) 18V XRP™	Charger / (1) 18V XRP™	Charger / (1) 18V XRP™
Includes	No-Mar Tip	No-Mar Tip	No-Mar Tip

FRAMING NAILS

CAT #	Head Type	Length	Dia	Shank	Finish	Box Qty.
30 Degree Paper Tape Faming Nails						
DPT-10D120FH	Off-Set Round Head	3"	.120"	Smooth	Bright	2500
DPT-10D120GFH	Off-Set Round Head	3"	.120"	Smooth	Galvanized	2000
DPT-10D131FH	Off-Set Round Head	3"	.131"	Smooth	Bright	2500
DPT-10DR120GFH	Off-Set Round Head	3"	.120"	Ring	Galvanized	2000
DPT-12D120FH	Off-Set Round Head	3-1/4"	.120"	Smooth	Bright	2500
DPT-12D131FH	Off-Set Round Head	3-1/4"	.131"	Smooth	Bright	2500
DPT-12D131GFH	Off-Set Round Head	3-1/4"	.131"	Smooth	Galvanized	2000
DPT-16D131FH	Off-Set Round Head	3-1/2"	.131"	Smooth	Bright	2000
DPT-6D113FH	Off-Set Round Head	2"	.113"	Smooth	Bright	5000
DPT-8D113FH	Off-Set Round Head	2-3/8"	.113"	Smooth	Bright	5000
DPT-8DR113GFH	Off-Set Round Head	2-3/8"	.113"	Ring	Galvanized	2000
Compatible with most cordless and pneumatic paper tape nailers, including those made by DEWALT [®] , BOSTITCH [®] , PORTER-CABLE [®] , Paslode [®] , and Senco [®]						
30 Degree Metal Connector Nails						
DMC14825HDG.5M	-	2-1/2"	.148"	-	Thickcoat	500
DWMC13115-2M	-	1-1/2"	.131"	-	Bright	2000
DWMC13115G-2M	-	1-1/2"	.131"	-	Galvanized	2000
DMC13115HDG.5M	-	1-1/2"	.131"	-	Galvanized	500
DMC14815B.5M	-	1-1/2"	.148"	-	Bright	500
DMC14815HDG.5M	-	1-1/2"	.148"	-	Galvanized	500



FINISH FASTENERS

CAT #	DESCRIPTION	LENGTH	BOX QTY.
18 GAUGE Straight Brad Nails			
DBN18063	Brad Nail	5/8" (15.8 mm)	5,000
DBN18125	Brad Nail	1-1/4" (31.7 mm)	5,000
DBN18150	Brad Nail	1-1/2" (38.1 mm)	5,000
DBN18200	Brad Nail	2" (50.8 mm)	5,000
DBN18163-2	Brad Nail	5/8" (15.8 mm)	2,500
DBN18100-2	Brad Nail	1" (25.4 mm)	2,500
DBN18125-2	Brad Nail	1-1/4" (31.7 mm)	2,500
DBN18150-2	Brad Nail	1-1/2" (38.1 mm)	2,500
DBN18175-2	Brad Nail	1-3/4" (44.5 mm)	2,500
DBN18200-2	Brad Nail	2" (50.8 mm)	2,500
DWBN18PP	Brad Nail Project Pack	3/4", 1", 2" (300 each)	900
18 GAUGE 1/4" Narrow Crown Staples			
DNS18050-2	Narrow Crown Staples	1/2" (12.7 mm)	2,500
DNS18063-2	Narrow Crown Staples	5/8" (15.8 mm)	2,500
DNS18075-2	Narrow Crown Staples	3/4" (19.1 mm)	2,500
DNS18088-2	Narrow Crown Staples	7/8" (22.2 mm)	2,500
DNS18100-2	Narrow Crown Staples	1" (25.4 mm)	2,500
DNS18125-2	Narrow Crown Staples	1-1/4" (31.7 mm)	2,500
DNS18150-2	Narrow Crown Staples	1-1/2" (38.1 mm)	2,500
DWNS18PP	Narrow Crown Staples	1/2", 3/4", 1" (300 each)	900



CAT #	DESCRIPTION	LENGTH	BOX QTY.
15 GAUGE 34° Angled Finish Nails			
DCA15150-2	34° Angled Nails	1-1/2" (38.1 mm)	2,500
DCA15200-2	34° Angled Nails	2" (50.8 mm)	2,500
DCA15200G-2	34° Angled Nails (Galvanized)	2" (50.8 mm)	2,500
DCA15250-2	34° Angled Nails	2"-1/2" (63.5 mm)	2,500
DCA15250G-2	34° Angled Nails (Galvanized)	2"-1/2" (63.5 mm)	2,500
DWDA15PP	34° Angled Nails	1-1/2", 2", 2-1/2" (300 each)	900
16 GAUGE 20° Angled Finish Nails			
DCA16125	20° Angled Finish Nails	1-1/2" (38.1 mm)	2,500
DWAN1615SS	20° Angled Finish Nails (Stainless)	1-1/2" (38.1 mm)	500
DCA16150	20° Angled Finish Nails	2" (50.8 mm)	2,500
DWAN1620SS	20° Angled Finish Nails (Stainless)	2" (50.8 mm)	500
DCA16200	20° Angled Finish Nails	2-1/2" (63.5 mm)	2,500
DCA16250	20° Angled Finish Nails	2-1/2" (63.5 mm)	2,500
DWAN1625SS	20° Angled Finish Nails (Stainless)	2-1/2" (63.5 mm)	500



SCISSORS



20V MAX* 18 Gauge Swivel Head Double Cut Shear Kit



20V MAX* 18 Gauge Swivel Head Double Cut Shear (Tool Only)



20V MAX* 14 Gauge Swivel Head Shear Kit



20V MAX* 14 Gauge Swivel Head Shear (Tool Only)

SPECIFICATIONS	DCS491M2	DCS491B	DCS494M2	DCS494B
Volts	20V MAX*	20V MAX*	20V MAX*	20V MAX*
Strokes/Min	0-2,450 spm	0-2,450 spm	0-2,450 spm	0-2,450 spm
Min. Cutting Radius	4.5"	4.5"	5"	5"
Capacity in Steel	18 Gauge	18 Gauge	14 Gauge	14 Gauge
Weight	3.89 lbs (tool only)	3.89 lbs (tool only)	4.6 lbs (tool only)	4.6 lbs (tool only)
Charger/Batteries	Charger / (2) 20V MAX* XR Lithium Ion (4.0 Ah)	Sold Separately	Charger / (2) 20V MAX* XR Lithium Ion (4.0 Ah)	Sold Separately
Includes	Blade wrench, Kit Bag	Blade wrench, Kit Bag	Blade wrench, Kit Bag	Blade wrench



20V MAX* 18 Gauge Swivel Head Offset Shears (Tool Only)



18V 18 Gauge Off-Set Shear (Tool Only)



18V 18 Gauge Swivel Head and Shear (Tool Only)

SPECIFICATIONS	DCS496B	DC495B	DC490B
Volts	20V MAX*	18V	18V
Strokes/Min	0-2,450 spm	0-2,300 spm	0-2,300 spm
Min. Cutting Radius	1"	1"	5.5"
Capacity in Steel	18 Gauge	18 Gauge	18 Gauge
Weight	3.7 lbs	3.7 lbs	3.7 lbs
Charger/Batteries	Sold Separately	Sold Separately	Sold Separately
Includes	Blade wrench	Blade wrench	Blade wrench



PRESS TOOLS



20V MAX* Press Tool Kit



20V MAX* Press Tool Kit

SPECIFICATIONS

	DCE200M2K	DCE200M2
Volts	20V MAX*	20V MAX*
Force	4 Tons	4 Tons
Material	Copper, Stainless Steel, Carbon Steel	Copper, Stainless Steel, Carbon Steel
Tool Weight	7.16 lbs	7.16 lbs
Pipe Capacity	4"	4"
Charger / Batteries	Charger / (2) 20V MAX* XR Lithium Ion (4.0 Ah)	Charger / (2) 20V MAX* XR Lithium Ion (4.0 Ah)
Includes	(5) .5" - 2" Crimping Heads, Shoulder Strap, USB Cable	Shoulder Strap, USB Cable



PEX EXPANSION



1" Pex Expander Tool Kit



1" Pex Expander (Tool Only)

SPECIFICATIONS

	DCE400D2	DCE400B
Volts	20V MAX*	20V MAX*
Capacity	3/8" - 1"	3/8" - 1"
Stroke Length	16 mm	16 mm
Speed	60 spm	60 spm
Tool Weight	3.93 lb	3.93 lb
Charger / Batteries	Charger / (2) 20V MAX* XR Lithium Ion (2.0 Ah)	Sold Separately
Includes	(3) 1/2", 3/4", 1" Crimping Heads, Cone Grease	(3) 1/2", 3/4", 1" Crimping Heads, Cone Grease



PEX EXPANDER ACCESSORIES

CAT #	DESCRIPTION
DCE40038	3/8" Pex Expander Head
DCE40012	1/2" Pex Expander Head
DCE40034	3/4" Pex Expander Head
DCE40058	5/8" Pex Expander Head
DCE4001	1" Pex Expander Head

CRIMPING TOOLS



20V MAX* Died Electrical Cable Crimping Tool



20V MAX* Dieless Cable Crimping Tool

SPECIFICATIONS

	DCE300M2	DCE350M2
Volts	20V MAX*	20V MAX*
Force	12 Tons	6 Tons
Material	Copper, Aluminum	Copper, Aluminum
Cable Capacity	750 MCM CU / AL	750 MCM CU / AL
Die Type	U Type	-
Tool Weight	14.6 lbs	11.2 lbs
Charger / Batteries	Charger / (2) 20V MAX* XR Lithium Ion (4.0 Ah)	Charger / (2) 20V MAX* XR Lithium Ion (4.0 Ah)



CABLE CUTTING TOOLS



20V MAX* Cable Cutting Tool Kit



20V MAX* Cable Cutting Tool (Tool Only)



20V MAX* ACSR Cable Cutting Tool Kit



SPECIFICATIONS

	DCE150D1	DCE150B	DCE155D1
Volts	20V MAX*	20V MAX*	20V MAX*
Cable Capacity	750 MCM CU / 1000 MCM AL	750 MCM CU / 1000 MCM AL	1590 ACSR / 750 MCM CU / 1000 MCM AL
Tool Weight	6.0 lbs	6.0 lbs	7.5 lbs
Charger / Batteries	Charger / (1) 20V MAX* XR Lithium Ion (2.0 Ah)	-	Charger / (1) 20V MAX* XR Lithium Ion (2.0 Ah)

CABLE CUTTING TOOL BLADES

CAT #	DESCRIPTION	MATERIAL	FOR USE WITH
DCE1501	Cable Cutting Tool Replacement Blade	Copper and Aluminum	DCE150
DCE1551	ACSR Cable Cutting Tool Replacement Blade	Copper, Aluminum, and ACSR	DCE155

CABLE STRIPPERS



20V MAX* XR® Cable Stripper Kit (THHN/XHHW)



20V MAX* XR® Cable Stripper (THHN/XHHW) (Tool Only)

SPECIFICATIONS	DCE151TD1	DCE151B
Volts	20V MAX*	20V MAX*
Range for THHN/XHHW CU	#6 to 750 MCM	#6 to 750 MCM
Range for THHN/XHHW AL	#6 to 900 MCM	#6 to 900 MCM
Depth of Strip	0 - 4"	0 - 4"
Adjustable LED Light	Yes	Yes
Tool Weight	1.8 lbs (tool only)	1.8 lbs
Charger / Batteries	Charger / (1) 20V MAX* XR Lithium Ion (2.0 Ah)	Sold Separately
Includes	(20) Bushings	

CABLE STRIPPING BUSHINGS

CAT #	BUSHING NAME	BUSHING
DCE1511	1/0 CU, 1/0 AL	B1
DCE1512	1/0 CU	B2
DCE1513	1/0-2/0 CU, 2/0 AL	B3
DCE1514	2/0 CU, 3/0 AL	B4
DCE1515	3/0 CU	B5
DCE1516	3/0 CU, 4/0 AL	B6
DCE1517	4/0 CU	B7
DCE1518	4/0-250 MCM CU, 250 MCM AL	B8
DCE1519	250 MCM CU, 300 MCM AL	B9
DCE15110	250-300 MCM CU, 300 MCM AL	B10
DCE15111	300 MCM CU, 350 MCM AL	B11
DCE15112	350 MCM CU, 400 MCM AL	B12
DCE15113	350-400 MCM CU, 400 MCM AL	B13
DCE15114	350-400 MCM CU	B14
DCE15115	500 MCM AL	B15
DCE15116	500 MCM CU	B16
DCE15117	500 MCM CU, 600 MCM AL	B17
DCE15118	500-600 MCM CU, 700 MCM AL	B18
DCE15119	600 MCM CU	B19
DCE15120	600 MCM CU, 700 MCM AL	B20
DCE15121	600-700 MCM CU, 750 MCM AL	B21
DCE15122	700 MCM CU	B22
DCE15123	700-750 MCM CU, 900 MCM AL	B23
DCE15124	750 MCM CU, 900 MCM AL	B24

THREADED ROD CUTTING TOOLS



20V MAX* Threaded Rod Cutter Kit



20V MAX* Threaded Rod Cutter (Tool Only)

SPECIFICATIONS	DCS350D1	DCS350B
Volts	20V MAX*	20V MAX*
Strokes/Min	30 SPM	30 SPM
Mild Steel Capacity	1/4"- 20, 3/8"- 16, 1/2"- 13	1/4"- 20, 3/8"- 16, 1/2"- 13
Stainless Steel Capacity	1/4"- 20, 3/8"- 16	1/4"- 20, 3/8"- 16
Hardened Steel Capacity	1/4"- 20, 3/8"- 16	1/4"- 20, 3/8"- 16
Tool Weight	9.6 lbs	8.8 lbs
Charger / Batteries	Charger / (1) 20V MAX* XR Lithium Ion (2.0 Ah)	Sold Separately
Includes	(20) Bushings	



THREADED ROD CUTTING TOOL ACCESSORIES

CAT #	DESCRIPTION
DCS3501	1/4", 3/8", 1/2" Cutting Die Set
DCS35038	3/8" Cutting Die Set
DCS35012	1/2" Cutting Die Set

DRAIN SNAKES



20V MAX* XR® Brushless Drain Snake Kit



20V MAX* XR® Brushless Drain Snake (Tool Only)

SPECIFICATIONS	DCD200D1	DCD200B
Volts	20V MAX*	20V MAX*
Drum Capacity	1/4" x 50', 5/16" x 50', 3/8" x 35'	1/4" x 50', 5/16" x 50', 3/8" x 35'
Included Cable	5/16" x 25'	5/16" x 25'
Compatible Pipe Sizes	Up to 3" Pipes	Up to 3" Pipes
Charger / Batteries	Charger / (1) 20V MAX* XR Lithium Ion (2.0 Ah)	Sold Separately

DRAIN SNAKE ACCESSORIES

CAT #	DESCRIPTION
DCD2000	Drain Snake Replacement Drum
DCD2005	5/16" x 25' Black Oxide Drain Cable with Bulb Head



GRINDERS FLEXVOLT[™]



FLEXVOLT[®] 60V MAX*
4-1/2" - 6" Angle Grinder Kit



FLEXVOLT[®] 60V MAX*
4-1/2" - 6" Angle Grinder Kit



FLEXVOLT[®] 60V MAX*
4-1/2" - 6" Angle Grinder (Tool Only)

SPECIFICATIONS	DCG414T2	DCG414T1	DCG414B
Volts	60V MAX*	60V MAX*	60V MAX*
No Load Speed	9,000 rpm	9,000 rpm	9,000 rpm
Spindle Lock	Yes	Yes	Yes
Spindle Thread	5/8"-11"	5/8"-11"	5/8"-11"
Tool Weight	6.96 lbs	6.96 lbs	4.66 lbs
Charger / Batteries	Charger / (2) 20V/60V MAX* Lithium Ion (6.0 Ah)	Charger / (1) 20V/60V MAX* Lithium Ion (6.0 Ah)	Sold Separately
Includes	Side Handle, 4.5" Type 27 Guard, 6" Type 27 Guard	Side Handle, 4.5" Type 27 Guard, 6" Type 27 Guard	Side Handle, 4.5" Type 27 Guard, 6" Type 27 Guard



GRINDERS



20V MAX* 4-1/2" (114 mm) / 5" (127 mm) Grinder Kit



20V MAX* 4-1/2" (114 mm) / 5" (127 mm) Grinder (Tool Only)



18V Cut-Off Tool (Tool Only)

SPECIFICATIONS	DCG412P2	DCG412B	DC411B
Volts	20V MAX*	20V MAX*	18V
No Load Speed	7,000 rpm	7,000 rpm	6,500 rpm
Spindle Lock	Yes	Yes	Yes
Spindle Thread	5/8"	5/8"	5/8" - 11
Weight	6.5 lbs	5.1 lbs	4.6 lbs
Charger/Batteries	Charger / (2) 20V MAX* XR Lithium Ion (5.0 Ah)	Sold Separately	Sold Separately
Includes	5" (125 mm) Type 27 guard, Wrench & 2-position side handle	5" (125 mm) Type 27 guard, Wrench & 2-position side handle	4-1/2" (115 mm) Type 1 guard, Wrench, (2) matched flanges & 2-position side handle



BAND SAWS



20V MAX*
Band Saw



20V MAX*
Band Saw (Tool Only)



20V MAX* XR® Brushless
Deep Cut Band Saw Kit



20V MAX* XR® Brushless
Deep Cut Band Saw (Tool Only)

SPECIFICATIONS	DCS371P1	DCS371B	DCS374P2	DCS374B
Volts	20V MAX*	20V MAX*	20V MAX*	20V MAX*
Ft/Min	570 fpm	570 fpm	490 fpm	490 fpm
Blade Length	32-7/8"	32-7/8"	44-7/8"	44-7/8"
Max Capacity	2-1/2"	2-1/2"	4-3/4"	4-3/4"
Tool Length	15"	15"	20-3/4"	20-3/4"
Weight	9.4 lbs	8.0 lbs	13.8 lbs	12.4 lbs
Charger/Batteries	Charger / (1) 20V MAX* XR Lithium Ion (5.0 Ah)	Sold Separately	Charger / (2) 20V MAX* XR Lithium Ion (5.0 Ah)	Sold Separately
Includes	14/18 blade, blade tracking wrench	14/18 blade, blade tracking wrench	18 blade, blade tracking wrench	18 blade, blade tracking wrench



18V Band Saw (Tool Only)

SPECIFICATIONS	DCS370B
Volts	18V
Ft/Min	570 fpm
Blade Length	32-7/8"
Max Capacity	2-1/2"
Tool Length	15"
Weight	7.7 lbs (tool only)
Charger/Batteries	Sold Separately
Includes	14/18 blade, blade tracking wrench

BI-METAL CORDLESS BANDSAW BLADES



CAT #	TPI	THK	LGTH	HT	PCK
DW3982C	14	.020"	32-7/8"	1/2"	3
DW3983C	18	.020"	32-7/8"	1/2"	3
DW3984C	24	.020"	32-7/8"	1/2"	3
DW3986C	14/18	.020"	32-7/8"	1/2"	3



ADHESIVE DISPENSERS



20V MAX* 300-600mL
Sausage Pack Adhesive Gun



20V MAX* 300-600mL Sausage Pack
Adhesive Gun (Tool Only)



20V MAX*
29oz Adhesive Gun



20V MAX*
29oz Adhesive Gun (Tool Only)

SPECIFICATIONS	DCE580D1	DCE580B	DCE570D1	DCE570B
Volts	20V MAX*	20V MAX*	20V MAX*	20V MAX*
Capacity	300-600mL sausage packs	300-600mL sausage packs	29oz cartridge	29oz cartridge
Anti-Drip	Yes	Yes	Yes	Yes
Variable Speed Trigger	Yes	Yes	Yes	Yes
Variable Speed Dial	Yes	Yes	Yes	Yes
Tool Free Canister Change	Yes	Yes	Yes	Yes
Max Speed	21 in/min	21 in/min	21 in/min	21 in/min
Weight	4.9 lbs	4.9 lbs	4.66 lbs	4.66 lbs
Charger / Batteries	Charger / (1) 20V MAX* XR Lithium Ion (2.0 Ah)	Sold Separately	Charger / (1) 20V MAX* XR Lithium Ion (2.0 Ah)	Sold Separately



20V MAX*
10oz Adhesive Gun



20V MAX*
10oz Adhesive Gun (Tool Only)

SPECIFICATIONS	DCE560D1	DCE560B
Volts	20V MAX*	20V MAX*
Capacity	10oz/300mL cartridge	10oz/300mL cartridge
Anti-Drip	Yes	Yes
Variable Speed Trigger	Yes	Yes
Variable Speed Dial	Yes	Yes
Tool Free Canister Change	Yes	Yes
Max Speed	21 in/min	21 in/min
Weight	4.06 lbs	4.06 lbs
Charger / Batteries	Charger / (1) 20V MAX* XR Lithium Ion (2.0 Ah)	Sold Separately

ADHESIVE GUN CONVERSION KITS



465mL Clear
Sausage Tube
Conversion Kit



600mL Clear
Sausage Tube
Conversion Kit

SPECIFICATIONS	DCE5802	DCE5801
Capacity	300-465mL	300-600mL
Includes	Plunging Rod, 2 Pistons, 465mL clear tube	Plunging Rod, 2 Pistons, 600ml clear tube

WORKLIGHTS



20V MAX* Tool Connect™ Corded/Cordless LED Area Light Kit



20V MAX* Tool Connect™ Corded/Cordless LED Area Light



18V/20V MAX* Cordless/Corded LED Worklight (Tool Only)



18V/20V MAX* LED Worklight (Tool Only)



20V MAX* LED Worklight (Tool Only)

SPECIFICATIONS

	DCL070T1	DCL070	DCL061	DCL060	DCL050
Volts	20V MAX*	20V MAX*	18V or 20V MAX* or AC/DC Power	18V or 20V MAX*	20V MAX*
Bulb	LED	LED	LED	LED	LED
Brightness	Up to 7,000 lumens	Up to 7,000 lumens	1500 lumens	1500 lumens	500 & 250 lumens
Run-Time	-	-	Up to 2.5 hrs	Up to 2.5 hrs	Up to 17 hrs.
Weight	29.3 lbs	27 lbs	3.27 lbs	3.27 lbs	2 lbs
Charger/Batteries	Charger / (1) 20V/60V MAX* Lithium Ion (6.0 Ah)	Sold Separately	Sold Separately	Sold Separately	Sold Separately



20V MAX* LED Hand Held Worklight



20V MAX* Jobsite LED Spotlight (Tool Only)



20V MAX* LED Worklight (Tool Only)



18V Flexible Floodlight (Tool Only)



18V Fluorescent Area Light (Tool Only)

SPECIFICATIONS

	DCL044	DCL043	DCL040	DW919	DC527
Volts / Power Source	20V MAX*	20V MAX*	20V MAX*	18V	18V
Bulb	LED	LED	LED	Bulb	Fluorescent
Brightness	160 lumens	1000 & 90 lumens	110 lumens	-	-
Run-Time	Up to 27 hrs	Up to 13.5 hrs	Up to 11 hrs	Up to 3 hrs	Up to 3.5 hrs
Weight	1.5 lbs	1.4 lbs (tool only)	1.0 lbs (tool only)	0.5 lbs (tool only)	1.2 lbs (tool only)
Charger/Batteries	Sold Separately	Sold Separately	Sold Separately	Sold Separately	Sold Separately



14.4V Pivoting Head Flashlight (Tool Only)



12V MAX* LED Worklight (Tool Only)



8V MAX* Worklight (Tool Only)



LED Replacement Bulb

SPECIFICATIONS

	DW906	DCL510	DCL023	DCL0900
Volts / Power Source	14.4V	12V MAX*	8V MAX*	9.6V - 36V
Bulb	Xenon bulb	LED	LED	LED
Brightness	-	130 lumens	80 lumens	110 lumens
Run-Time	Up to 3 hrs	Up to 4 hrs	Up to 5 hrs.	Up to 4 hrs
Weight	0.5 lbs (tool only)	0.5 lbs (tool only)	0.6 lbs (tool only)	0.2 lbs (tool only)
Charger/Batteries	Sold Separately	Sold Separately	Sold Separately	-

INSTRUMENTS



12V MAX* Infrared Thermometer Kit



12V MAX* Imaging Thermometer Kit

SPECIFICATIONS

	DCT414S1	DCT416S1
Volts	12V MAX*	12V MAX*
Temperature Range	-20° F to 932° F (-29° C to 500° C)	14° F to 480° F (-10° C to 250° C)
Field of View; Distance, Spot	(D:S) 12:1	(IFOV) 1" @ 39.3" (25 mm @ 1m)
Accuracy	+/-1.5% or +/- 1.5° C, whichever is greater, assumes ambient operating temperature	Below 200° F, +/-3.6° F, Above 200° F, +/-2%, assumes ambient operating temperature
Charger/Batteries	Charger / (1) 12V MAX* Lithium Ion	Charger / (1) 12V MAX* Lithium Ion
Includes	-	Micro SD card, Report writing software



12V MAX* (17 mm) Inspection Camera with Wireless Screen Kit



12V MAX* (9 mm) Inspection Camera with Wireless Screen Kit



12V MAX* (5.8 mm) Inspection Camera with Wireless Screen Kit

SPECIFICATIONS

	DCT410S1	DCT411S1	DCT412S1
Volts	12V MAX*	12V MAX*	12V MAX*
Camera Head Diameter	17 mm	9 mm	5.8 mm
Cable Length	3' waterproof	3' waterproof	3' waterproof
Screen Size	3.5"	3.5"	3.5"
Resolution	320x480 dpi	320x480 dpi	320x480 dpi
Zoom	3X	3X	3X
Charger/Batteries	Charger / (1) 12V MAX* Lithium Ion	Charger / (1) 12V MAX* Lithium Ion	Charger / (1) 12V MAX* Lithium Ion
Includes	17 mm - 3' camera cable, hook, & magnet	9 mm - 3' camera cable, hook, magnet, & mirror	5.8 mm - 3' camera cable

CHARGER/RADIOS



SPECIFICATIONS	DCR025	DCR015	DC012
Power Source	20V MAX* and 60V MAX* Battery	12V MAX* and 20V MAX* Battery	7.2V to 18V Battery
AM/FM Digital Tuner	Yes	Yes	Yes
Auxiliary/USB Charging Port	Yes	Yes	Yes
Charges batteries	Lithium Ion	Lithium Ion	NiCd & Lithium Ion
Weight	14.46 lbs (tool only)	13.2 lbs (tool only)	14.2 lbs (tool only)
NOTE	Does not work with 18V batteries and other stem pack batteries	Does not work with 18V batteries and other stem pack batteries	Does not work with 18V batteries and other stem pack batteries
Charger/Batteries	Sold Separately	Sold Separately	Sold Separately

RADIO ACCESSORY



SPECIFICATIONS	DCR002
Power Source	Internal Battery
	Stream music wirelessly from any Bluetooth® Device to most radios with an aux-in port up to 100 ft.

RADIOS/SPEAKERS



SPECIFICATIONS	DCR018	DCR006
Power Source	12V MAX* and 20V MAX* & 18V Battery	12V MAX* and 20V MAX* battery
AM/FM Digital Tuner	Yes	No
Auxiliary/USB Charging Port	Yes	Yes
Weight	6 lbs (tool only)	2.75 lbs
	Runs off AC or battery power only, radio does not charge batteries	Bluetooth capable, Runs off AC or battery power only

BATTERY ACCESSORY



SPECIFICATIONS	DCB090
Power Source	12V MAX* and 20V MAX*
State of Charge Indicator	Yes
USB	2
Weight	0.5 lbs

VACUUMS



SPECIFICATIONS	DCV517M1	DCV517B	DC515B
Volts	20V MAX*	20V MAX*	18V
Tank Size	1/2 Gallon	1/2 Gallon	1/2 gallon
Hose Diameter	1-1/4"	1-1/4"	1-1/4"
Hose Length	2.5'	2.5'	2.5'
Blower	No	No	No
Tool Weight	4.5 lbs	3.8 lbs	3.6 lbs (tool only)
Charger/Batteries	Charger / (1) 20V MAX* XR Lithium Ion (4.0 Ah)	Sold Separately	Sold Separately
Includes	High Efficiency Gore® HEPA Filter	High Efficiency Gore® HEPA Filter	High Efficiency Gore® HEPA Filter

FAN



SPECIFICATIONS	DCE511B
Airflow	500 CFM*
Tool Weight	6.7 lbs
IP Rating	IP54

*At maximum speed, per IEC 60879



SPECIFICATIONS	DCV580H	DCV581H
Volts	18V or 20V MAX*	18V or 20V MAX* or AC Power
Tank Size	2 gallon	2 gallon
Hose Diameter	1-1/4"	1-1/4"
Hose Length	5.0'	5.0'
Blower	Yes	Yes
Tool Weight	10 lbs (tool only)	10.5 lbs (tool only)
Charger/Batteries	Sold Separately	Sold Separately
Includes	High Efficiency Gore® HEPA Filter	High Efficiency Gore® HEPA Filter

TRACKING DEVICES



SPECIFICATIONS	DCE040	DCE041
IP Rating	-	IP68
Integrated Battery Life	3+ Years	3+ Years
Bluetooth® Range	Up to 100 ft	Up to 100 ft

20V MAX* XR[®] COMBO KITS



20V MAX* XR[®] 6-Tool Combo Kit



20V MAX* XR[®] 6-Tool Combo Kit



20V MAX* XR[®] 6-Tool Combo Kit



20V MAX* XR[®] 5-Tool Combo Kit

SPECIFICATIONS	DCK695P2	DCK684D2	DCK694P2	DCK594P2
Volts	20V MAX*	20V MAX*	20V MAX*	20V MAX*
Hammerdrill	DCD996	-	DCD996	DCD996
Impact Driver	DCF887	DCF887	DCF887	DCF887
Reciprocating Saw	DCS367	DCS367	DCS367	DCS367
Circular Saw	DCS570	DCS570	DCS570	DCS570
Drill/Driver	-	DCD791	-	-
Grinder	DCG413	-	-	-
Oscillating Multi-Tool	-	DCS355	DCS355	-
Worklight	DCL040	DCL040	DCL040	DCL040
Charger/Batteries	Charger / (2) 20V MAX* XR Lithium Ion (5.0 Ah)	Charger / (2) 20V MAX* XR Lithium Ion (2.0 Ah)	Charger / (2) 20V MAX* XR Lithium Ion (5.0 Ah)	Charger / (2) 20V MAX* XR Lithium Ion (5.0 Ah)
Includes	(2) belt hooks, 360 degree side handle, carbide tipped circular saw blade, type 1 guard, wrench, (2) matched flanges, 2-position side handle	(2) belt hooks, carbide tipped circular saw blade, universal accessory adaptor	(2) belt hooks, 360 degree side handle, carbide tipped circular saw blade, universal accessory adaptor	(2) belt hooks, 360 degree side handle, carbide tipped circular saw blade



20V MAX* XR[®] 4-Tool Combo Kit



20V MAX* XR[®] Hammerdrill and Reciprocating Saw Kit



20V MAX* XR[®] Rotary Hammer and Impact Driver Kit

SPECIFICATIONS	DCK494P2	DCK294P2	DCK233P2
Volts	20V MAX*	20V MAX*	20V MAX*
Hammerdrill	DCD996	DCD996	-
Impact Driver	DCF887	-	DCF887
Reciprocating Saw	DCS367	DCS367	-
Rotary Hammer	-	-	DCH133
Threaded Rod Cutter	-	-	-
Worklight	DCL040	-	-
Charger/Batteries	Charger / (2) 20V MAX* XR Lithium Ion (5.0 Ah)	Charger / (2) 20V MAX* XR Lithium Ion (5.0 Ah)	Charger / (2) 20V MAX* XR Lithium Ion (5.0 Ah)
Includes	(2) belt hooks, 360 degree side handle	(1) belt hook, 360 degree side handle	360 degree side handle, (1) belt hook



20V MAX* XR[®] Drywall Screwgun and Impact Driver Kit



20V MAX* XR[®] Drywall Screwgun and Impact Driver Kit



20V MAX* XR[®] Drywall Screwgun and Cut-Out Tool Kit



20V MAX* XR[®] Hammerdrill and Impact Driver Kit

SPECIFICATIONS	DCK267D2	DCK267M2	DCK263D2	DCK299D1T1
Volts	20V MAX*	20V MAX*	20V MAX*	20V MAX*
Hammerdrill	-	-	-	DCD996
Impact Driver	DCF887	DCF887	-	DCF887
Drywall Screwgun	DCF620	DCF620	DCF620	-
Cut-Out Tool	-	-	DCS551	-
Charger/Batteries	Charger / (2) 20V MAX* XR Lithium Ion (2.0 Ah)	Charger / (2) 20V MAX* XR Lithium Ion (4.0 Ah)	Charger / (2) 20V MAX* XR Lithium Ion (2.0 Ah)	Fast Charger / (1) 20V/60V MAX* Lithium Ion (6.0 Ah) / (1) 20V MAX* XR Lithium Ion (2.0 Ah)
Includes	(2) Belt Hooks	(2) Belt Hooks	(1) Belt Hook	(2) belt hooks, 360 degree side handle

20V MAX* XR® COMBO KITS

20V
XR
Lithium Ion



20V MAX* XR®
2-Tool Combo Kit

20V
XR
Lithium Ion



20V MAX* XR®
2-Tool Combo Kit

20V
XR
Lithium Ion



20V MAX* XR®
2-Tool Combo Kit



SPECIFICATIONS

	DCK287D2	DCK283D2	DCK299P2
Volts	20V MAX*	20V MAX*	20V MAX*
Hammerdrill	DCD796	-	DCD996
Drill/Driver	-	DCD791	-
Impact Driver	DCF887	DCF887	DCF887
Charger/Batteries	Charger / (2) 20V MAX* XR Lithium Ion (2.0 Ah)	Charger / (2) 20V MAX* XR Lithium Ion (2.0 Ah)	Charger / (2) 20V MAX* XR Lithium Ion (5.0 Ah)
Includes	(2) belt hooks and bit holder	(2) belt hooks	(2) belt hooks and 360° side handle

20V MAX* COMBO KITS

20V
Lithium Ion



20V MAX*
5-Tool Combo Kit

20V
Lithium Ion



20V MAX*
5-Tool Combo Kit

20V
Lithium Ion



20V MAX*
4-Tool Combo Kit

20V
Lithium Ion



20V MAX*
4-Tool Combo Kit

SPECIFICATIONS

	DCK592L2	DCK590L2	DCK492L2	DCK491L2
Volts	20V MAX*	20V MAX*	20V MAX*	20V MAX*
Hammerdrill	DCD985	DCD985	DCD985	DCD985
Circular Saw	DCS391	DCS393 (6-1/2")	-	DCS393 (6-1/2")
Reciprocating Saw	DCS380	DCS381	DCS380	DCS381
Impact Driver	DCF885	DCF885	DCF885	-
LED Worklight	DCL040	DCL040	DCL040	DCL040
Charger/Batteries	Charger / (2) 20V MAX* Lithium Ion (3.0 Ah)	Charger / (2) 20V MAX* Lithium Ion (3.0 Ah)	Charger / (2) 20V MAX* Lithium Ion (3.0 Ah)	Charger / (2) 20V MAX* Lithium Ion (3.0 Ah)
Includes	360° side handle, carbide tipped circular saw blade, & belt hook	360° side handle, carbide tipped circular saw blade, & belt hook	360° side handle & belt hook	360° side handle & carbide tipped circular saw blade

20V
Lithium Ion



20V MAX*
4-Tool Combo Kit

20V
Lithium Ion



20V MAX*
2-Tool Combo Kit

20V
Lithium Ion



20V MAX*
2-Tool Combo Kit

20V
Lithium Ion



20V MAX*
2-Tool Combo Kit

20V
Lithium Ion



20V MAX*
2-Tool Combo Kit

SPECIFICATIONS

	DCK490L2	DCK292L2	DCK290L2	DCK285C2	DCK280C2
Volts	20V MAX*	20V MAX*	20V MAX*	20V MAX*	20V MAX*
Hammerdrill	DCD985	DCD985	DCD985	DCD785	-
Drill/Driver	-	-	-	-	DCD780
Reciprocating Saw	DCS381	DCS380	-	-	-
Impact Driver	DCF885	-	DCF885	DCF885	DCF885
LED Worklight	DCL040	-	-	-	-
Charger/Batteries	Charger / (2) 20V MAX* Lithium Ion (3.0 Ah)	Charger / (2) 20V MAX* Lithium Ion (3.0 Ah)	Charger / (2) 20V MAX* Lithium Ion (3.0 Ah)	Charger / (2) 20V MAX* Lithium Ion (1.5 Ah)	Charger / (2) 20V MAX* Lithium Ion (1.5 Ah)
Includes	360° side handle & belt hook	360° side handle	360° side handle and belt hook	(2) belt hooks	(2) belt hooks

12V MAX* COMBO KITS

12V
Lithium Ion



12V MAX*
4-Tool Combo Kit

12V
Lithium Ion



12V MAX*
2-Tool Combo Kit

12V
Lithium Ion



12V MAX* Drill/Driver /
Impact Driver Combo Kit

12V
Lithium Ion



12V MAX* Screwdriver /
Impact Driver Combo Kit

SPECIFICATIONS

	DCK413S2	DCK212S2	DCK211S2	DCK210S2
Volts	12V MAX*	12V MAX*	12V MAX*	12V MAX*
Drill/Driver	DCD710	DCD710	DCD710	-
Impact Driver	DCF815	-	DCF815	DCF815
Screwdriver	-	-	-	DCF610
Reciprocating Saw	DCS310	DCS310	-	-
Worklight	DCL510	-	-	-
Charger/Batteries	Charger / (2) 12V MAX* Lithium Ion	Charger / (2) 12V MAX* Lithium Ion	Charger / (2) 12V MAX* Lithium Ion	Charger / (2) 12V MAX* Lithium Ion
Includes	Bit tip, (2) belt hooks, (1) wood cutting recip blade, (1) metal cutting recip blade	Belt hook, (1) wood cutting recip blade, (1) metal cutting recip blade	1 bit tip and (2) belt hooks	2 belt hooks and bit tips

18V COMBO KITS



18V XRP™ 9-Tool Combo Kit



18V XRP™ 6-Tool Combo Kit



18V XRP™ 6-Tool Combo Kit

SPECIFICATIONS	DCK955X	DCK675L	DCK655X
Volts	18V	18V	18V
Hammerdrill/Drill/Driver	DCD950	DCD970	DCD950
Circular Saw	DC390 (6-1/2")	-	DC390 (6-1/2")
Reciprocating Saw	DC385	DC385	DC385
Cut-Off Tool	DC411	DC411	DC411
Cut-Out Tool	DC550	-	-
Jig Saw	DC330	-	-
Impact Driver	DC825	DC827	DC825
Impact Wrench	DW059	DW059	-
Flexible Floodlight	DW919	DW919	DW919
Charger/Batteries	Charger / (2) 18V XRP™	NiCd/NiMH/Li-Ion Charger / (2) 18V XRP™ Lithium Ion	Charger / (2) 18V XRP™
Includes	360° side handle, carbide tipped circular saw blade, type 1 guard, wrench, (2) matched flanges, 2-position side handle	360° side handle, type 1 guard, wrench, (2) matched flanges, 2-position side handle	360° side handle, carbide tipped circular saw blade, type 1 guard, wrench, (2) matched flanges, (1) type 1 wheel & 2-position side handle



18V XRP™ 2-Tool Combo Kit

SPECIFICATIONS	DCK274L
Volts	18V
Hammerdrill/Drill/Driver	DCD775
Circular Saw	-
Reciprocating Saw	-
Impact Driver	DC827
Flexible Floodlight	-
Charger/Batteries	NiCd/NiMH/Li-Ion Charger / (2) 18V XRP™ Lithium Ion
Includes	-



18V XRP™ 2-Tool Combo Kit



18V XRP™ 2-Tool Combo Kit



18V Compact 4-Tool Combo Kit



18V Compact 2-Tool Combo Kit

SPECIFICATIONS	DCK255X	DCK251X	DCK425C	DCK265L
Volts	18V	18V	18V	18V
Hammerdrill/Drill/Driver	DCD950	DCD950	-	-
Drill/Driver	-	-	DC720	DCD760
Circular Saw	-	-	-	-
Reciprocating Saw	-	DC385	DW938	-
Impact Driver	DC825	-	DC825	DCF826
Flexible Floodlight	-	-	-	-
Pivot Head Flashlight	-	-	DW908	-
Charger/Batteries	Charger / (2) 18V XRP™	Charger / (2) 18V XRP™	Charger / (2) 18V	Charger / (2) 18V Compact Lithium Ion
Includes	360° side handle	360° side handle	-	-

60V LITHIUM ION 20V BATTERIES FLEXVOLT™



SPECIFICATIONS	DCB609	DCB606
Volts	20V MAX* / 60V MAX*	20V MAX* / 60V MAX*
Amp Hour	9 Ah / 3 Ah	6 Ah / 2 Ah
Watt Hour	180	120

PORTABLE POWER STATIONS™



1800 Watt Portable Power Station™ Charger Kit

1800 Watt Portable Power Station™ Charger

SPECIFICATIONS	DCB1800M3T1	DCB1800B
Compatible with	20V MAX*, 20V MAX* / 60V MAX*	20V MAX*, 20V MAX* / 60V MAX*
Power Out	1800W continuous, 3600W peak	1800W continuous, 3600W peak

20V LITHIUM ION 20V MAX* BATTERIES



SPECIFICATIONS	DCB206	DCB205	DCB204	DCB200	DCB203	DCB201
Volts	20V MAX*	20V MAX*	20V MAX*	20V MAX*	20V MAX*	20V MAX*
Amp Hour	6 Ah	5 Ah	4 Ah	3 Ah	2 Ah	1.5 Ah
Watt Hour	120	100	80	60	40	30

20V LITHIUM ION 20V MAX* TOOL CONNECT™ BATTERIES



SPECIFICATIONS	DCB205BT	DCB204BT	DCB203BT
Volts	20V MAX*	20V MAX*	20V MAX*
Amp Hour	5 Ah	4 Ah	2 Ah
Watt Hour	100	80	40

12V LITHIUM ION 8V MAX* BATTERIES



SPECIFICATIONS	DCB127	DCB120	DCB080
Volts	12V MAX*	12V MAX*	8V MAX*
Amp Hour	2 Ah	1.5 Ah	1 Ah
Watt Hour	24	18	8

CHARGERS



12V MAX* - 20V MAX* Dual Port Charger

12V MAX* - 20V MAX* & 7.2V-18V Charger

20V MAX* Fan Cooled Fast Charger

12V MAX* - 20V MAX* Charger

12V MAX* - 20V MAX* Vehicle Charger

8V MAX* Battery Charger

SPECIFICATIONS	DCB102	DCB103	DCB118	DCB115	DCB119	DCB095
Compatible with	20V MAX* / 60V MAX*, 20V MAX*, 12V MAX*	20V MAX* / 60V MAX*, 20V MAX*, 12V MAX*, 7.2V-18V	20V MAX* / 60V MAX*, 20V MAX*	20V MAX* / 60V MAX*, 20V MAX*, 12V MAX*	20V MAX* / 60V MAX*, 20V MAX*, 12V MAX*	8V MAX*

18 VOLT 18V BATTERIES, CHARGER & ADAPTERS



SPECIFICATIONS	DC9096	DC9096-2	DC9310	DCA1820	DCA2203C
Volts	18V XRP	18V XRP	7.2V - 18V Fast Charger	18V to 20V MAX* Adapter	18V to 20V MAX* Adapter
NOTE				NONCOMPATIBILITY: 18V Nailers, Chargers/Radios, SCS370 Band Saw	

