

05

INTERIOR LIGHTING

LUMIÈRES D'INTÉRIEUR

LÁMPARAS PARA INTERIOR

LED WHITELIGHT RECESSED-MOUNT 18" DOME LAMP




FEATURES & BENEFITS

- Robust, one-piece, aluminum housing and removable acrylic lens
- Built-in automatic thermal protection circuit



61291

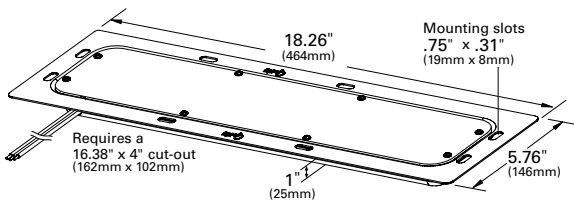

61261



61F61

Part Number	Product Description	Light Output (Usable)	Operating Temperature	Design Voltage (V)	Amp Draw (A)
61611	High output, 18 diodes	1200 Lm	-40°F to +122°F	12	2.16
61G21	High output, 18 diodes, w/ motion sensor	1200 Lm	-4°F to +122°F	12	2.16
61E61	High output, 18 diodes, dimmable	1200 Lm	-40°F to +122°F	12	2.17/.71
61111	High output, 16 diodes	1000 Lm	-40°F to +122°F	24	1
61261	Standard output, 10 diodes	800 Lm	-40°F to +122°F	12	1.75
61F61	Standard output, 10 diodes w/ motion sensor	800 Lm	-4°F to +122°F	12	1.75/.02
61881	Low output, 10 diodes	400 Lm	-40°F to +122°F	12	1.2
61291	Standard output, 6 diodes	940 Lm	-40°F to +122°F	12	1.7
61N11	Standard output, bi-volt, 6 diodes w/ motion sensor	940 Lm	-4°F to +122°F	12/24	1.7/.85
61H91	Standard output, 6 diodes w/ motion sensor	940 Lm	-4°F to +122°F	12	1.7/.02
61M11	Standard output, 6 diodes PIR / interconnected	940 Lm	-40°F to +122°F	12	1.7/.02
61J11	Standard output, 6 diodes, 4-wire, Hyundai®	940 Lm	-4°F to +122°F	12	.175

Accessories

Part Number	Description	Fits
94621	Replacement Lens	Round Corner Lenses
43540	Mounting Pan	All 18" Dome Lamps

Materials

Housing: Aluminum; Lens: Acrylic (61G21, 61F61, 61H91) Housing: Aluminum; Lens: Polycarbonate Finish: White

VMRS Code: 034-004-452

LED WHITELIGHT RECESSED-MOUNT INTERIOR DOME LAMP



FEATURES & BENEFITS

- LED lamp is rated to 50,000 service hours
- Fits existing similar incandescent lamp mountings
- Low heat; will not melt lens



61861






61931



61F51



82080

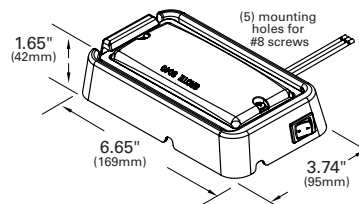

Part Number	Product Description	Designation	Lighting Technology	Connection Type	Light Output (Usable)	Design Voltage (V)	Amp Draw (A)
61861 MULTI	Gray Aluminum Housing, 6 Diodes	Dome	LED	Hardwire	300 Lm	12/24	.3 @ 12V .16 @ 24V
61991	Gray Aluminum Housing, 6 Diodes	Dome	LED	Hardwire	300 Lm	12	0.48
61871 MULTI	Gray Aluminum Housing, 3 Diodes	Courtesy	LED	Hardwire	150 Lm	9-30	.32 @ 9V .094 @ 30V
61931 MULTI	Gray Aluminum, Flange Mount Housing, 6 Diodes	Dome	LED	Hardwire	300 Lm	12/24	.3 @ 12V .16 @ 24V
82080 MULTI	Black Aluminum Housing, 3 White, 3 Red Diodes	Dome	LED	Tyco® #770331-1	150 Lm	10-30	.250 @ 12V .140 @ 24V
61F30 MULTI	Black Surface Mount Plastic Housing W/ Switch, 4 White, 4 Red Diodes	Dome	LED	Hardwire	200 Lm	10-32	.250 @ 12.8V .140 @ 25.6V
61F51	Black Surface Mount Plastic Housing W/ Switch, 6 White Diodes	Dome	LED	Hardwire	300 Lm	12	.480 @ 14V
61031	Gray Steel Housing	Dome	Incandescent	Hardwire	15 CP	12	1.1 @ 12V

Accessories

Part Number	Description	Fits
90401	Replacement Lens	All


VMRS Code: 034-004-083 - 61031
034-004-452 - 61861, 61991, 61871, 61931, 82080, 61F30, 61F51

LED WHITELIGHT 4" DOME LAMP



FEATURES & BENEFITS

- Shock-absorbing, weatherproof housing with long-life LEDs makes this a very durable lamp
- Cost-effective LED lighting option is rated at 50,000 hours
- LEDs utilize lower amp draw, putting less load on strained electrical systems
- Hardwired for easy integration into current wiring system
- Uses 70% less power than incandescent options

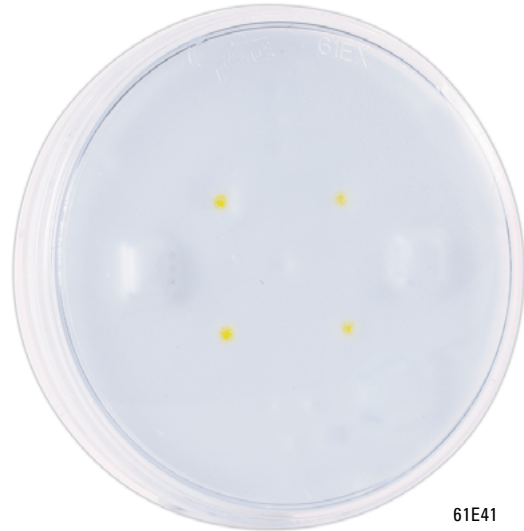


61E41




61H01



61171



61171



61E41


Part Number	Product Description	Lighting Technology	Light Output (Usable)	Connection Type	Design Voltage (V)	Amp Draw (A)
61H51	4" Integrated Flange	LED	400 Lm	Hardwire w/2-Way Female	12	.6A
61E41	4" Grommet Mount	LED	400 Lm	Male Pin	12	.6A
61H01	4" Grommet Mount	LED	400 Lm	Hardwire	12	.6A
61171	4" Surface Mount w/ Switch	LED	400 Lm	Hardwire	12	.6A

Accessories

Part Number	Description	Fits
67013, 66842, 66846, 67016	Male Pin Pigtail	61E41

VMRS Code: 034-004-452


LED

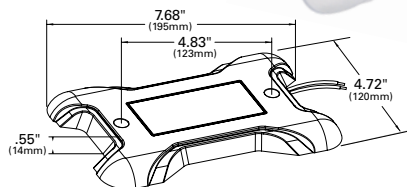**LED WHITELIGHT X-100 DOME LAMP**

Built-in automatic thermal protection circuit • Surface mountable; versatile design means both wall or ceiling mountings are possible
 • Fast installation with 2 self-tapping screws and no holes to cut

61121 White**Material:** Polycarbonate**Finish:** Clear**Volts / Amps:** 12V / .6A**VMRS Code:** 034-004-452

LED

**S100 LED WHITELIGHT SURFACE MOUNT DOME LAMP**

Low profile sleek design, less than 15 mm height • Moisture proof construction allows for a wide variety of uses • Surface mount allows for quick and easy installation • 560 lumens of output • Operates at -40°F to +122°F • ECE R10

61331 S100, 12V/24V w/ motion sensor

MULTI ECE

61341 S100, 12V/24V

MULTI ECE

Material: Polycarbonate**Finish:** White / Clear**Volts / Amps:** 12V, 24V / 0.6A at 14V, 0.3A at 24V**VMRS Code:** 034-004-452


LED

**4" ROUND FLANGE MOUNT LED DOME LAMP**

Hardwire terminations allow for easy connections to the existing wiring system • Chemical resistant acrylic lens, white powder-coated housing
 • Operates at a wide temperature range, from -40°F to +122°F

61141 White**Material:** Aluminum / Acrylic**Finish:** Clear**Volts / Amps:** 12V / .48A**VMRS Code:** 034-004-452

LED

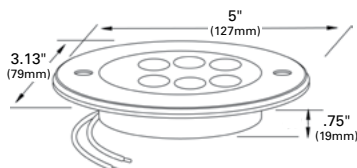**LED COMPARTMENT LAMP**

Shock and Vibration Proof • 50,000 hours of service life • Can be Recess or Surface Mounted • For Interior Use Only

61851 Clear, Push Lens for On/Off**61851-5** Clear, Push Lens for On/Off

RETAIL

Material: Polycarbonate**Finish:** black**Volts / Amps:** 12V

TORSION MOUNT® II 4" ROUND DOME LAMP

Gel-Mount® bulb cradle design • O-ring seal pigtail design eliminates corrosion • Locking tabs ensure secure pigtail connection • Hermetic lens-to-housing seal

61451 Clear, Male Pin
61051 Clear, Female Pin

Material: Polycarbonate

Finish: Clear

Bulb: 15 CP



Volts / Amps: 12V / 1.04A

Bracket: 43572, 43253, 92510, 92512, 92513

Grommet: 91740, 91950

Pigtail: Male Pin: 67013, 66842, 66846, 67016;
Female Pin: 67010, 67011, 67020, 67014

VMRS Code: 034-004-083



ROUND DOME LAMP WITH SWITCH

Surface mount lamp • Design resists corrosion and lens shattering due to heat build-up • Low profile to protect against knock-off by load or personnel

61161 White Base
61091 Chrome Base

Material: Polycarbonate

Finish: Clear


Bulb: 93, 15 CP

Volts / Amps: 12V / 1.04A

Pigtail: 68170

Lens: White 91101

VMRS Code: 034-004-083



6" SURFACE MOUNT DOME LAMP WITH SWITCH

Perfect for use as a compartment lamp • Popular lamp for bus and RV applications • Separate ground wire • Not suitable for use in headliners or confined spaces • Push button

61821 Clear


Material: Aluminum

Finish: Clear

Bulb: 1141, 21 CP

Volts / Amps: 12V / 1.44A

VMRS Code: 034-004-083

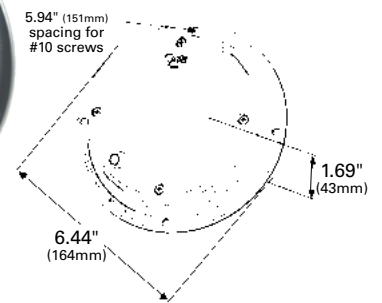

LED WHITELIGHT 7" ROUND DOME LAMP

High-output white LED dome lamp • Encapsulant potting for total circuit board protection against moisture and corrosion • Designed to operate in extreme-cold temperatures down to -40°F • Shallow recess requires only 1 1/4" depth for mounting pan • Self-resetting cut-off feature to protect against excess heat


61811 Clear


Material: Powder-Coated Steel / Acrylic

Finish: White / Clear

Volts / Amps: 12V / 1.92A

VMRS Code: 034-004-452

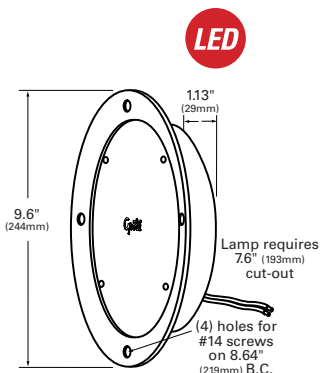

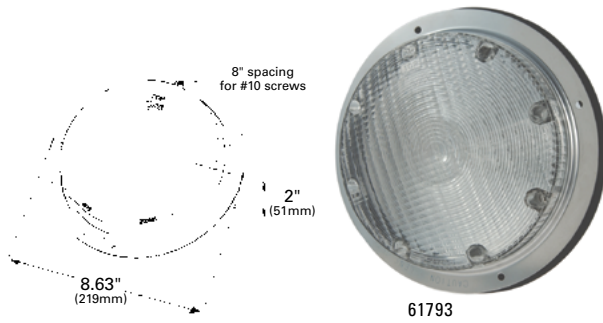

8" SURFACE MOUNT DOME LAMP

7" diameter lens • Separate ground wire • Popular for use as a "scare" lamp on RVs • Not suitable for use in headliners or confined spaces

61793 Clear, Stainless Steel Housing

Material: Steel

Finish: Stainless / White / Clear Lens

Bulb: 1156, 32 CP

Volts / Amps: 12V / 2.1A

VMRS Code: 034-004-083

LED



LED SLIMLITE COURTESY LAMP

Lamp features a low profile less than one inch • High efficiency lamp uses little power and generates minimal heat • Excellent option for cabinet lighting and other interior uses

60581 Clear

60591 Clear, w/ Switch


Material: Polycarbonate

Finish: Clear

Volts / Amps: 12V / .4A

VMRS Code: 034-004-068

LED

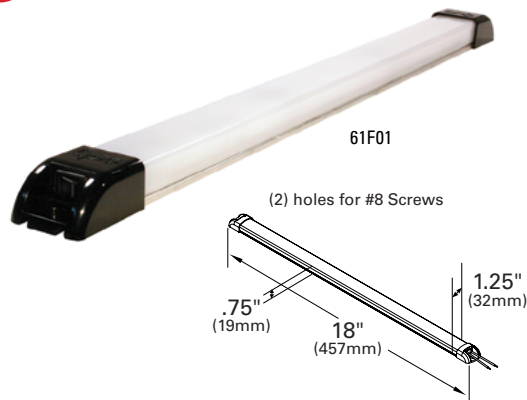

LED SLIMWHITE

High-output 500-lumen LED dome lamp emits low heat • Tough polycarbonate lens • Sturdy aluminum base • Profile is less than 3/4" high • Rated at 50,000 service hours • 61G01 multi-function, illuminate all, outer segments, or middle segment

18" LENGTH

61E81 500 Lm, Frosted

61E91 500 Lm, Frosted

61F01 500 Lm, Frosted, w/ Switch

24 VOLT

48" LENGTH

61281 1500 Lm, Frosted

61G01 2100 Lm, Clear, Multifunction

Material: Polycarbonate/ Aluminum


Finish: White

Volts / Amps: 18" 12V / .6A; 24V / .3A

48" 12V / 1.2A

VMRS Code: 034-004-068

LED

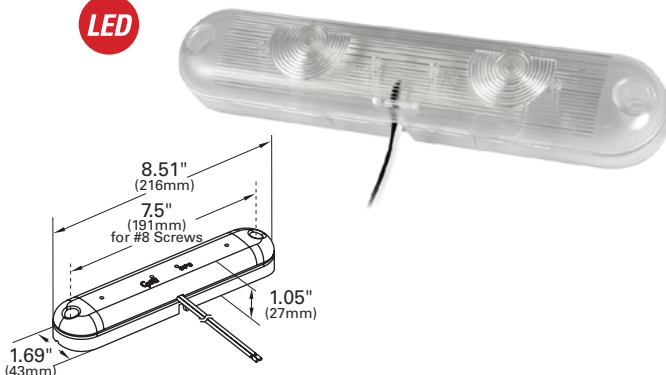

LED CABINET/COMPARTMENT DOME LAMP

Self-resetting cut-off switch to protect against excess current • Designed to operate in extreme cold temperatures down to -40°F • Encapsulant potting for total circuit board protection against moisture and corrosion • Optic lens design focuses light downward/upward based on orientation

61F81 Clear

Material: Polycarbonate

Regulations / Standards: SAE J575™

Finish: Clear

Volts / Amps: 12V / .35A

VMRS Code: 034-004-452

OVAL LED WHITELIGHT DOME LAMP

Grote® LEDs provide valuable light output with low amp draw
• Cost-effective LED lighting option is rated at 50,000 hours

61G31 Clear, Male Pin

Material: ABS / Acrylic

Standards: SAE J2139™

Finish: Clear

Volts / Amps: 12.8V / .6A

Bracket: (requires grommet or flange): 43362, 43952

Flange: 43220, 43223, 43222, 43723, 42153

Grommet: 92420, 92720

Pigtail: 67013, 66842, 66846, 67016

VMRS Code: 034-004-452



EUROSTYLE MAP & DOME LAMP

Three-way switch: map only, dome/map light, or off • Two options for wiring: either for dome to light or not to light, when door is open


61301 Clear

Material: Nylon / Polycarbonate

Finish: Black

Volts / Amps: Bulb: Dome - 561, 12 C.P.: 12 V / .97A; Bulb: Map - 1816, 3 C.P.: 12V / .33A

VMRS Code: 034-004-083

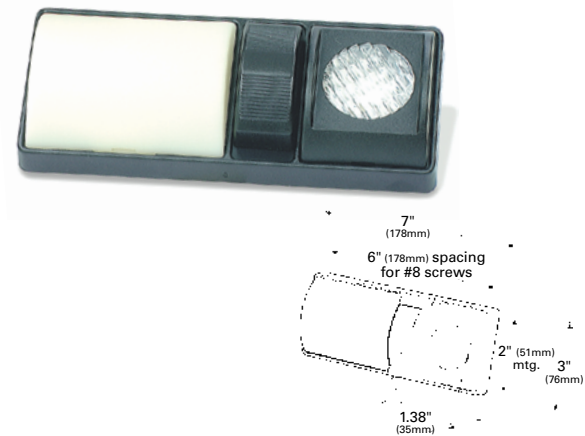

SQUARE DOME LAMP WITH SWITCH

Three-position switch enables variable intensity: low-6 CP, high-21 CP, or off
• Surface mount • Large enough to cover most existing holes


61221 Clear

Material: ABS/Polycarbonate

Finish: Clear

Volts / Amps: Bulb: 1016, 21/6 CP: 12V / 1.5A max

VMRS Code: 034-004-083

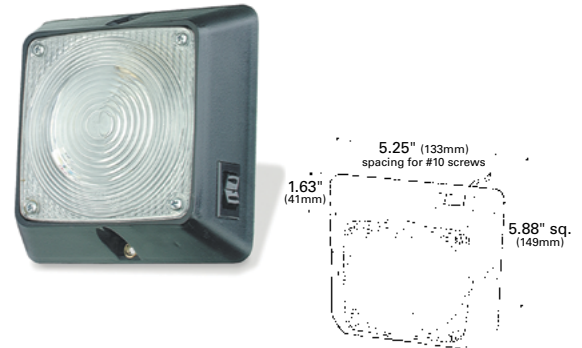

DOME LAMP WITH SWITCH

Durable polycarbonate lens • Integrated on/off toggle switch • Raised lens for maximum light dispersion • Comes with ground wire


61491-5 Clear **RETAIL**

Material: Steel / Polycarbonate


Finish: Clear

Volts / Amps: Bulb: 1156, 32 CP: 12V / 2.1A


VMRS Code: 034-004-083

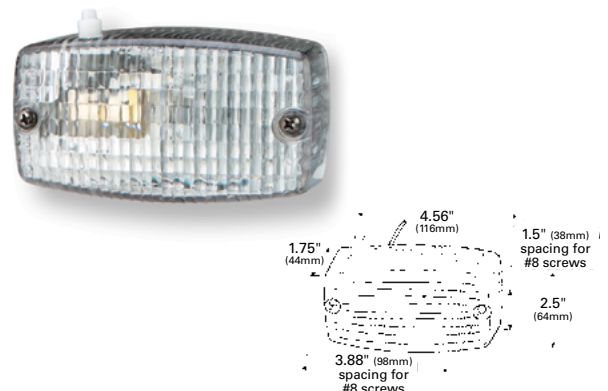

LED

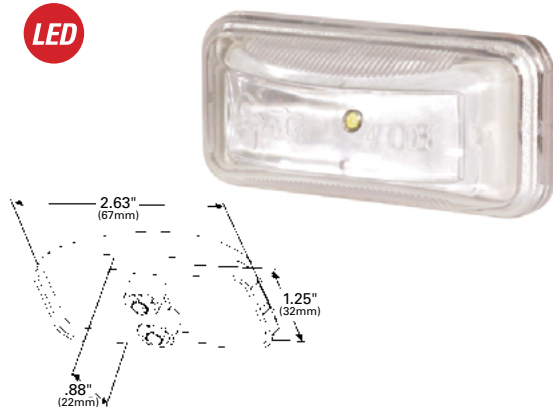**SMALL RECTANGULAR LED UTILITY LAMP**

Long-life LED light source makes this lamp the perfect choice for difficult-to-reach mounting locations • Uses same UBS pigtails as incandescent for a quick Plug-and-Go® retrofit

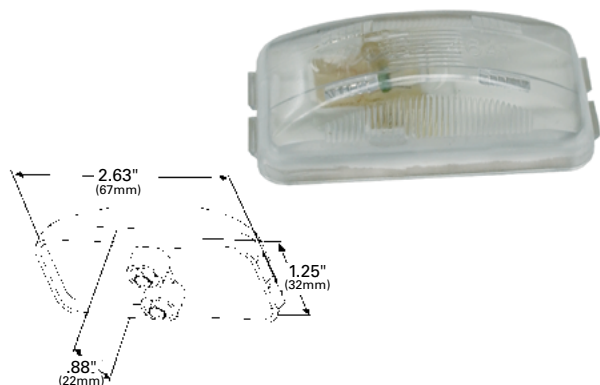60421 Clear**Material:** Polycarbonate**Finish:** Clear**Volts / Amps:** 12V / .2A**Bracket:** 43380, 43970, 43980**Pigtail:** 66850, 67050, 67001, 66851, 66800, 66840**Grommet:** 91380**VMRS Code:** 034-004-068**SMALL RECTANGULAR UTILITY LAMP**


Sonically sealed lens • Single 15,000-hour bulb

60271 Clear**Material:** Polycarbonate**Finish:** Clear**Bulb:** 2 CP**Volts / Amps:** 12V / .33A**Bracket:** 43380, 43970, 43980**Pigtail:** 66850, 67050, 67001, 66851, 66800, 66840**Grommet:** 91380**VMRS Code:** 034-002-068

LED

**RECTANGULAR LED UTILITY LAMP**

Long-life LED light source makes this lamp the perfect choice for difficult-to-reach mounting locations • Uses same UBS pigtails as incandescent for a quick Plug-and-Go® retrofit • Hermetic lens-to-housing seal

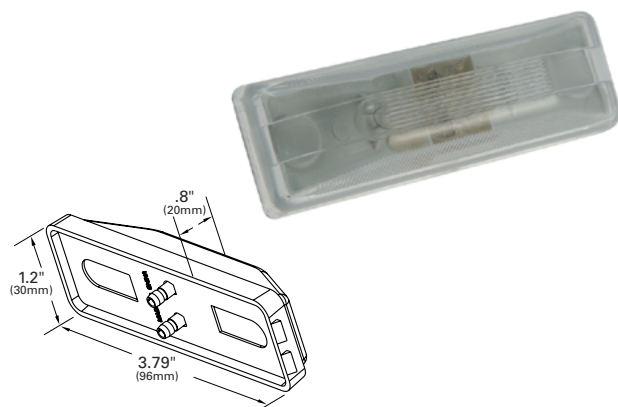60411 Clear**Material:** Polycarbonate**Finish:** Clear**Volts / Amps:** 12V / .2A**Bracket:** 43780, 43783, 43390, 43790, 43850**Pigtail:** 66982, 66980, 66981**VMRS Code:** 034-004-068**RECTANGULAR UTILITY LAMP**

Sonically sealed, rectangular double-bulb lamp • Designed for narrow mounting applications • 15,000-hour bulbs

60301 Clear**Material:** Polycarbonate**Finish:** Clear**Bulb:** 2 CP**Volts / Amps:** 12V / .66A**Bracket:** 43390, 43780, 43790, 43850, 43783**Pigtail:** 66981, 66982**VMRS Code:** 034-004-068

2" LED INTERIOR COURTESY LAMP

Bright, single LED provides ample light for tool boxes, cabinets, and other hard-to-light areas • Encapsulant potting for total circuit board protection against vibration and corrosion

60561 White

Material: Polycarbonate

Finish: Clear



Volts / Amps: 14V / .2A

Bracket: 43690, 43150, 43152, 43153, 43532

Grommet: 92120, 92150, 94100

Pigtail: 66851, 66850, 66840, 67001, 67050, 66801

VMRS Code: 034-004-068



TWO-BULB SQUARE CORNER UTILITY LAMP

Ideal courtesy or dome lamp • Attached pigtail with two stainless steel grounds

46791 Clear

Material: Polypropylene / Polycarbonate

Finish: Clear


Bulb: 1893 (2), 2 CP

Volts / Amps: 12V / .66A

Pigtail: 67120

Lens: 91961

VMRS Code: 034-004-068



2 1/2" ROUND UTILITY LAMP

Ideal for utility, courtesy or dome applications • Hermetic lens-to-housing seal • 15,000-hour bulb • Twist-on mounting

45811 Clear

Material: Polycarbonate

Finish: Clear

Bulb: 2 CP


Volts / Amps: 12V / .33A

Bracket: 43690, 43160, 43163, 43512, 43522

Grommet: 91880, 91890, 91400, 91410, 92070

Pigtail: 66851, 66850, 67001, 67050, 66801, 66800, 66840

VMRS Code: 034-004-068



STEPWELL UTILITY LAMP

Rugged, heavy-duty design • Brilliant chrome finish • Easy to install • Includes foam mounting pad

60351 Clear

Material: Die-cast / Polycarbonate


Regulations / Standards: FMVSS 108 / SAE L

Finish: Chrome


Bulb: 906, 6 CP

Volts / Amps: 12V / .7A

VMRS Code: 034-002-122



LED

**LED COURTESY STEPWELL LAMP**

Same mounting as popular incandescent versions • Designed to integrate into existing bus electronic platforms • ADA-compliant

60571 White


Material: Stainless Steel / Polycarbonate

Finish: Stainless

Volts / Amps: 14V / .3A

Lens: 93201

VMRS Code: 034-004-256

**COURTESY STEPWELL LAMP**

Bright, polished stainless steel construction • High-heat and impact-resistant lens • Adjustable hood for directional lighting • Bulb replaceable • Mounting pad and screws included

60361 Clear

Material: Stainless Steel / Polycarbonate


Finish: Stainless

Bulb: 1142, 21 CP

Volts / Amps: 12V / 1.34A

VMRS Code: 034-004-122

LED

**MICRONOVA® DOT LED COURTESY STEPWELL LAMP**

Durable one-piece LED lamp design • Hardwire with .180 slim-line UBS plug connections for maximum performance

60721 Lamp with Hooded Grommet

Material: Polycarbonate / PVC

Regulations / Standards: FMVSS 108 / SAE L


Finish: Clear/Black

Volts / Amps: 9-32V / .03A

Grommets: 94360

VMRS Code: 034-004-256

LED

**HI COUNT® LED COURTESY LAMP**

Mounts using two #6 screws • Longer life than incandescent; uses LED technology to reduce maintenance costs

G6261 Chrome-Plated Steel

G6261-5 Chrome-Plated Steel **RETAIL**

Material: Chrome-Plated Steel

Finish: Chrome

Volts / Amps: 12V / .02A

VMRS Code: 034-004-068

COURTESY LAMP

Chrome-plated steel housing • Single-bulb unit similar to lamps on Chevrolet®/GM® vehicles

60251 Clear
60251-5 Clear **RETAIL**

Material: Steel
Finish: Chrome
Bulb: 67, 4 CP
Volts / Amps: 12V / .59A
VMRS Code: 034-004-068



LED COMPACT COURTESY LAMP

Fits 1 1/4" hole in panels from 1/16" to 1/8" thick • Rubber-sealed spring and pigtail assembly • Translucent white plastic lens with chrome shade

G6121 Clear
G6121-5 Clear **RETAIL**

Material: Steel
Finish: Chrome
Volts / Amps: 12V / .02A
VMRS Code: 034-004-068




COMPACT COURTESY LAMP

Fits 1 1/4" hole in panels from 1/16" to 1/8" thick • Rubber-sealed spring and pigtail assembly • Translucent white plastic lens with chrome shade • Chassis ground

60101 Clear
60101-5 Clear **RETAIL**

Material: Steel
Finish: Chrome
Bulb: 67, 4 CP
Volts / Amps: 12V / .59A
Accessory: Socket Wire: 84-1003
VMRS Code: 034-004-068

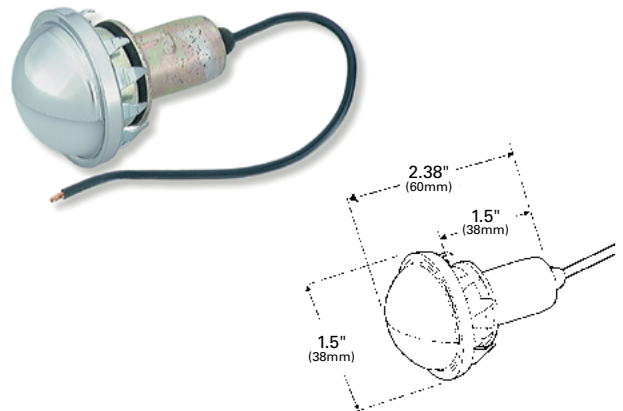



LED COURTESY LAMP

Illuminates instrument panel and compartments • Clear plastic lens

G6131 Clear
G6131-5 Clear **RETAIL**

Material: Steel
Finish: Chrome
Volts / Amps: 12V / .002A
VMRS Code: 034-004-068

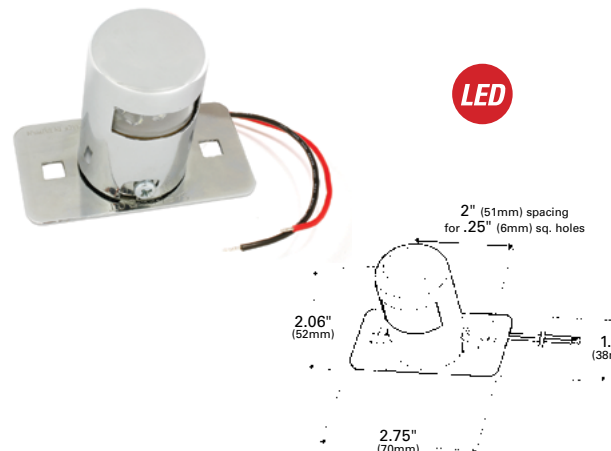

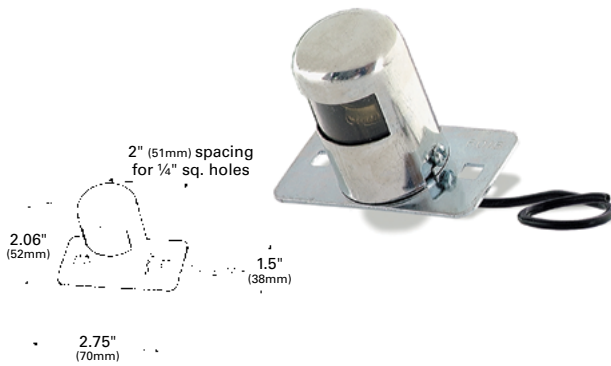**ECONOMY COURTESY LAMP**

Illuminates instrument panel and compartments • Clear plastic lens
• Chassis ground

60151 Clear

60151-5 Clear **RETAIL**

Material: Steel


Finish: Polished Chrome

Bulb: 67, 4 CP

Volts / Amps: 12V / .59A

Pigtail: 68080

VMRS Code: 034-004-068

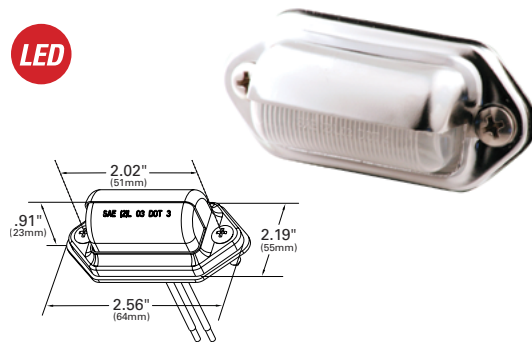LED**HI COUNT® INTERIOR/UTILITY LAMP**

LED offering provides maximum lighting output in tight spaces • Low power consumption and heat production • Hooded guard to reduce glare

G6151 Clear


G6151-5 Clear **RETAIL**

Material: Steel / Polycarbonate

Finish: Chrome

Volts / Amps: 12V / .025A

VMRS Code: 034-004-068

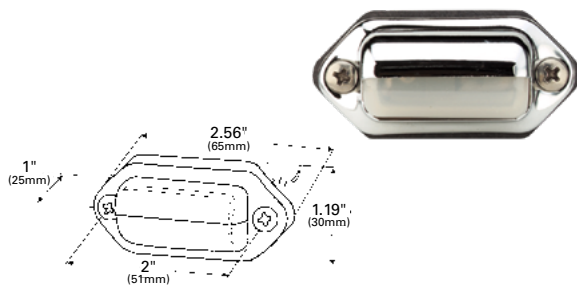**INTERIOR/UTILITY LAMP**

Chrome-plated housing • Hooded guard to reduce glare • Separate ground wire

61501 Clear

61501-5 Clear **RETAIL**

Material: Brass / Polycarbonate

Finish: Chrome

Bulb: 194, 2 CP

Volts / Amps: 12V / .27A

VMRS Code: 034-004-068

LED**LED ROPE LIGHTING**

Flexible rope lighting is perfect for compartments and tool boxes

• 50' roll comes with 10 wire connectors, 50 mounting clips and 10 end caps • 1/2" diameter rope • LEDs spaced one per inch

60481 White

Finish: Clear

Volts / Amps: 12V / .07A per foot

VMRS Code: 034-004-068

AUTOMATIC ELECTRONIC DOME LIGHT SWITCH WITH TIMER

Reduces the overall number of components of an interior lighting system

- Eliminates tapping into the air brake delivery system
- Automatic shut down of circuit for no-fuss on/off
- Allows for multiple, simple ground-sensing switches while maintaining the integrity of the interior lighting system
- Timer is factory pre-set for 40 minutes on-time and can be manually shut off or automatically when the vehicle experiences forward/backward acceleration
- Operates at -40C° to +85C°
- Four-wire design
- Designed to replace Grote® part number 44360

44440 Dome Lamp Switch


Material: Nylon / G.F., UL94HB / Polycarbonate

Standards: SAE J1455™, J2139™, IP65

Finish: Gray

Volts / Amps: 9–16V / 15A max load

VMRS Code: 034-004-014

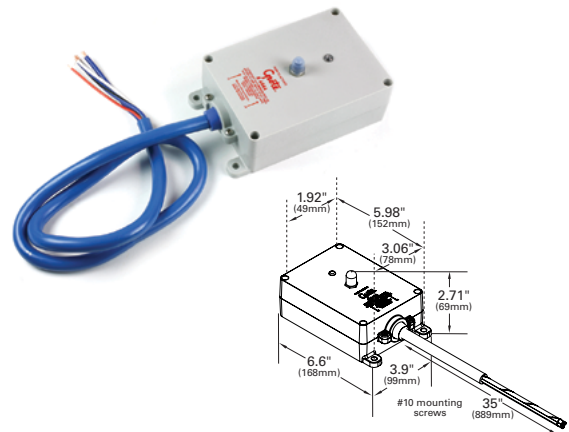

ELECTRONIC DOME LAMP SWITCH

Solid-state electronic circuitry

- Impact resistant PVC construction
- Sealed trigger switch
- High current-switching capacity of 30 amps, not to exceed 15 operating amps
- Wide voltage range: 9 to 16 volts
- Three-wire design
- Designed to replace Grote® part number 44240

44910 Full Feature, Surface Mount MULTI

Material: PVC


Standards: IP65

Finish: Gray

Volts / Amps: 9–14V / .9A max

Accessory: Automotive style 15A fuse

VMRS Code: 034-004-014

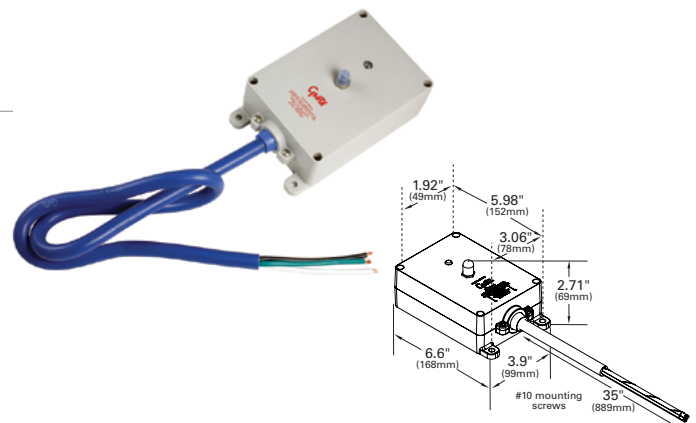

RECESSED MOMENTARY GROUND SWITCH

Simple switch to reset the timer function of standard "outside-the-trailer" switches

- Recessed into the trailer wall to eliminate bumps and knock-offs
- Easy to integrate into the current system
- For use with 44360, 44440 and 44190 switches

44380 Switch


Material: ABS

Standards: SAE J575e™ 1970

Finish: White

Volts: .02V–30V (D.C)

VMRS Code: 034-004-093

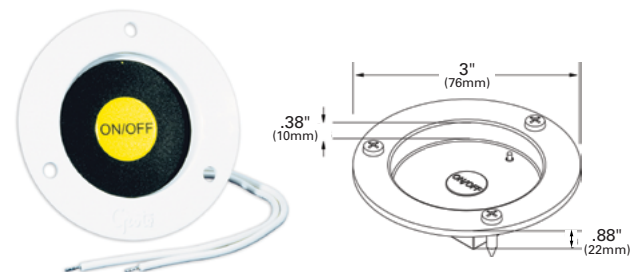

ECONOMY FULL-FEATURE TIMER SWITCH

Solid-state, low profile design

- Two-hour timer
- Fully potted for protection against moisture
- 5-amp, field-replaceable blade fuse


44242 Switch

Material: Polycarbonate

Finish: Gray

Volts: 10–14V

VMRS Code: 034-004-093

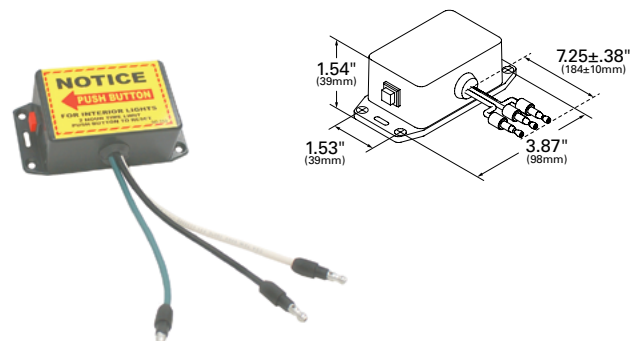

FEMALE PIN CLEARANCE MARKER PIGTAILS

For more information on pigtail products see **Pigtails** section: page 254

SEALED MARKER LAMP PIGTAILS

DOUBLE SEAL:

- 67001** 6" Long, Ring Terminal Ground, Blunt Cut Wire
- 66850** 6" Long, Chassis Ground
- 66851** 6" Long, Ground Return

SINGLE SEAL:

- 66801** 6" Long, Ground Return
- 67050** 6" Long, Ring Terminal Ground, Blunt Cut Wire
- 67050-5** 6" Long, Ring Terminal Ground, Blunt Cut Wire RETAIL
- 66840** 6" Long, Chassis Ground, Standard .180 Male
- 66800** 6" Long, Chassis Ground, Slim-Line .180 Male



2 PIN, MALE PIN CLEARANCE MARKER PIGTAILS

CLEARANCE / MARKER PIGTAILS

- 66980** 6" Long, Chassis Ground, Slim-Line .180 Male
- 66981** 6" Long, Universal Replacement, Blunt Cut, Ring Terminal Grommet
- 66982** 8" Long, Ground Return



PIGTAILS FOR 4" ROUND & 6" OVAL LAMPS

SINGLE FUNCTION TWO-WIRE PLUG-IN PIGTAILS FOR MALE PIN LAMPS

- 67013** 11" Long, Chassis Ground, Blunt Cut Wire
- 66842** 10" Long, Chassis Ground, Slim-Line .180 Male



SINGLE FUNCTION TWO-WIRE 90° PLUG-IN PIGTAILS FOR MALE PIN LAMPS

- 66846** 10" Long, Chassis Ground, 90° Plug, Slim-Line .180 Male
- 67016** 11" Long, Chassis Ground, 90° Plug, Blunt Cut Wires




TWO-WIRE PLUG-IN PIGTAILS FOR FEMALE-PIN LAMPS

STRAIGHT:

- 67010** 11 1/2" Long, Chassis Ground, Blunt Cut
- 67011** 10 1/4" Long, Chassis Ground, Standard .180 Male

90° PLUG:

- 67014** 10" Long, Chassis Ground, Blunt Cut
- 67020** 10" Long, Ground Return, Slim-Line .180 Male

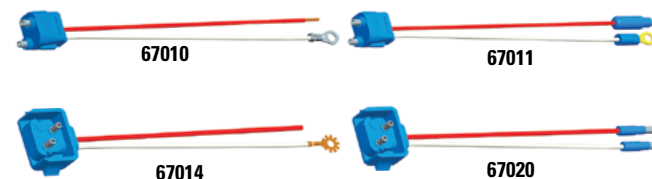

PIGTAILS

For more information on pigtail products see **Pigtails** section: page 254

MARKER LAMP PIGTAIL

67120 7 3/4" Long, .180 Slim-Line Male



67120

REPLACEMENT LAMP SOCKET PIGTAILS

68170 9 1/2" Long Single Contact



68170

3" LAMP MOUNTING

For more information on mounting products see **Mounting Options** section: page 264



GROMMET FOR SMALL RECTANGULAR LAMPS

91380 Black

Material: PVC
Finish: Black



HEADER-MOUNT BRACKET FOR SMALL RECTANGULAR LAMPS

KITS:

43380 White (42141 + 67050)

Material: Polycarbonate
Finish: White



BRACKET KITS FOR SMALL RECTANGULAR LAMPS


43970 Gray (+ 67050 pigtail)

43980 Chrome-Plated (+ 67050 pigtail)

Material: Polycarbonate/ABS
Finish: Chrome/Gray



3" – 5" LAMP MOUNTING



MOUNTING BRACKET FOR LARGE RECTANGULAR LAMPS

43780 Gray Bracket

43783 Chrome-Plated Bracket, ABS

KITS:

43390 Gray (43780 + 66981)

43790 Gray (43780 + 66980)

Material: Polycarbonate/ABS
Finish: Gray/Chrome



LOW PROFILE MOUNTING BRACKET

43850 Gray

Material: Polycarbonate
Finish: Gray

2" & 2½" LAMP MOUNTING

For more information on mounting products see **Mounting Options** section: page 264



RECESSED MOUNTING GROMMET FOR 2" ROUND LAMPS

- 92120** Open Grommet
92150 Closed Back Grommet

KITS:

- 94100** Open Grommet (92120 + 67050)

Material: PVC
Finish: Black



THEFT-RESISTANT MOUNTING FLANGE FOR 2" ROUND LAMPS

- 43150** Gray, Polycarbonate
43152 Black, Polycarbonate
43153 Chrome-Plated, ABS


Material: Polycarbonate/ABS
Finish: Gray/Black/Chrome



RECESSED MOUNTING GROMMET FOR 2½" ROUND LAMPS

- 91400** Open Grommet
92070 Closed Back Grommet


Material: PVC
Finish: Black



THEFT-RESISTANT MOUNTING FLANGE FOR 2½" ROUND LAMPS

- 43160** Gray, Polycarbonate
43163 Chrome-Plated, ABS

Material: Polycarbonate/ABS
Finish: Gray/Chrome



RECESSED MOUNTING GROMMET FOR 2½" ROUND LAMPS

- 91410** Open Grommet

Material: PVC
Finish: Black



90° ANGLE MOUNTING BRACKET FOR 2" AND 2½" ROUND LAMPS


FOR 2 1/2" LAMPS:

- 43512** Accommodates 94010, 91400, 92070 Grommets (2 25/32" Hole)
43522 Accommodates 94000, 91410 Grommets (3" Hole)

FOR 2" LAMPS:

- 43532** Accommodates 94100, 92120, and 92150 Grommets (2 5/16" Hole)


Material: Steel
Finish: Black Enamel



45° ANGLED BEVELED-EDGE RECESSED MOUNTING GROMMET FOR 2½" ROUND LAMPS

- 91880** Open Grommet


Material: PVC
Finish: Black



TWIST-IN SURFACE MOUNT BRACKET FOR 2" AND 2½" ROUND LAMPS

- 43690** Gray

Material: Polycarbonate
Finish: Gray



SURFACE MOUNT GROMMET FOR 2½" ROUND LAMPS

- 91890** Open Grommet

Material: PVC
Finish: Black

MICRONOVA® LAMP MOUNTING



HOODED MICRONOVA® DOT GROMMET

- 94360** Black

Material: PVC
Finish: Black

4" LAMP MOUNTING

For more information on mounting products see **Mounting Options** section: page 264



RECESSED MOUNTING GROMMET FOR 4" ROUND LAMPS

91740 Grommet


Material: PVC
Finish: Black



THEFT-RESISTANT MOUNTING FLANGE FOR 4" ROUND LAMPS

92510 White, Polycarbonate
92512 Black, Polycarbonate
92513 Chrome-Plated, ABS
92511 Gray, Polycarbonate
43253 Stainless Steel

Material: Polycarbonate; Stainless Steel; ABS



ANGLED MOUNTING BRACKET FOR 4" ROUND LAMPS

43572 Black, 90° angle bracket

Material: Steel
Finish: Black Powder-Coated
Grommet: 91740

6" LAMP MOUNTING



RECESSED MOUNTING GROMMET FOR 6" OVAL LAMPS

92420 Open Grommet
92720 Closed Back Grommet

Material: PVC
Finish: Black



"Z" MOUNTING BRACKET FOR 6" OVAL LAMPS

43952 Black

Material: Steel
Finish: Black
Grommet: 92420



ANGLED MOUNTING BRACKET FOR 6" OVAL LAMPS

43362 Black, 90° angle bracket

Material: Steel
Finish: Black
Grommet: 92420

REPLACEMENT LENSES

LENS MODEL NUMBER	FITS LAMP
90401	61031
	61861
	61991
	61871
	61931
91961	46791



90401



91961

GM® is a registered trademark of General Motors LLC; Chevrolet® is a registered trademark of General Motors LLC. Hyundai® is a registered trademark of HYUNDAI MOTOR COMPANY; Tyco® is a registered trademark of Tyco International Services GmbH LIMITED LIABILITY COMPANY SWITZERLAND;

All product and company names are trademarks™ or registered® trademarks of their respective holders. Use of them does not imply any affiliation with or endorsement by them.