

# Swivels - Guns & wand assemblies

## Parts

### Swivel

- 5000 psi maximum
- 400°F maximum
- greasable
- dimensions of 1/2" FNPT x 1/2" FNPT x 90°
- Viton seal



HR-99278541 ..... Swivel  
 HR-99360389 ..... Repair kit

## Parts

### Swivel for AU-HR38100 & AU-HR38200 hose reel

- 4000 psi maximum
- 225°F maximum (for cold water only)
- dimensions of 1/2" MNPT x 3/8" FNPT x 90°



AU-HR38GSW ..... Swivel  
 AU-HR38GSWK ..... Repair kit

## Accessories

### Gun and wand - Cold water - Couplers

- Industrial guns with comfortable handle



MS-GUN24QC1 ..... Accessories ..... With gun AU-DG4000, 24", 2750 psi  
 MS-GUN36QC1 ..... Accessories ..... With gun AU-DG4000, 36", 2750 psi  
 MS-GUN48QC1 ..... Accessories ..... With gun AU-DG4000, 48", 2750 psi  
  
 MS-GUN24QC2 ..... Accessories ..... With gun AU-ST15005, 24", 4000 psi  
 MS-GUN36QC2 ..... Accessories ..... With gun AU-ST15005, 36", 4000 psi  
 MS-GUN48QC2 ..... Accessories ..... With gun AU-ST15005, 48", 4000 psi  
 MS-GUN60QC2 ..... Accessories ..... With gun AU-ST15005, 60", 4000 psi  
 MS-GUN79QC2 ..... Accessories ..... With gun AU-ST15005, 79", 4000 psi

## Accessories

### Guns and insulated wand - Hot water - Twist connect coupler

- Industrial guns with comfortable handle



MS-GUN36QC2H ..... Accessories ..... With gun AU-ST15005, 36", 4000 psi  
 MS-GUN48QC2H ..... Accessories ..... With gun AU-ST15005, 48", 4000 psi  
 MS-GUN79QC2H ..... Accessories ..... With gun AU-ST15005, 79", 4000 psi

## Accessories

### Guns and dual wand



MS-GUN38QC1 ..... Accessories ..... With gun AU-ST15005, 38", 4000 psi - Cold water - Quick disconnect  
 MS-GUN38QC1H ..... Accessories ..... With gun AU-ST15005, 38", 4000 psi - Hot water - Twist disconnect

**Accessories**

**Industrial gun**

Industrial gun, comfortable grip, for cold water washers only.

- front inlet
- 4000 psi maximum
- 8 gpm maximum
- 3/8" FNPT inlet
- 1/4" FNPT outlet



AU-DG4000

**Accessories**

**Industrial gun heavy-duty (GIANT)**

Heavy-duty industrial gun, thin and comfortable grip.

- 5000 psi maximum
- 10 gpm maximum
- 300°F maximum
- 3/8" FNPT inlet
- 1/4" FNPT outlet



AU-GI21290B

**Accessories**

**Industrial gun (SUTTNER)**

Industrial gun, thin and comfortable grip.

- 5000 psi maximum
- 10.4 gpm maximum
- 300°F maximum
- 3/8" FNPT inlet
- 1/4" FNPT outlet



AU-ST15005

**Accessories**

**Industrial gun (SUTTNER)**

Industrial gun with "relax-action trigger", reducing trigger holding force up to 60%. All stainless steel components.

- 5000 psi maximum
- 12 gpm maximum
- 300°F maximum
- 3/8" FNPT inlet
- 1/4" FNPT outlet



AU-ST2700SS

**Accessories**

**Industrial gun weep**

"Weep" industrial gun for car wash

- 4000 PSI maximum
- 12 GPM maximum
- 300°F maximum
- "Weep" anti-freeze dripping when close
- 3/8" FNPT inlet
- 1/4" FNPT outlet



AU-ST1500W

**Accessories**

**Industrial gun (SUTTNER)**

Industrial gun with "relax-action trigger", reducing trigger holding force up to 60%.

- 5000 psi maximum
- 12 gpm maximum
- 300°F maximum
- 3/8" FNPT inlet
- 1/4" FNPT outlet



AU-ST2605

**Accessories**

**Industrial gun (SUTTNER)**

Horizontal industrial gun, ideal for overhead applications.

- 4000 psi maximum
- 12 gpm maximum
- 300°F maximum
- 3/8" FNPT inlet
- 1/4" FNPT outlet



AU-ST601

**Accessories**

**Industrial gun (SUTTNER)**

Industrial gun, thin and comfortable grip. For hot water.

- front inlet
- 3000 psi maximum
- 8 gpm maximum
- 320°F maximum
- 3/8" FNPT inlet
- 1/4" FNPT outlet



AU-ST810

All operators should read the owner's manual outlining warranty safety and maintenance recommendations before attempting to operate any machine. Please read and pay attention to all safety recommendations contained in the manual and those labeled on the machine.

**We Simplify Your Work!**

# Wands

## Accessories

### Wand

- 48" insulated wand
- 1/4" stainless steel
- 5800 psi
- 1/4" MNPT inlet
- 1/4" MNPT outlet



AU-ST002

## Accessories

### Dual wand

- 38" insulated dual wand
- 1/4" plated steel
- side handle
- 4000 psi / 300°F
- 1/4" MNPT inlet
- 1/4" MNPT outlet



AU-ST54

MS-ST54K..... PARTS - Repair Kit

## Accessories

### Stainless steel dual wand

- Insulated dual wand
- 1/4" stainless steel
- side handle
- 3000 psi / 300°F
- 1/4" MNPT inlet
- 1/4" FNPT outlet



AP-368155


AP-368165

AP-109490

## Accessories

### Dual wand

- 43" insulated dual wand
- 1/4" plated steel
- fixed side handle
- 3650 psi / 320°F
- 1/4" MNPT inlet
- 1/4" FNPT outlet
- injection control on top

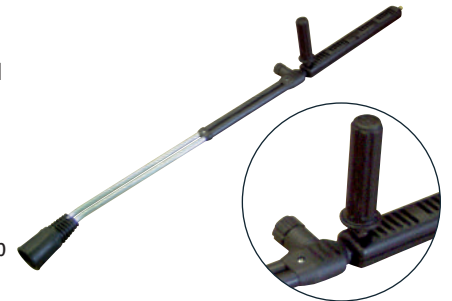

JB-LL1090V

## Accessories

### Flexible wand

- 18" flexible wand ideal wand for cleaning around the vehicle's wheels in car washes
- 1/4" MNPT inlet
- 1/8" FNPT outlet
- 2250 psi maximum
- 10 gpm maximum




JE-5200 .....\$59.99

## Accessories

### Steam wand

- Single piece wand, permanent opening, barrel and vented grig
- 38" length
- 1/2" FNPT inlet
- 3/8" FNPT outlet

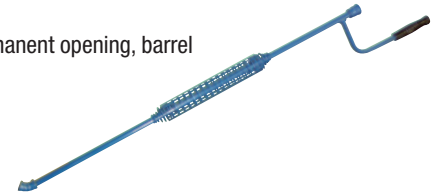

AU-3185

AU-3002 (nozzle)

## Accessories

### Plated steel wands

#### Insulated wands

- 1/4" plated steel
- 4000 psi
- insulated
- 1/4" MNPT inlet
- 1/4" MNPT outlet

AP-L24J ..... 24" wand, 1 section

AP-L36J ..... 36" wand, 1 section

AP-L48J ..... 48" wand, 1 section

AP-L60J ..... 60" wand, 1 section

AP-L79J ..... 79" wand, 1 section

AP-L36J2 ..... 36" wand, 2 sections

AU-200009600..... Accessories .....Side handle for 1/4" x 24" and 36" wand

AU-200009700..... Accessories .....Side handle for 1/4" x 48" and 79"wand

MS-L48SH..... Accessories .....Stainless steel side handle for AP-L48J, AP-L60J and AP-L79J wand

JE-5151 ..... Accessories .....1/4" FNPT adaptator for 1/4" outlet wand with rubber protector




# Swivels

## Accessories

### Swivel (Cold water)

To be installed at gun inlet.

- 3000 psi maximum
- 200°F maximum
- brass and stainless steel
- 3/8" FNPT inlet
- 3/8" MNPT outlet

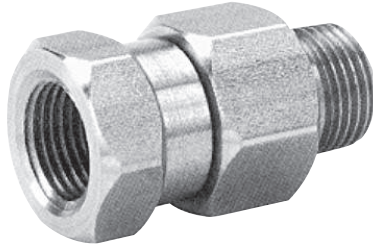


JE-7080

## Accessories

### Swivel (Cold water)

To be installed at gun inlet.

- 4000 psi maximum
- 200°F maximum
- stainless steel
- 3/8" FNPT inlet
- 3/8" MNPT outlet

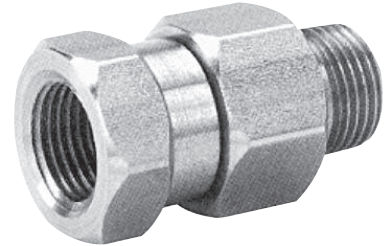

JE-7044

## Accessories

### Swivel (Cold water)

To be installed at gun inlet.

- 3000 psi maximum
- 200°F maximum
- brass
- 3/8" FNPT inlet
- 3/8" MNPT outlet




JB-15950BR

## Accessories

### Swivel (Hot water)

Swivel on bearing to be installed at end of hose at gun.

- 7250 psi maximum
- 300°F maximum
- steel-brass
- 3/8" FNPT inlet
- M22 x 1.5 outlet

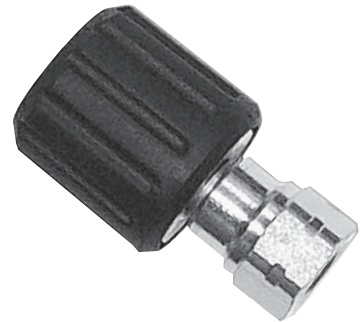

AU-ST44F .....Accessories

MS-ST44K .....Repair kit

## Accessories

### Swivel (Hot water)

Swivel on bearing to be installed at gun outlet.

- 7250 psi maximum
- 300°F maximum
- steel-brass
- 1/4" MNPT inlet
- M22 x 1.5 outlet



AU-ST44 .....Accessories

MS-ST44K .....Repair kit