


## HEAVY DUTY WING SERIES INTERCHANGE

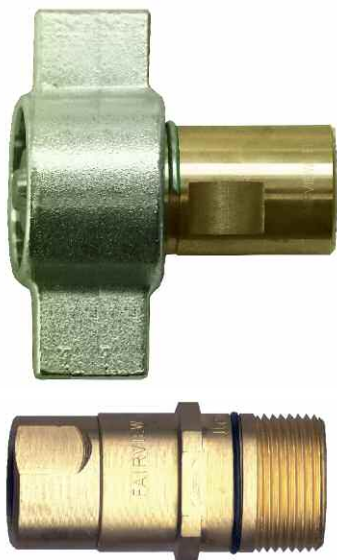

- Interchangeable with Aeroquip 5100 series and Parker 6100 series.
- Heavy duty wing nut or hex nut for easy connection.
- Thread-To-Connect.
- Dry-Break feature minimizes air inclusion and contamination of systems.
- Up to 3,000 PSI connected and disconnected.
- Ideal for use on hydraulic dump trucks, coal trucks, sand and salt spreaders and oil well equipment.

Operating Pressure		Air Inclusion	Spillage
Size	(PSI)	CC. Max.	CC. Max.
3/4	3000	.34	.26
1	3000	.50	.35
1-1/4	2750	.68	.70
1-1/2	2750	.60	.94

### VALVED COUPLER - BRASS

PART No.	Body Size	Female Pipe
QD-BTTWC12-12F	3/4	3/4
QD-BTTWC16-16F	1	1
QD-BTTWC20-20F	1-1/4	1-1/4
QD-BTTWC24-24F	1-1/2	1-1/2

### VALVED NIPPLE - BRASS

PART No.	Body Size	Female Pipe
QD-BTTWN12-12F	3/4	3/4
QD-BTTWN16-16F	1	1
QD-BTTWN20-20F	1-1/4	1-1/4
QD-BTTWN24-24F	1-1/2	1-1/2

## HEAVY DUTY WING INTERCHANGE (BTTW) ACCESSORIES



### BRASS DUST CAP

PART No.	Size
QD-BTTWDC-12	3/4
QD-BTTWDC-16	1
QD-BTTWDC-20	1-1/4
QD-BTTWDC-24	1-1/2



### BRASS DUST PLUG

PART No.	Size
QD-BTTWDP-12	3/4
QD-BTTWDP-16	1
QD-BTTWDP-20	1-1/4
QD-BTTWDP-24	1-1/2

## THREAD-TO-CONNECT (CONNECT UNDER PRESSURE)



- Connect under pressure - designed for up to 5,000 PSI operating pressures.
- Thread-To-Connect valves shut off automatically during connection under normal circumstances.
- Superior flow and low pressure drop.
- Large capacity.

### VALVED COUPLER - STEEL

PART No.	Body Size	Female Pipe
QD-75C12-12F	3/4	3/4
QD-75C16-16F	1	1

### VALVED NIPPLE - STEEL

PART No.	Body Size	Female Pipe
QD-75N12-12F	3/4	3/4
QD-75N16-16F	1	1