

57010 57020 57030 57040
SWIVEL-GRIPPER™
“NO-SLIP” FILTER WRENCH

Tough, Stainless Steel Band with Permanently Bonded Textured Coating for Superior Gripping Power...won't Slip.

Swivel handle makes it easy to turn in tight spots. Handle swivels more than 180° with adjustable tension. Tension adjusting nut allows swivel pressure to be regulated — no more floppy filter wrenches. Patented coating process adds many additional gripping points to securely grab the filter. Extra Small Swivel-Gripper has a special narrow 1/2" band to fit into tight places. Can also be used on some fuel filters. Large Swivel-Gripper fits many tractors and other farm implement products.

57010 Extra Small Swivel-Gripper. Range 2.375" - 2.625" (60.3 - 66.7mm).

Skin-packed. Shipping wt. 12 oz.

57020 Small Swivel-Gripper. Range 2.875" - 3.25" (73 - 82.5mm).

Skin-packed. Shipping wt. 12 oz.

57030 Standard Swivel-Gripper. Range 3.5" - 3.875" (88.9 - 98.4mm).

Skin-packed. Shipping wt. 13 oz.

57040 Large Swivel-Gripper. Range 4.125" - 4.5" (104.7 - 114.3mm).

Skin-packed. Shipping wt. 13 oz.



Gripping Texture

Swivels More Than 180°

Tension Adjusting Nut

U.S. Pat No. 8,573,094

FILTER

57050 57060 57070
SWIVEL-GRIPPER™
“NO-SLIP” FILTER WRENCHES
FOR CUMMINS & DETROIT DIESEL,
JOHN DEERE AND CATERPILLAR

Tough, Stainless Steel Band with Permanently Bonded Textured Coating for Superior Gripping Power...Won't Slip.

For Cummins & Detroit Diesel, John Deere and Caterpillar engines. “Swivel Grip” handle makes it easy to turn in tight spots. Handle made of tubular steel for increased strength.

57050 “No-Slip” Filter Wrench for Cummins & Detroit Diesel, Range 4-5/16" - 4-3/4"


(109.5mm - 120.7mm). Skin-packed. Shipping wt. 13 oz.

57060 “No-Slip” Filter Wrench for John Deere, Range 4-3/4" - 5-3/16" (120.7 - 131.8mm)

Skin-packed. Shipping wt. 13 oz.

57070 “No-Slip” Filter Wrench for Caterpillar, Range 5-1/4" - 5-3/4" (133.5 - 146mm)

Skin-packed. Shipping wt. 13 oz.

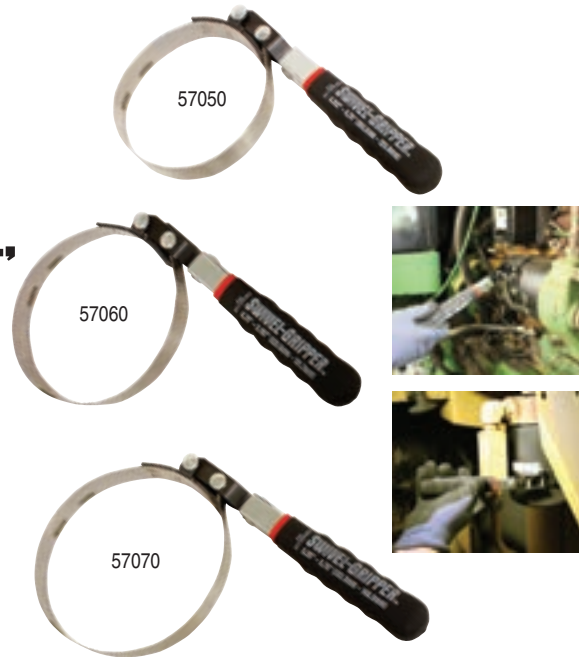

57050

57060

57070

57160 SWIVEL-GRIPPER™ 9 PACK

A Handy Merchandiser that Comes with Nine Swivel-Gripper “No-Slip” Filter Wrenches.

Allows users to feel the texture coating on the inside of the wrench band. Individual Swivel-Gripper filter wrenches can be ordered to refill the display as needed. All four wrench sizes are included.

57160 Swivel Gripper 9 Pack. Boxed. Shipping wt. 6 lbs. 3 oz.



Contents:


- 2 - 57010 Import “No Slip” Filter Wrench 2.375" - 2.625" (60.3 - 66.7MM)
- 2 - 57020 Small “No Slip” Filter Wrench 2.875" - 3.25" (73 - 82.5MM)
- 3 - 57030 Standard “No Slip” Filter Wrench 3.5" - 3.875" (88.9 - 98.4MM)
- 2 - 57040 Large “No Slip” Filter Wrench 4.125" - 4.5" (104.7 - 114.3MM)

53200 53250 53500 53700 54200 54300 54400 "SWIVEL GRIP" OIL FILTER WRENCHES


Handle Swivels to Clear Obstructions.

All models feature the swivel handle, gripper "teeth" and 1" wide stainless steel band. The swivel handle makes it easy to turn filters in hard to reach locations. Vinyl covered handle.

- 53200 John Deere Oil Filter Wrench.** Range 4.75" - 5.1875" (120.7 - 131.8mm).
Skin-packed. Shipping wt. 14 oz.
- 53250 Large Swivel Grip Oil Filter Wrench.** Range 4.125" - 4.5" (104.7 - 114.3mm).
Skin-packed. Shipping wt. 12 oz.
- 53500 Standard Swivel Grip Oil Filter Wrench.** Range 3.5" - 3.875" (88.9 - 98.4mm).
Skin-packed. Shipping wt. 12 oz. NSN 5120-00-228-6287
- 53700 Small Swivel Grip Oil Filter Wrench.** Range 2.875" - 3.25" (73 - 82.5mm).
Skin-packed. Shipping wt. 12 oz.
- 54200 Oil Filter Wrench for Cummins & Detroit Diesel Engines.**
Range 4.3125" - 4.75" (109.5 - 120.7mm). Skin-packed. Shipping wt. 13 oz.
- 54300 Oil Filter Wrench for Caterpillar Engines.** Range 5.25" - 5.75" (133.5 - 146mm). Skin-packed. Shipping wt. 14 oz.
- 54400 Swivel Grip Oil/Fuel Filter Wrench.** Range 2.375" - 2.625" (60.3 - 66.7mm).
Skin-packed. Shipping wt. 11 oz.

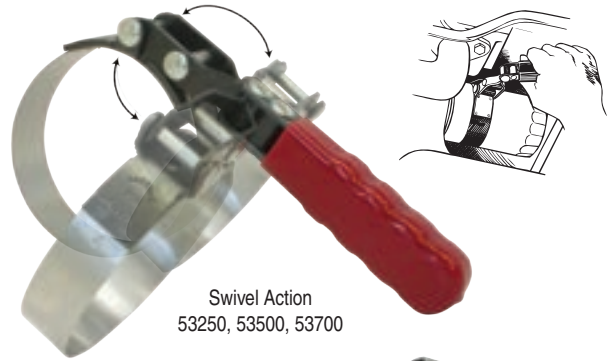


Swivel Action
53250, 53500, 53700

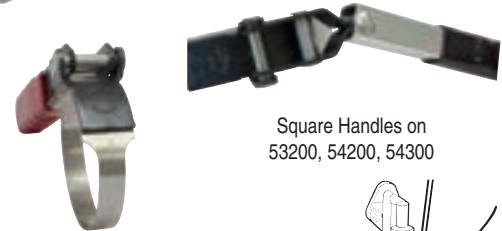

Square Handles on
53200, 54200, 54300

54400 Has Special
Narrow 1" Band




Fuel Filter

53900 FILTER WRENCH

Straight Handle Filter Wrench.

1" stainless steel band with special "teeth" grips tightly. Vinyl-covered handle provides firm, comfortable grip.

53900 Filter Wrench. Range 3-1/2" to 3-7/8" (88.9 - 98.4mm). Skin-packed. Wt. 11 oz

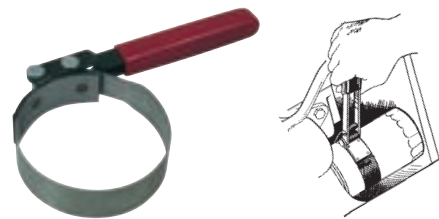

61450 10 PC. HEAVY DUTY END CAP FILTER WRENCH SET 61500 17 PC. HEAVY DUTY END CAP FILTER WRENCH MASTER SET

Heavy Duty Design with a Welded Steel Plate for Strength.

Two collections of end cap filter wrenches to fit the most popular domestic and import vehicles.

61450 10 pc. Heavy Duty End Cap Filter Wrench Set.

Molded Case. Shipping wt. 4 lbs. 15 oz.

61500 17 pc. Heavy Duty End Cap Filter Wrench Master Set.

Molded Case. Shipping wt. 7 lbs. 12 oz.

61510 93mm-45 flutes	61520 73/74mm-14 flutes
61530 82mm-15 flutes	*61540 65/67mm-14 flutes
*61550 80mm-15 flutes	*61560 74/76mm-15 flutes
*61570 76mm-14 flutes	*61580 93mm-15 flutes
*61590 93mm-36 flutes	*61600 65mm-14 flutes
61610 86mm-14 flutes	61620 88.4mm-15 flutes
61630 96mm-18 flutes	61640 68mm-14 flutes
61650 76mm-30 flutes	61660 86mm-16 flutes
61670 100mm-15 flutes	

*Available hang tag packaged for display. Others are available mini-pouched.



61450 Includes:

61540	61550	61560
61570	61580	61590
61600	61640	61650
61660		

61500 Includes:

61510	61520	61530
61540	61550	61560
61570	61580	61590
61600	61610	61620
61630	61640	61650
61660	61670	



SECURE WELDS ON
STEEL PLATE

13300 5 PC. FILTER SOCKET SET

Set of 5 Low Profile Oil and Fuel Filter Canister Sockets in One Handy Case.

Contains very low profile, 6 point 24mm, 27mm, 29mm, 32mm and 35/36mm sockets for use on oil and fuel filter canisters when replacing the element. Use with 3/8" drive. 5 pc. Set includes:

13310 - 24mm for Cadillac and some BMW

13320 - 27mm for 2003 and later Mercedes 1.8L, Smart and some VW



***14500** - 35/36mm for Ford 6.0L Diesel Fuel and Oil Filter Housings, Mini Cooper and some BMW Oil Filter Housings, and Mack Truck Oil Filter Housing

***14600** - 29mm (1-1/8") for Dodge Cummins Fuel Filter Housing

***14700** - 32mm (1-1/4") for GM Ecotec, 2.0L, 2.2L and 2.4L Four Cylinder Oil Filter Housing; Some Saturn & Saab

13300 5 Pc. Filter Socket Set. Molded Case. Shipping wt. 1 lb. 13 oz.

*Available individually packaged for display.



60200 HEAVY DUTY STRAP FILTER WRENCH

A Heavy-Duty Heat Treated Alloy Steel Yoke and Strong Web Strap.

Use with 1/2" drive to remove or install filters and other objects up to 6-1/2" in diameter. 3-5/8" long yoke fits into tight areas.

60200 Heavy Duty Strap Filter Wrench. Skin-packed. Shipping wt. 8 oz.




FILTER

63500 "BIG RANGE" FILTER WRENCH

For Filters Up to 6" (152.4mm).

Adjusts quickly to fit any spin-on oil filter up to 6" diameter. Use with 1/2" drive or 3/4" wrench. Strong polypropylene belt.

63500 Big Range Filter Wrench. Skin-packed. Shipping wt. 10 oz.



63250 63600 FILTER WRENCHES

63250 Range from 3-1/8" to 3-7/8".

63600 Range from 2-1/2" to 3-1/8".

Steel jaws grip filter without slipping. Works in tight spots from the front of the filter using 3/8" drive.


63250 Wide Range Filter Wrench. Skin-packed. Shipping wt. 14 oz.

63600 Import Car Filter Wrench. Skin-packed. Shipping wt. 14 oz.

63630 Replacement Spring



63250



63600


50750 50950 OIL FILTER PLIERS

Two Position, Slip Joint Handle for Greater Range. 50750 Range from 2-1/4" to 4". 50950 Range from 3-5/8" to 6".

Sure grip teeth prevent slipping. Cushioned handles provide comfort.

50750 Oil Filter Pliers. Skin-packed. Shipping wt. 1 lb. 5 oz.

50950 Truck and Tractor Oil Filter Pliers. Skin-packed. Shipping wt. 1 lb. 13 oz.

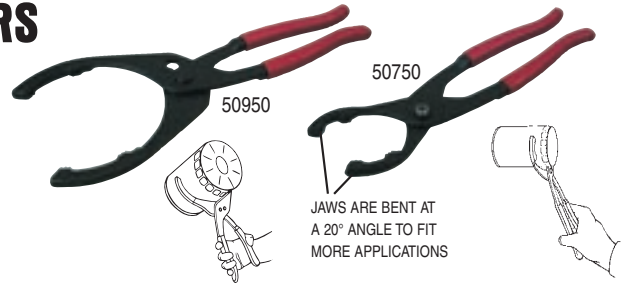


53100 ADJUSTABLE OIL FILTER WRENCH

For Trucks and Tractors. Fits John Deere, Case, Caterpillar, Mack, Detroit Diesel and Others.

Tough, stainless steel band adjusts for extra range... won't slip. Professional quality. 1/2" square drive. Range 4-3/8" - 5-5/8" (111.1 - 142.8mm).

53100 Adjustable Oil Filter Wrench. Skin-packed. Shipping wt. 14 oz.

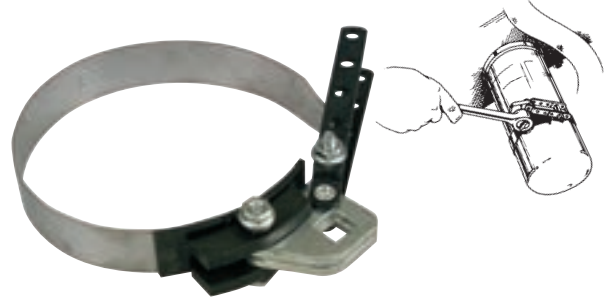


53400 UNIVERSAL 3" OIL FILTER WRENCH

Remove and Install All 3" Filters.

Works in the tightest spots. Stainless steel band, gripper teeth...won't slip. 3/8" square drive.

53400 Universal 3" Oil Filter Wrench. Skin-packed. Shipping wt. 8 oz.

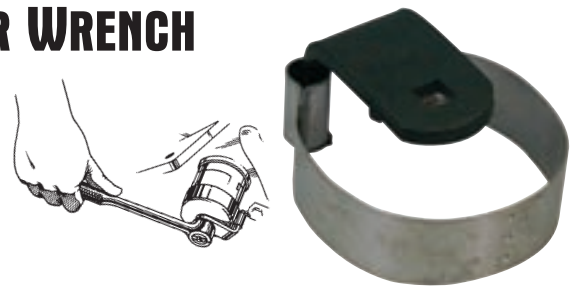

58850 OIL PAN PLUG RETHREADING KIT

Removes Damaged Thread and Taps a New Oversize Thread.

This set includes a piloted drill, spring-loaded tapping tool and 5 magnetic drain plugs. The unique tapping tool ensures the new thread will be perpendicular to the gasket surface to prevent leakage. Works on soft steel and aluminum oil pans with 1/2", 12mm & 14mm threads. Can be used on the vehicle when room permits.

58850 Oil Pan Plug Rethreading Kit. Molded Case. Shipping wt. 2 lb. 1 oz.

58650 Plugs & Gaskets (Set of 5)

58880 Piloted Drill Assembly

58900 Tap



DRILLING DRAIN HOLE



TAPPING DRAIN HOLE